

Specification sheet

XD 220

FAN 6X2 Rigid, Electric



ENGINES	
XD Electric 170 PACCAR EX-D1 (170 kW /	210 kWh 315 kWh 420 kWh 525 kWh)
XD Electric 220 PACCAR EX-D1 (220 kW /	315 kWh 420 kWh 525 kWh)
XD Electric 270 PACCAR EX-D1 (270 kW /	315 kWh 420 kWh 525 kWh)
XD Electric 270 PACCAR EX-D2 (270 kW /	315 kWh 420 kWh 525 kWh)
XD Electric 310 PACCAR EX-D2 (310kW /	420 kWh 525 kWh)
XD Electric 350 PACCAR EX-D2 (350kW /	420 kWh 525 kWh)

GVM ¹⁾	GCM ²⁾
26000 kg	29000 kg
Max. front 8000 kg	
Max. rear 19000 kg	

016F0120NAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm.; Cab suspension mechanical; LED head lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	07201 Skylights
03353 Chassis front execution: protruding	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
01226 Cab suspension air	07343 Kerb view window co-driver door
04355 Air horns, prepared	01886 Laminated glass with solar control foil
00847 Air horns, single set	01354 No main mirrors
09006 Air horns, double set	01362 DAF Digital Vision System
00330 LED head and fog lights	01912 No DAF Corner View
00346 LED head and cornering lights	06497 No rear view camera
00354 LED head, cornering and fog lights	03151 Rear view camera with prep for 2nd camera
02591 High Beam Assist	

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01818 Adj. roof air deflector long low Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16150 No roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16159 No cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; Park air conditioning, integrated.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	03628 DAF drowsiness & distraction detection
02567 No Traffic Sign Assist	01929 No Drive-off Assist
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1344; Rear springs air; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

Optional

04813 Front: 8.00 t, parabolic, 165N	07114 Front: 10.00 t, parabolic, 203L
02509 Front: 8.00 t, parabolic, 167N	02460 Front: 8.00 t, air suspension, 161N
02426 Front: 9.00 t, parabolic, 183N	04647 Front springs air
00300 Front: 9.00 t, parabolic, 187N	08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

- 08101** No tyre pressure monitoring
- 16152** Tyre makes and types

DRIVELINE

; 220 kW; 150 kW DC charging; Rear axle ratio 2.38; No differential lock.

Optional

- 01656** Electric motor type EX-D2
- 01664** 170 kW
- 01686** 270 kW
- 01691** 310 kW
- 01692** 350 kW
- 01749** Charging: 150 kW DC + 22 kW AC
- 01756** 325 kW DC charging
- 03677** Charging: 325 kW DC + 22 kW AC
- 02843** Mechanical differential lock

BRAKE SYSTEM

Park brake control electro-pneumatic; No brake resistor; Park brake electro-pneumatic; Driven rear axle with disc brakes.

Optional

- 04901** Spring brake cylinders on the first front axle
- 03969** Park brake assist
- 01857** Brake resistor

CHASSIS

Wheelbase 4.60 m / rear overhang 2.55 m; Side member 260/7.0 mm, full length reinforcement; Side member height 260 mm; No HV battery pack at position L1; HV battery pack at position L2; No HV battery pack at position L3; No HV battery pack at position R1; HV battery pack at position R2; No HV battery pack at position R3.

Optional

- 02601** Side member height 310 mm
- 01699** 4 HV battery packs
- 01701** 5 HV battery packs
- 16157** Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

- 09421** Additional spare wiring
- 02950** Application connector for hydraulic platform

POWER TAKE-OFF (PTO)

Optional

- 01809** E-PTO socket 650V DC < 25 kW
- 04320** E-PTO socket 650V DC < 90 kW
- 07853** ePTO control at ignition OFF
- 07852** ePTO control at ignition ON

24V POWER SUPPLY

Batteries 2x 175 Ah..

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 29000 kg.

Optional

- 01933** Driveline related max GCM 42000 kg
- 01937** Driveline related max GCM 46000 kg
- 02200** Driveline related max GCM 46000 kg class 2
- 03675** Driveline related max GCM 50000 kg class 3

APPLICATION CONDITIONS

Regular cab insulation.

Optional

- 02260** Extra cab insulation

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

VEHICLE DELIVERY


Optional

- 02008** No toolkit
- 02019** Standard toolkit
- 06491** Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

XD 220

FAN 6X2 Rigid, Electric

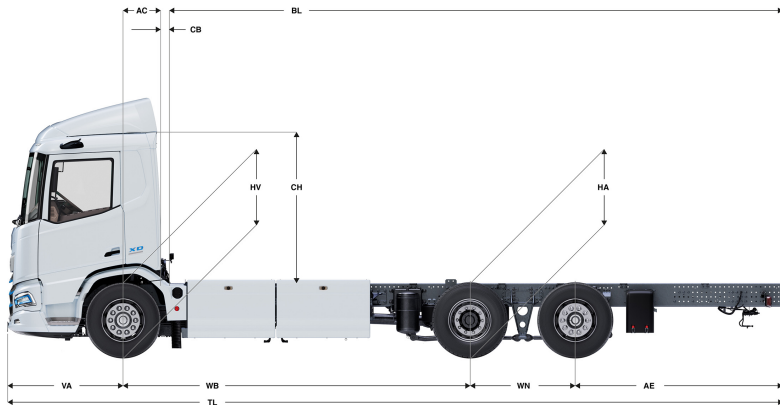

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁸⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
DAY CAB	3,80	2,05	6160	3699	9859	1840	15301	16141	0,50	0,07	2,06	6,62	6,62	8,78	0,97	0,94	13,50	14,88
	3,90	2,50	5753	4412	10165	2247	14588	15835	0,50	0,07	2,01	6,56	6,56	9,33	1,02	0,99	13,75	15,14
	4,00	2,40	6207	3790	9997	1793	15210	16003	0,50	0,07	2,01	6,99	6,99	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	5808	4220	10028	2192	14780	15972	0,50	0,07	2,06	7,11	7,11	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	5883	4270	10153	2117	14730	15847	0,50	0,07	2,06	7,49	7,49	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	5945	4216	10161	2055	14784	15839	0,50	0,07	2,06	7,88	7,88	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	5997	4222	10219	2003	14778	15781	0,50	0,07	2,06	8,25	8,25	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	6043	4190	10233	1957	14810	15767	0,50	0,07	2,06	8,74	8,74	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	6077	4170	10247	1923	14830	15753	0,50	0,07	2,06	9,20	9,20	11,38	0,97	0,94	17,39	18,84
SLEEPER CAB	5,60	3,15	6475	3830	10305	1525	15170	15695	0,50	0,07	2,01	10,03	10,03	11,68	1,02	1,00	18,18	19,63
	6,10	2,90	6580	3800	10380	1420	15200	15620	0,50	0,07	2,01	11,00	11,00	11,93	1,02	1,00	19,49	20,96
	4,20	2,40	5925	4214	10139	2075	14786	15861	0,83	0,07	2,06	6,51	6,51	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	6000	4264	10264	2000	14736	15736	0,83	0,07	2,06	6,91	6,91	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	6062	4211	10273	1938	14789	15727	0,83	0,07	2,06	7,29	7,29	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	6114	4217	10331	1886	14783	15669	0,83	0,07	2,06	7,67	7,67	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	6159	4185	10344	1841	14815	15656	0,83	0,07	2,06	8,14	8,14	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	6193	4166	10359	1807	14834	15641	0,83	0,07	2,06	8,62	8,62	11,38	0,97	0,94	17,39	18,84
	5,60	3,15	6588	3826	10413	1412	15174	15587	0,83	0,07	2,01	9,44	9,44	11,68	1,02	1,00	18,18	19,63
SLEEPER HIGH CAB	6,10	2,90	6692	3796	10488	1308	15204	15512	0,83	0,07	2,01	10,44	10,44	11,93	1,02	1,00	19,49	20,96
	4,20	2,40	5956	4214	10169	2044	14786	15831	0,83	0,07	2,54	6,52	6,52	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	6030	4264	10294	1970	14736	15706	0,83	0,07	2,54	6,92	6,92	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	6092	4210	10303	1908	14790	15697	0,83	0,07	2,54	7,31	7,31	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	6144	4217	10361	1856	14783	15639	0,83	0,07	2,54	7,69	7,69	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	6189	4185	10374	1811	14815	15626	0,83	0,07	2,54	8,15	8,15	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	6223	4165	10389	1777	14835	15611	0,83	0,07	2,54	8,64	8,64	11,38	0,97	0,94	17,39	18,84
	5,60	3,15	6618	3825	10443	1382	15175	15557	0,83	0,07	2,49	9,46	9,46	11,68	1,02	1,00	18,18	19,63
	6,10	2,90	6722	3795	10517	1278	15205	15483	0,83	0,07	2,49	10,46	10,46	11,93	1,02	1,00	19,49	20,96

OTHER DIMENSIONS	VA: 1,53	WN: 1,40	HV ¹²⁾ : 0,94	HV ¹³⁾ : 0,90	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with driver of [0] kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle (trailing axle down).

9) Laden height at centre of driven axle(s).

10) TK = turning circle between kerbs.

11) TW = turning circle between walls.

12) Unladen height at centre of front axle(s).

13) Laden height at centre of front axle(s).

14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.