


Specification sheet

XD 370

FAX 8X2 Rigid



ENGINES

- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 32000 kg
-
- Max. front 16000 kg
- Max. rear 19000 kg

GCM²⁾

- 38000 kg
-
-
-

016F0191XAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02941 Chassis front execution: bottom plate	06629 Two hazard beacon lights
03353 Chassis front execution: protruding	07201 Skylights
07586 Chassis front execution: robust	03232 Front windscreen with solar control foil
01226 Cab suspension air	03317 Rear window: double glass
04355 Air horns, prepared	07343 Kerb view window co-driver door
00847 Air horns, single set	01886 Laminated glass with solar control foil
09006 Air horns, double set	01354 No main mirrors
00330 LED head and fog lights	01362 DAF Digital Vision System
00346 LED head and cornering lights	01912 No DAF Corner View
00354 LED head, cornering and fog lights	06497 No rear view camera
02591 High Beam Assist	03151 Rear view camera with prep for 2nd camera

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

01698 Adj. rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16154 Roof air deflectors, types and settings
01818 Adj. roof air deflector long low Sleeper High Cab	

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control (ACC) with FCW; No Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	01219 Speakers: Exclusive
07021 PACCAR Connect with navigation and tablet software	09908 Cruise control
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	08023 Adaptive Cruise Control with FCW and AEBS-3
03684 Infotainment including DAF Truck Navigation	06991 Predictive Cruise Control

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09491 Vehicle Stability Control (VSC)
02567 No Traffic Sign Assist	00795 Safety regulations EC ADR
02569 No Driver State Monitoring	16156 EC-ADR packages
03628 DAF drowsiness & distraction detection	01929 No Drive-off Assist
09991 No Lane Departure Warning System	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 2x 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1344; Rear springs air; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

Optional

02345 Front: 2x 8.00 t, parabolic, 165N	04057 Rear axle HR1356
04155 Front: 2x 9.00 t, parabolic, 183N	08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5;
Second driven rear or trailing axle: 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

- 08101** No tyre pressure monitoring
16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres.
Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1950 Nm at 900-1125 rpm.; Automated gearbox, TraXon, 12 speeds.;
Automated direct drive gearbox TraXon 12TX2010, ratio 16.69-1.00, 12 speeds.; Rear axle ratio 2.38; Mechanical differential lock.

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with disc brakes.

Optional

- 02287** Exhaust brake
02281 ZF Intarder
02304 MX Engine Brake and ZF Intarder
02715 ZF Intarder
01572 Park brake control electro-pneumatic
01497 Park brake control pneumatic with spoken warning
04375 Park brake electro-pneumatic
03969 Park brake assist
00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 5.00 m / rear overhang 1.75 m; Side member 310/7.0 mm, full length reinforcement; Side member height 310 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box.

Optional

- 16157** Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

- 09421** Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 35000 kg; Driveline related max GCM 38000 kg class 2.

Optional

- 00209** Driveline related max GCM 40000 kg class 3
03673 Driveline related max GCM 44000 kg class 2
03675 Driveline related max GCM 50000 kg class 3
00939 Driveline related max GCM 56000 kg class 2
00818 Driveline related max GCM 60000 kg class 3

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

- 08400** Silent mode
02260 Extra cab insulation
03648 Cyclonic air intake high

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended


VEHICLE DELIVERY

Optional

- 02008** No toolkit
02019 Standard toolkit
06492 Toolkit Türkiye
06491 Toolkit Eastern Europe

XD 370

FAX 8X2 Rigid

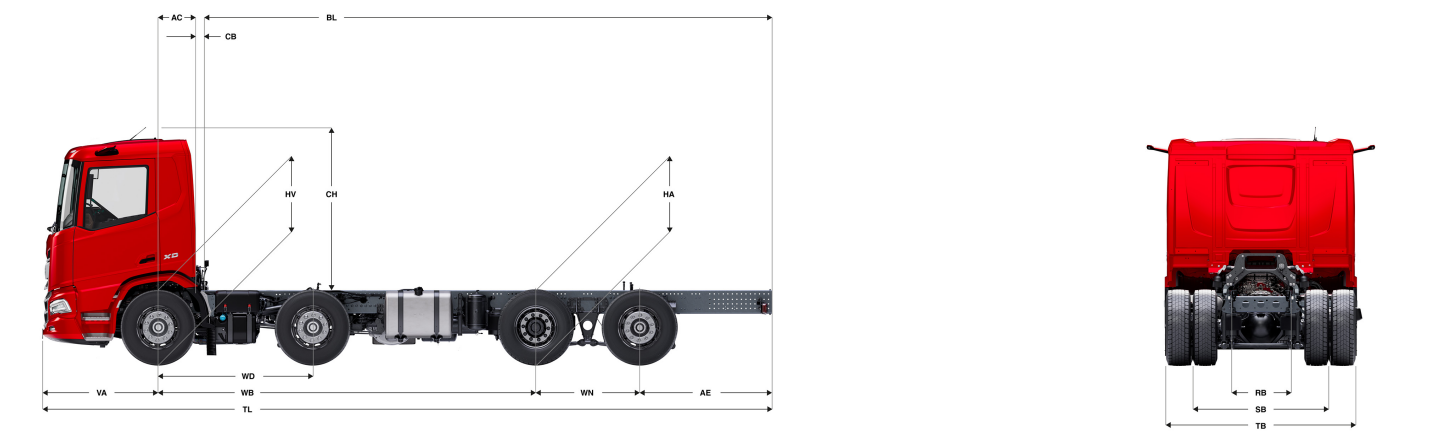

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,00	1,75	7259	2364	9623	8741	16636	22377	0,50	0,07	2,01	6,86	7,56	9,68	1,02	0,99	18,25	19,55
	5,70	2,00	7104	2596	9699	8896	16404	22301	0,50	0,07	2,01	7,70	8,50	10,63	1,02	0,99	20,28	21,60
	6,40	2,60	7141	3027	10167	8859	15973	21833	0,50	0,07	2,01	8,54	9,49	11,93	1,02	0,99	22,32	23,65
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,00	1,75	7404	2334	9738	8596	16666	22262	0,83	0,07	2,01	6,23	6,94	9,68	1,02	0,99	18,25	19,55
	5,70	2,00	7244	2570	9814	8756	16430	22186	0,83	0,07	2,01	7,08	7,90	10,63	1,02	0,99	20,28	21,60
	6,40	2,60	7278	3004	10282	8722	15996	21718	0,83	0,07	2,01	7,93	8,86	11,93	1,02	0,99	22,31	23,65
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,00	1,75	7440	2327	9768	8560	16673	22232	0,83	0,07	2,49	6,24	6,94	9,68	1,02	0,99	18,25	19,55
	5,70	2,00	7280	2564	9844	8720	16436	22156	0,83	0,07	2,49	7,09	7,90	10,63	1,02	0,99	20,28	21,60
	6,40	2,60	7313	2999	10312	8687	16001	21688	0,83	0,07	2,49	7,95	8,88	11,93	1,02	0,99	22,31	23,65

OTHER DIMENSIONS	VA: 1,53	WD: 2,05	WN: 1,40	HV ¹²⁾ : 1,06	HV ¹³⁾ : 0,98	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle (trailing axle down).

9) Laden height at centre of driven axle(s).

10) TK = turning circle between kerbs.

11) TW = turning circle between walls.

12) Unladen height at centre of front axle(s).

13) Laden height at centre of front axle(s).

14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.