

Specification sheet

XD 300

FAR 6X2 Rigid, single mounted trailing axle



XD

ENGINES

- XD NewGen 300 MX-11 (220 kW / 299 hp)
- XD NewGen 340 MX-11 (251 kW / 341 hp)
- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

26000 kg

Max. front 8000 kg

Max. rear 19000 kg

GCM²⁾

38000 kg

016F012CAAA - 202345C - 18-08-2023

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

OPTION PACKAGES

Optional

17448 Safety pack **17595** Executive Pack XD/XF

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Corner View.

Optional

07018 Sleeper Cab **01836** LED Skylights
06244 Sleeper High Cab **00949** LED Skylights; aux. LED lights on cab rf, prepared
02889 Chassis front execution: no bottom plate **01925** Two LED work lamps for cab rear wall
02952 Chassis front execution: bottom plate aero **01891** Hazard beacons on cab front, prepared
03353 Chassis front execution: protruding **06629** Two hazard beacon lights
07586 Chassis front execution: robust **03232** Front windscreen with solar control foil
01226 Cab suspension air **03317** Rear window: double glass
03358 External sun visor **07343** Kerb view window co-driver door
03922 Fog lights front **01362** DAF Digital Vision System
00936 Auxiliary LED lights on cab roof, prepared

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab **00097** Adj. roof air deflector for Sleeper Cab
00124 Adj. rf air defl.long mid >4m(!) Sleeper High Cab **00020** Adj. roof air deflector long low Sleeper High Cab
01538 Adj. roof air defl. long high >4m(!) Sleeper High **02662** Adj. roof air deflector long mid Sleeper High Cab
00082 Adj. roof air deflector for Day Cab

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and aircoc; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents **02117** Third seat
02355 Steering wheel, leather **02837** Dashboard table
02353 Cab interior decoration: Argenta **03948** Single drawer
02350 Cab interior decoration: Natura **03954** Refrigerator
07733 Driver seat: Luxury Air **02838** Foam mattress for lower bunk
07736 Driver seat: Super Air **02854** Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air **01775** Xtra Comfort mattress with topper for lower bunk
09541 Arm rest driver seat **06970** Automatic Cab Climate Control
01740 Arm rest at both sides of the driver seat

COMMUNICATION AND DRIVING MANAGEMENT

DAF Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85 km/h; Eco off 90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3.

Optional

09681 Preparation for Maut **01915** DAF Infotainment System: Luxury Plus
06211 DAF Infotainment System with FM/DAB/DAB+ radio **06991** Predictive Cruise Control
03470 DAF Infotainment System: Exclusive, prepared

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners **00795** Safety regulations EC ADR
06410 Safe Load Pass preparation

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 12.00 t; Rear: 19.50 t, air suspension, SR1344; Trailing axle load 7.5t; Lifting device.

Optional

06257 Front axle load 9.00 t **04588** Rear axle SR1347
04647 Front springs air **03040** Rear axle load 11.50 t
04057 Rear axle HR1356 **08191** Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P; R2,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX1810 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.08.

Optional

07110 Eco performance **08371** Long Combination Vehicle (LCV)
02313 Gearbox direct drive **09638** Off-road applications
01514 Urge-to-move **01498** Off-road applications with Rock-free function
07101 Standard transport, Lite version **02843** Mechanical differential lock
09637 Liquid transport

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS)..

Optional

09921 MX Engine Brake	01497 Park brake control pneumatic with spoken warning
02715 ZF Intarder	
01572 Park brake control electro-pneumatic	04901 Spring brake cylinders on the first front axle
	00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 3.80 m / rear overhang 2.05 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
08641 Air tanks aluminium	03323 Rear light with LEDs
16157 Fuel tanks, material and sizes	

DRAWBAR AND TRAILER EQUIPMENT

Closing member.

Optional

07033 Trailer coupling Ringfeder D=13.7	08027 Trailer coupling Rockinger D=20.0
07034 Trailer coupling Ringfeder D=20.0	04659 Trailer cable EBS
08026 Trailer coupling Rockinger D=13.0	

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring	09208 Chassis preparation for BDF Multi system
09201 Chassis preparation for BDF	08121 Tail lift application

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

Optional

04492 Alternator 130 A	07671 Batteries 2x210Ah AGM C-type
08775 Alternator 150 A	
08797 Batteries 2x175Ah	06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation	06614 Anti-dust blow-up shield
03648 Cyclonic air intake high	

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended
--

VEHICLE DELIVERY

Minimum toolkit.

Optional



07569 Lifting jack



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XD 300

FAR 6X2 Rigid, single mounted trailing axle

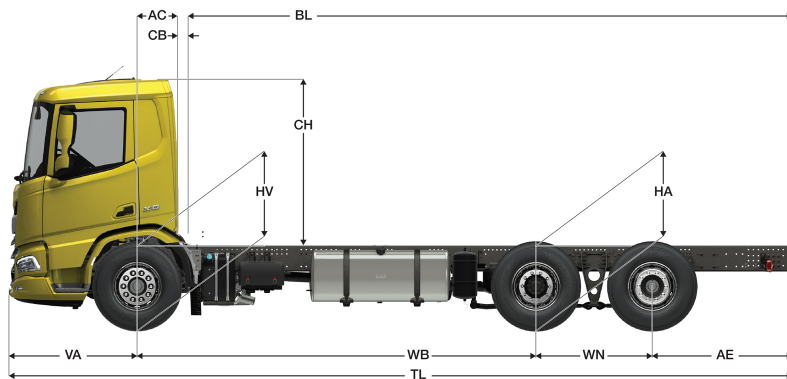

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
DAY CAB	3,80	2,05	4746	2977	7722	3254	16023	18278	0,50	0,07	2,06	6,04	6,04	8,78	0,97	0,94	14,88	16,29
	4,20	2,40	4729	3056	7784	3271	15944	18216	0,50	0,07	2,06	6,69	6,69	9,53	0,97	0,94	15,92	17,35
	4,40	2,55	4729	3112	7841	3271	15888	18159	0,50	0,07	2,06	7,01	7,01	9,88	0,97	0,94	16,44	17,88
	4,60	2,55	4786	3229	8016	3214	15771	17984	0,50	0,07	2,06	7,36	7,36	10,08	0,97	0,94	16,96	18,40
	4,80	2,70	4766	3258	8024	3234	15742	17976	0,50	0,07	2,06	7,67	7,67	10,43	0,97	0,94	17,48	18,93
	5,05	2,90	4754	3303	8057	3246	15697	17943	0,50	0,07	2,06	8,09	8,09	10,88	0,97	0,94	18,14	19,59
	5,30	2,90	4761	3321	8082	3239	15679	17918	0,50	0,07	2,06	8,50	8,50	11,13	0,97	0,94	18,79	20,26
5,60	2,85	4807	3414	8221	3193	15586	17779	0,50	0,07	2,01	9,01	9,01	11,38	1,02	0,99	19,58	21,05	
5,90	2,80	4820	3426	8246	3180	15574	17754	0,50	0,07	2,01	9,50	9,50	11,63	1,02	0,99	20,36	21,84	
6,10	2,80	4826	3439	8265	3174	15561	17735	0,50	0,07	2,01	9,84	9,84	11,83	1,02	0,99	20,89	22,37	
SLEEPER CAB	3,80	2,05	4746	2977	7722	3254	16023	18278	0,50	0,07	2,06	6,04	6,04	8,78	0,97	0,94	14,88	16,29
	4,20	2,40	4830	3059	7888	3170	15941	18112	0,83	0,07	2,06	6,07	6,07	9,53	0,97	0,94	15,92	17,35
	4,40	2,55	4830	3115	7945	3170	15885	18055	0,83	0,07	2,06	6,40	6,40	9,88	0,97	0,94	16,44	17,88
	4,60	2,55	4887	3232	8119	3113	15768	17881	0,83	0,07	2,06	6,74	6,74	10,08	0,97	0,94	16,96	18,40
	4,80	2,70	4867	3261	8128	3133	15739	17872	0,83	0,07	2,06	7,06	7,06	10,43	0,97	0,94	17,48	18,93
	5,05	2,90	4856	3306	8161	3144	15694	17839	0,83	0,07	2,06	7,48	7,48	10,88	0,97	0,94	18,14	19,59
	5,30	2,90	4862	3323	8186	3138	15677	17814	0,83	0,07	2,06	7,89	7,89	11,13	0,97	0,94	18,79	20,26
5,60	2,85	4909	3416	8325	3091	15584	17675	0,83	0,07	2,01	8,40	8,40	11,38	1,02	0,99	19,58	21,05	
5,90	2,80	4921	3428	8350	3079	15572	17650	0,83	0,07	2,01	8,90	8,90	11,63	1,02	0,99	20,36	21,84	
6,10	2,80	4927	3441	8369	3073	15559	17631	0,83	0,07	2,01	9,24	9,24	11,83	1,02	0,99	20,89	22,37	
SLEEPER HIGH CAB	3,80	2,05	4746	2977	7722	3254	16023	18278	0,50	0,07	2,06	6,04	6,04	8,78	0,97	0,94	14,88	16,29
	4,20	2,40	4860	3058	7918	3140	15942	18082	0,83	0,07	2,54	6,08	6,08	9,53	0,97	0,94	15,92	17,35
	4,40	2,55	4861	3114	7975	3139	15886	18025	0,83	0,07	2,54	6,41	6,41	9,88	0,97	0,94	16,44	17,88
	4,60	2,55	4918	3231	8149	3082	15769	17851	0,83	0,07	2,54	6,75	6,75	10,08	0,97	0,94	16,96	18,40
	4,80	2,70	4897	3261	8158	3103	15739	17842	0,83	0,07	2,54	7,08	7,08	10,43	0,97	0,94	17,48	18,93
	5,05	2,90	4886	3305	8191	3114	15695	17809	0,83	0,07	2,54	7,48	7,48	10,88	0,97	0,94	18,14	19,59
	5,30	2,90	4893	3323	8215	3107	15677	17785	0,83	0,07	2,54	7,91	7,91	11,13	0,97	0,94	18,79	20,26
5,60	2,85	4939	3415	8354	3061	15585	17646	0,83	0,07	2,49	8,42	8,42	11,38	1,02	0,99	19,58	21,05	
5,90	2,80	4951	3428	8380	3049	15572	17620	0,83	0,07	2,49	8,91	8,91	11,63	1,02	0,99	20,36	21,84	
6,10	2,80	4958	3441	8399	3042	15559	17601	0,83	0,07	2,49	9,26	9,26	11,83	1,02	0,99	20,89	22,37	

OTHER DIMENSIONS VA: 1,53 WN: 1,40 HV¹²⁾: 0,98 HV¹³⁾: 0,93 RB: 0,79 SB: 1,82 TB¹⁴⁾: 2,48

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle (trailing axle down).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.