


# Specification sheet

# LF 230

FA 4X2 Rigid, 19t Chassis/Body

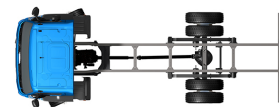

## ENGINES

- LF 230 PX-7 (167 kW / 227 hp)
- LF 260 PX-7 (189 kW / 257 hp)
- LF 290 PX-7 (212 kW / 287 hp)
- LF 310 PX-7 (227 kW / 308 hp)

## GVM<sup>1)</sup>

- 18000 kg
- Max. front 7500 kg
- Max. rear 11500 kg

## GCM<sup>2)</sup>

- 19000 kg

016F5603BAAA - 202345C - 18-08-2023

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Green tinted glass; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

### Optional

<b>02576</b> Extended Day Cab	<b>09984</b> Fog lights and cornering lights
<b>02106</b> Sleeper Cab	<b>07343</b> Kerb view window co-driver door
<b>01605</b> Cab suspension mechanical reinforced	<b>00915</b> Side no glass / rear single glass
<b>09983</b> Fog lights	<b>09101</b> Green tinted glass, heated

## AERODYNAMICS

### Optional

<b>09287</b> Side collars prepared	<b>07112</b> Side collars long (set)
------------------------------------	--------------------------------------

## COLOURS

; Head lamp panel and bumper: Stone Grey; Chassis colour grey.; No body panels.

### Optional

<b>06485</b> Head lamp panel and bumper: cab colour	<b>16153</b> Cab and chassis colours
---	--------------------------------------

## CAB INTERIOR

Right-hand drive (RHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

### Optional

<b>09271</b> Steering wheel, leather, colour black	<b>02213</b> Air conditioning
<b>03516</b> Pneumatically adjustable steering column	<b>03703</b> Auxiliary cab heater Air Top 2000
<b>00967</b> Seat belts red	<b>04246</b> Roof hatch, manual control
<b>16158</b> Seat types	<b>04258</b> Roof hatch, electric control
<b>04346</b> Lower bunk, normal level	

## COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C version G2V2; Adaptive Cruise Control with FCW and AEBS-3.

### Optional

<b>16155</b> Audio equipment, makes and types
---

## SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>06634</b> Immobiliser 5 minutes and alarm (SCM BV03-B2)
<b>01725</b> Reverse warning	<b>06635</b> Immobiliser 15 minutes and alarm (SCM BV03-B3)
<b>07414</b> Reverse warning with self-adjusting volume	
<b>06633</b> Immobiliser 5 minutes (SCM BV03-B1)	<b>16156</b> EC-ADR packages

## SUSPENSION AND AXLES

Front axle type 152N, 100 mm vertical offset. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 7.5 tonnes.; Single reduction driven rear axle type SR1132 with parabolic leaf suspension, including shock absorbers and stabiliser. Max. load 11.5 tonnes..

### Optional

<b>01800</b> Rear axle SR1344	<b>01778</b> Rear axle load 13.00 t
<b>01372</b> Rear springs air	

## WHEELS AND TYRES

Front axle(s): 295/80R22.5; Driven rear axle(s): 295/80R22.5; Wheel protection rings silvergrey.

### Optional

<b>06764</b> Wheel protection rings black	<b>16152</b> Tyre makes and types
<b>06766</b> Wheel protection rings chromium DAF	

## DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Manual gearbox, 6 speeds; Gearbox ratio 6.75-0.78; Rear axle ratio 5.13.

### Optional

<b>04393</b> Manual gearbox, 9 speeds	<b>02313</b> Gearbox direct drive
<b>07667</b> Automatic gearbox PowerLine, 8-speed	

## BRAKE SYSTEM

Exhaust brake.

## CHASSIS

Wheelbase 5.30 m / rear overhang 2.40 m; Side member height 270 mm; EAS unit right, discharge right rearward; Plastic fuel tank 200 l; Tank for AdBlue® 30 l, right-hand side chassis; Front underrun protection (FUP); Spray suppression.

### Optional

<b>03323</b> Rear light with LEDs
-----------------------------------

## DRAWBAR AND TRAILER EQUIPMENT

Closing member.

### Optional

<b>04638</b> Trailer coupling D= 8.5	<b>01948</b> D-value cross member D=10
<b>04661</b> D-value cross member D= 8.5	

## BODIES AND PREPARATIONS FOR BODYING

No BodyBuilder Module (BBM); Application connector on the cab front; Standard body attachment hole pattern.

### Optional

09952	BodyBuilder Module (BBM) full	02717	Aluminium kick strips, front and sides 228 mm
00126	Body attachment BAM 1, consoles type B	02712	Aluminium kick strips, front 228 mm
02357	Box body	02727	Galvanised kick strips, front and sides 200 mm
01890	Curtain sider body	02728	Plywood kick strips, front and sides 300 mm
01027	External body length 7300 mm	02738	Plywood kick strips, front 1200 mm, sides 300 mm
01028	External body length 7930 mm	04650	Rear wide lath shutter door
01048	External body length 8540 mm	04662	Rear double doors
04621	External body width 2540 mm	02726	Single, hinged side door at front left-hand side
01403	GRP faced plywood panels	02718	Side roller shutter door
00067	Contour markings	00312	Column tail lift 1.5 tonnes
02702	Standard body floor	00313	Tuck-under tail lift 1.5 tonnes
02698	Body floor with 3 mm aluminium tread plate		

## POWER TAKE-OFF (PTO)

### Optional

16148 PTO types and positions

## 24V POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

### Optional

01897 Alternator 100 A      08797 Batteries 2x175Ah

## GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related technical GCM equal to GVM.

### Optional

00064	Driveline related max GCM 22500 kg	00620	Driveline related max GCM 28000 kg
02658	Driveline related max GCM 26000 kg	03027	Driveline related max GCM 32000 kg class 3

## APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

### Optional

02270	Cold climate	04482	Air intake high behind cab
04767	Moisture separator, heated	04987	Radiator flyscreen

## SERVICE AND MAINTENANCE

Warranty Plus - 1 Year Vehicle & 3 Year Driveline - takes care of all warrantable repairs on the vehicle for one year and on the driveline for second and third years together with associated breakdown coverage.; DAF 2 year Preventive Maintenance Package - 320k.

## VEHICLE DELIVERY



Standard toolkit.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# LF 230

FA 4X2 Rigid, 19t Chassis/Body

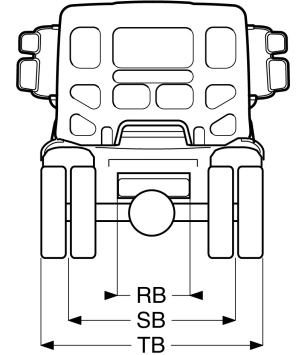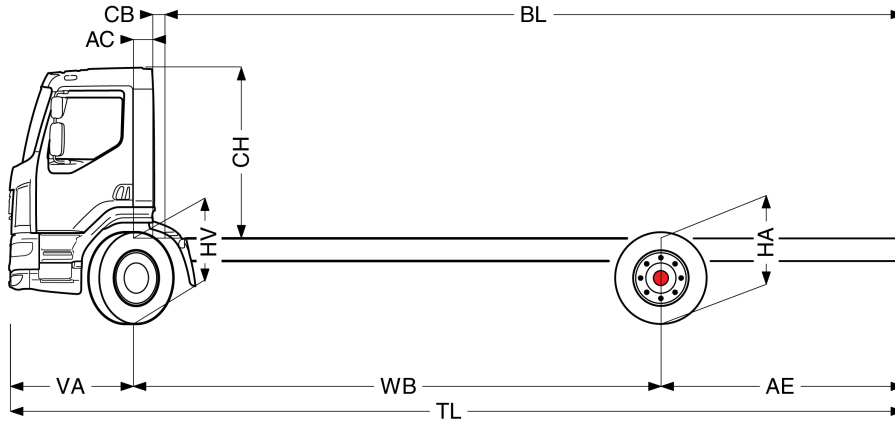

	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions									
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CB <sup>6)</sup>	CH <sup>7)</sup>	BL <sup>8)</sup>	BL	TL	HA <sup>9)</sup>	HA <sup>10)</sup>	TK <sup>11)</sup>	TW <sup>12)</sup>
DAY CAB	5,30	2,40	3383	1841	5224	4117	9659	12776	0,23	0,26	1,88	6,45	6,45	9,08	1,04	0,84	18,02	19,20
	5,85	2,68	3426	1915	5341	4074	9585	12659	0,23	0,26	1,88	7,24	7,24	9,90	1,04	0,84	19,53	20,73
	6,25	2,88	3437	1939	5376	4063	9561	12624	0,23	0,26	1,88	7,80	7,80	10,50	1,04	0,84	20,63	21,84
SLEEPER CAB	5,30	2,40	3517	1831	5348	3983	9669	12652	0,63	0,20	1,88	5,85	5,85	9,08	1,04	0,84	18,02	19,20
	5,85	2,68	3560	1906	5465	3940	9594	12535	0,63	0,20	1,88	6,64	6,64	9,90	1,04	0,84	19,53	20,73
	6,25	2,88	3570	1930	5501	3930	9570	12499	0,63	0,20	1,88	7,21	7,21	10,50	1,04	0,84	20,63	21,84

OTHER DIMENSIONS      VA: 1,38    HV<sup>13)</sup>: 1,00    HV<sup>14)</sup>: 0,92    RB: 0,79    SB: 1,82    TB<sup>15)</sup>: 2,45

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 200 litres of fuel, 30 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Cab height is measured from frame member to closed cabin roof hatch.
- 8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- 9) Unladen height at centre of driven axle(s).
- 10) Laden height at centre of driven axle(s).
- 11) TK = turning circle between kerbs.
- 12) TW = turning circle between walls.
- 13) Unladen height at centre of front axle(s).
- 14) Laden height at centre of front axle(s).
- 15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.