Specification sheet

XG 450

FAN 6X2 Rigid, Low Deck



ENGINES
New Generation XG 450 MX-11 (330 kW / 449 hp)
New Generation XG 430 MX-13 (315 kW / 428 hp)
New Generation XG 480 MX-13 (355 kW / 483 hp)
New Generation XG 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
26000 kg	44000 kg
Max. front 7500 kg	
Max. rear 18999 kg	

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

016F0329RAAA - 202217B - 14-01-2022

CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm.; Cab suspension mechanical; Front view mirror; Central door lock system, 2 keys, 2 RC units.

Ontional

01226	Cab suspension air	009
03358	External sun visor	
04355	Air horns, prepared	018
00847	Air horns, single set	066
09006	Air horns, double set	000
01043	LED head and cornering lights	032
03922	Fog lights front	018
		013

00949	LED Skylights; aux. LED
	lights on cab rf, prepared

891 Hazard beacons on cab front, prepared

Two hazard beacon 629 lights

232 Front windscreen with solar control foil

886 Laminated glass with solar control foil

1362 DAF Digital Vision System

01913 DAF Corner View

AERODYNAMICS

Optional

02502	Adj. roof air deflector;
	over 4 m (!)for XG cab

03403 Adjustable roof air deflector for XG cab 02952 Chassis hottom execution front: bottom plate aero

04150 Mattress with topper for

DAF Relax Bed

06970 Automatic Cab Climate

Control

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey...

CAB INTERIOR

Cab interior trim colour: Exclusive; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; Automatic Temperature Control and airco; Auxiliary cab heater (water).

Optional

	Steering wheel, leather	07748	Co-driver seat: Xtra Leather Air
	Cab interior decoration: Argenta	02298	Co-driver seat, swivel
02350	Cab interior decoration: Natura	00967	base Seat belts red
07733	Driver seat: Luxury Air	02823	Television, prepared
07736	Driver seat: Super Air	04070	Two drawers
07737	Driver seat: Xtra Leather	04050	Refrigerator and drawer
	Air	04069	Two refrigerators
02241	Driver seat, swivel base	02854	Xtra Comfort mattress for
03461			lower bunk
	table; fabric cover	02841	Foam mattress for
07741	Co-driver seat: Comfort Air		adjustable lower bunk
02701	Co-driver seat: cinema	01775	Xtra Comfort mattress
03/61	with alcantara cover		with topper for lower bunk
07743	Co-driver seat: Luxury Air	02858	Xtra Comfort mattress for
03849	Co-driver seat: cinema +		adjustable lower bunk
	table; alcantara cover	02860	Xtra Comfort mattress +
03848	Co-driver seat: cinema		topper for adj. lower bunk
	with leather cover	02380	Mattress for DAF Relax
07746	Co-driver seat: Super Air		Bed

03862 Co-driver seat: cinema +

table; leather cover

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEBS-3.

09681	Preparation for Maut	01915	DAF Infotainment
02828	DAF Infotainment		System: Luxury Plus
	System: Exclusive	06991	Predictive Cruise Control
02825	DAF Infotainment		

SAFETY AND SECURITY

System: Luxury

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners		Safety regulations EC ADR
01725	Reverse warning	07267	City turn assist prepared

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear axle SR1344; Trailing axle load 8.0t; No lifting device.

Optional

04588 Rear axle SR1347 08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/60R22.5; Driven rear axle(s): 315/60R22.5; Second driven rear or trailing axle: 315/60R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

06877	Disc wheels steel, black	02434	Wheels aluminium Alcoa
06879	Wheels aluminium Alcoa		Dura-Bright 32 mm
	Brushed 32 mm	16152	Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

07103 Automated gearbox, TraXon, 16 speeds

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS)...

Ontional

02715 ZF Intarder

CHASSIS

Wheelbase 4.60 m / rear overhang 2.75 m; Side member height 260 mm; Standard component location; Exhaust pipe horizontal, low; Tank for AdBlue® 45 I, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

07071 Spare wheel carrier right- 03323 Rear light with LEDs hand side

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection Ctype; Electric connection 24 V / 2x7 pins.



Optional

07033 Trailer coupling Ringfeder D=13.7

07034 Trailer coupling Ringfeder D=20.0

08026 Trailer coupling Rockinger D=13.0 08027 Trailer coupling Rockinger D=20.0

04659 Trailer cable EBS

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring 03225 Application connector flexible 02191 Front support for a DIN mounting plate, prepared

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 130 A, batteries 2x 210 Ah AGM..

Optional

08775 Alternator 150 A

06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 27500 kg; Driveline related max GCM 50000 kg class $3.\,$

Optional

03673 Driveline related max GCM 44000 kg class 2

APPLICATION CONDITIONS

Air intake front.

Optional

06614 Anti-dust blow-up shield

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

Optional


08311 Service interval extended



Go to DAF.com to configure your own perfect DAF.

XG 450

FAN 6X2 Rigid, Low Deck

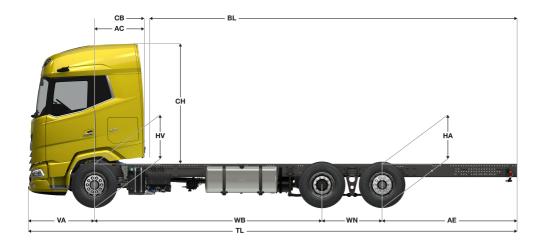



	Wheelbase - AE		eelbase - AE Unladen weight ⁴⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK 10)	TW ¹¹⁾
	4,60	2,75	5252	3529	8781	2248	15469	17219	1,16	0,07	2,83	6,50	6,79	10,28	0,88	0,91	15,56	16,98
AB	4,80	2,90	5260	3601	8861	2240	15398	17139	1,16	0,07	2,83	6,85	7,15	10,63	0,88	0,91	16,08	17,51
Ö	5,05	3,10	5252	3646	8898	2248	15353	17102	1,16	0,07	2,83	7,28	7,60	11,08	0,88	0,91	16,73	18,17
×	5,30	3,15	5257	3668	8925	2243	15331	17075	1,16	0,07	2,83	7,71	8,04	11,38	0,88	0,91	17,39	18,83

OTHER DIMENSIONS VA: 1,53 WN: 1,40 HV¹²): 0,89 HV¹³): 0,89 RB: 0,79 SB: 1,82 TB¹⁴): 2,48

- 1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 450 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

 1) Other As dispensions may be a weight for shown WP. Madify, not a verbage to the expensional part.

- vehicle weight.

 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

 6) CB is based on standard air intake and/or exhaust.

 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- 8) Unladen height at centre of driven axle (trailing axle down).
 9) Laden height at centre of driven axle(s).
 10) TK = turning circle between kerbs.
 11) TW = turning circle between walls.
 12) Unladen height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

