


Specification sheet

XD 300

FAR 6X2 Rigid, single mounted trailing axle



ENGINES
XD NewGen 300 MX-11 (220 kW / 299 hp)
XD NewGen 340 MX-11 (251 kW / 341 hp)
XD NewGen 370 MX-11 (270 kW / 367 hp)
XD NewGen 410 MX-11 (300 kW / 408 hp)
XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM ¹⁾	GCM ²⁾
26000 kg	38000 kg
Max. front 8000 kg	
Max. rear 19000 kg	

016F0121CAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	07201 Skylights
03353 Chassis front execution: protruding	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
01226 Cab suspension air	07343 Kerb view window co-driver door
04355 Air horns, prepared	01886 Laminated glass with solar control foil
00847 Air horns, single set	01355 Main mirrors
09006 Air horns, double set	01358 No DAF Digital Vision System
00330 LED head and fog lights	01912 No DAF Corner View
00346 LED head and cornering lights	06497 No rear view camera
00354 LED head, cornering and fog lights	03151 Rear view camera with prep for 2nd camera
02591 High Beam Assist	

AERODYNAMICS

Adj. roof air deflector for Day Cab; Adj. roof air deflector for Day Cab; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	04898 No roof air deflector
07340 Adj. roof air deflector for Sleeper Cab	04906 Side collars, one side hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	03074 Side collars, both sides hinged
01818 Adj. roof air deflector long low Sleeper High Cab	16154 Roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	07746 Co-driver seat: Super Air
02355 Steering wheel, leather	03862 Co-driver seat: cinema + table; leather cover
02353 Cab interior decoration: Argenta	07748 Co-driver seat: Xtra Leather Air
02350 Cab interior decoration: Natura	02117 Third seat
07733 Driver seat: Luxury Air	02837 Dashboard table
07736 Driver seat: Super Air	03948 Single drawer
07737 Driver seat: Xtra Leather Air	03954 Refrigerator
03461 Co-driver seat: cinema + table; fabric cover	02838 Foam mattress for lower bunk
07741 Co-driver seat: Comfort Air	02854 Xtra Comfort mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	01775 Xtra Comfort mattress with topper for lower bunk
07743 Co-driver seat: Luxury Air	04840 Disposable roof hatch prepared for parking cooler
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control
03848 Co-driver seat: cinema with leather cover	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02567 No Traffic Sign Assist	16156 EC-ADR packages
02569 No Driver State Monitoring	01929 No Drive-off Assist
03628 DAF drowsiness & distraction detection	01952 No DAF Side/Turn Assist
06410 Safe Load Pass preparation	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1344; Rear springs air; Rear axle load 12.00 t; Rear: 19.50 t, air suspension, SR1344; Trailing axle load 7.5t; Lifting device.

Optional

- 04813** Front: 8.00 t, parabolic, 165N
02509 Front: 8.00 t, parabolic, 167N
02426 Front: 9.00 t, parabolic, 183N
00300 Front: 9.00 t, parabolic, 187N
07114 Front: 10.00 t, parabolic, 203L
02460 Front: 8.00 t, air suspension, 161N
04647 Front springs air
04057 Rear axle HR1356
04588 Rear axle SR1347
03040 Rear axle load 11.50 t
08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

- 08101** No tyre pressure monitoring
16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated gearbox type TraXon 12TX1810, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.08; No differential lock.

Optional

- 02843** Mechanical differential lock

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with disc brakes.

Optional

- 02366** MX Engine Brake
02281 ZF Intarder
02304 MX Engine Brake and ZF Intarder
02715 ZF Intarder
01572 Park brake control electro-pneumatic
01497 Park brake control pneumatic with spoken warning
04901 Spring brake cylinders on the first front axle
04375 Park brake electro-pneumatic
03969 Park brake assist
00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 3.80 m / rear overhang 2.05 m; Side member 260/7.0 mm, front reinforcement; Side member height 260 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis.

Optional

- 02601** Side member height 310 mm
16157 Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

- 02729** Application connector Plug & Play
09421 Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

Optional

- 00209** Driveline related max GCM 40000 kg class 3
03673 Driveline related max GCM 44000 kg class 2
03675 Driveline related max GCM 50000 kg class 3
00939 Driveline related max GCM 56000 kg class 2
00818 Driveline related max GCM 60000 kg class 3

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

- 02260** Extra cab insulation
03648 Cyclonic air intake high

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY



Optional

- 02008** No toolkit
02019 Standard toolkit
06492 Toolkit Türkiye
06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

XD 300

FAR 6X2 Rigid, single mounted trailing axle

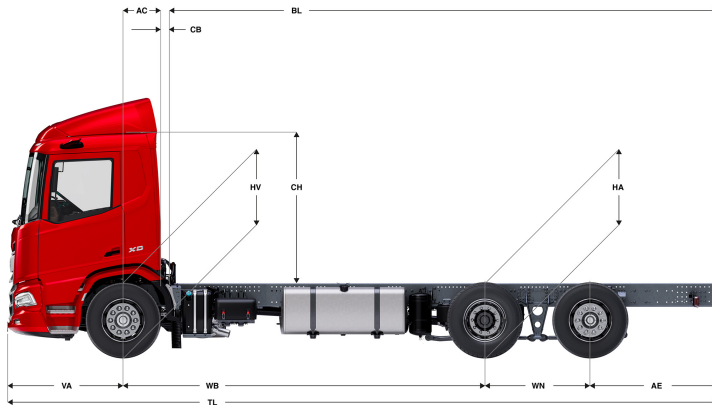

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
DAY CAB	3,80	2,05	4862	2993	7856	3138	16007	18144	0,50	0,07	2,82	6,11	6,11	8,78	0,97	0,94	14,93	16,34
	4,20	2,40	4846	3071	7918	3154	15929	18082	0,50	0,07	2,82	6,77	6,77	9,53	0,97	0,94	15,97	17,40
	4,40	2,55	4848	3127	7975	3152	15873	18025	0,50	0,07	2,82	7,09	7,09	9,88	0,97	0,94	16,49	17,92
	4,60	2,55	4905	3244	8149	3095	15756	17851	0,50	0,07	2,82	7,44	7,44	10,08	0,97	0,94	17,01	18,45
	4,80	2,70	4885	3273	8158	3115	15727	17842	0,50	0,07	2,82	7,75	7,75	10,43	0,97	0,94	17,53	18,98
	5,05	2,90	4874	3317	8191	3126	15683	17809	0,50	0,07	2,82	8,17	8,17	10,88	0,97	0,94	18,19	19,64
	5,30	2,90	4881	3334	8215	3119	15666	17785	0,50	0,07	2,82	8,59	8,59	11,13	0,97	0,94	18,84	20,30
	5,60	2,85	4926	3427	8352	3074	15573	17648	0,50	0,07	2,77	9,10	9,10	11,38	1,02	0,99	19,63	21,10
	5,90	2,80	4938	3439	8377	3062	15561	17623	0,50	0,07	2,77	9,60	9,60	11,63	1,02	0,99	20,41	21,89
	6,10	2,80	4945	3452	8396	3055	15548	17604	0,50	0,07	2,77	9,93	9,93	11,83	1,02	0,99	20,94	22,42
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SLEEPER CAB	3,80	2,05	4998	2988	7986	3002	16012	18014	0,83	0,07	2,82	5,50	5,50	8,78	0,97	0,94	14,93	16,34
	4,20	2,40	4982	3066	8048	3018	15934	17952	0,83	0,07	2,82	6,17	6,17	9,53	0,97	0,94	15,97	17,40
	4,40	2,55	4983	3123	8105	3017	15877	17895	0,83	0,07	2,82	6,49	6,49	9,88	0,97	0,94	16,49	17,92
	4,60	2,55	5040	3239	8279	2960	15761	17721	0,83	0,07	2,82	6,85	6,85	10,08	0,97	0,94	17,01	18,45
	4,80	2,70	5020	3268	8288	2980	15732	17712	0,83	0,07	2,82	7,18	7,18	10,43	0,97	0,94	17,53	18,98
	5,05	2,90	5008	3313	8321	2992	15687	17679	0,83	0,07	2,82	7,58	7,58	10,88	0,97	0,94	18,19	19,64
	5,30	2,90	5015	3331	8345	2985	15669	17655	0,83	0,07	2,82	7,99	7,99	11,13	0,97	0,94	18,84	20,30
	5,60	2,85	5060	3423	8483	2940	15577	17517	0,83	0,07	2,77	8,51	8,51	11,38	1,02	0,99	19,63	21,10
	5,90	2,80	5072	3436	8508	2928	15564	17492	0,83	0,07	2,77	9,03	9,03	11,63	1,02	0,99	20,41	21,89
	6,10	2,80	5078	3448	8527	2922	15552	17473	0,83	0,07	2,77	9,35	9,35	11,83	1,02	0,99	20,94	22,42
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SLEEPER HIGH CAB	3,80	2,05	4969	2984	7952	3031	16016	18048	0,83	0,07	2,68	5,49	5,49	8,78	0,97	0,94	14,93	16,34
	4,20	2,40	4952	3062	8014	3048	15938	17986	0,83	0,07	2,68	6,15	6,15	9,53	0,97	0,94	15,97	17,40
	4,40	2,55	4953	3118	8071	3047	15882	17929	0,83	0,07	2,68	6,49	6,49	9,88	0,97	0,94	16,49	17,92
	4,60	2,55	5011	3235	8246	2989	15765	17754	0,83	0,07	2,68	6,83	6,83	10,08	0,97	0,94	17,01	18,45
	4,80	2,70	4990	3264	8254	3010	15736	17746	0,83	0,07	2,68	7,16	7,16	10,43	0,97	0,94	17,53	18,98
	5,05	2,90	4979	3308	8287	3021	15692	17713	0,83	0,07	2,68	7,56	7,56	10,88	0,97	0,94	18,19	19,64
	5,30	2,90	4986	3326	8312	3014	15674	17688	0,83	0,07	2,68	7,98	7,98	11,13	0,97	0,94	18,84	20,30
	5,60	2,85	5031	3418	8449	2969	15582	17551	0,83	0,07	2,63	8,49	8,49	11,38	1,02	0,99	19,63	21,10
	5,90	2,80	5043	3431	8474	2957	15569	17526	0,83	0,07	2,63	9,01	9,01	11,63	1,02	0,99	20,41	21,89
	6,10	2,80	5049	3444	8493	2951	15556	17507	0,83	0,07	2,63	9,35	9,35	11,83	1,02	0,99	20,94	22,42

OTHER DIMENSIONS	VA: 1,53	WN: 1,40	HV ¹²⁾ : 0,97	HV ¹³⁾ : 0,93	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

- 8) Unladen height at centre of driven axle (trailing axle down).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.