


Specification sheet

XD 300

FAN 6X2 Rigid

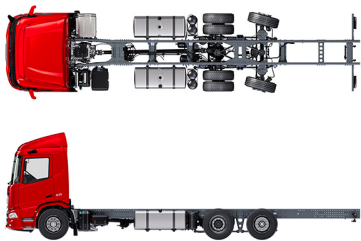

ENGINES

- XD NewGen 300 MX-11 (220 kW / 299 hp)
- XD NewGen 340 MX-11 (251 kW / 341 hp)
- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 26000 kg
-
- Max. front 8000 kg
- Max. rear 19000 kg

GCM²⁾

38000 kg

016F0121NAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	07201 Skylights
03353 Chassis front execution: protruding	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
01226 Cab suspension air	07343 Kerb view window co-driver door
04355 Air horns, prepared	01886 Laminated glass with solar control foil
00847 Air horns, single set	01355 Main mirrors
09006 Air horns, double set	01358 No DAF Digital Vision System
00330 LED head and fog lights	01912 No DAF Corner View
00346 LED head and cornering lights	06497 No rear view camera
00354 LED head, cornering and fog lights	03151 Rear view camera with prep for 2nd camera
02591 High Beam Assist	

AERODYNAMICS

Adj. roof air deflector for Day Cab; Adj. roof air deflector for Day Cab; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	04898 No roof air deflector
07340 Adj. roof air deflector for Sleeper Cab	04906 Side collars, one side hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	03074 Side collars, both sides hinged
01818 Adj. roof air deflector long low Sleeper High Cab	16154 Roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	07746 Co-driver seat: Super Air
02355 Steering wheel, leather	03862 Co-driver seat: cinema + table; leather cover
02353 Cab interior decoration: Argenta	07748 Co-driver seat: Xtra Leather Air
02350 Cab interior decoration: Natura	02117 Third seat
07733 Driver seat: Luxury Air	02837 Dashboard table
07736 Driver seat: Super Air	03948 Single drawer
07737 Driver seat: Xtra Leather Air	03954 Refrigerator
03461 Co-driver seat: cinema + table; fabric cover	02838 Foam mattress for lower bunk
07741 Co-driver seat: Comfort Air	02854 Xtra Comfort mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	01775 Xtra Comfort mattress with topper for lower bunk
07743 Co-driver seat: Luxury Air	04840 Disposable roof hatch prepared for parking cooler
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control
03848 Co-driver seat: cinema with leather cover	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	06990 No Predictive Cruise Control

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02567 No Traffic Sign Assist	16156 EC-ADR packages
02569 No Driver State Monitoring	01929 No Drive-off Assist
03628 DAF drowsiness & distraction detection	01952 No DAF Side/Turn Assist
06410 Safe Load Pass preparation	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1344; Rear springs air; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

Optional

- 04813** Front: 8.00 t, parabolic, 165N
02509 Front: 8.00 t, parabolic, 167N
02426 Front: 9.00 t, parabolic, 183N
00300 Front: 9.00 t, parabolic, 187N
07114 Front: 10.00 t, parabolic, 203L
02460 Front: 8.00 t, air suspension, 161N
04647 Front springs air
04057 Rear axle HR1356
04588 Rear axle SR1347
08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

- 08101** No tyre pressure monitoring
16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated gearbox type TraXon 12TX1810, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.08; No differential lock.

Optional

- 09889** Automatic gearbox, 6 speeds
02843 Mechanical differential lock

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with disc brakes.

Optional

- 02366** MX Engine Brake
02281 ZF Intarder
02304 MX Engine Brake and ZF Intarder
02715 ZF Intarder
01572 Park brake control electro-pneumatic
01497 Park brake control pneumatic with spoken warning
04901 Spring brake cylinders on the first front axle
04375 Park brake electro-pneumatic
03969 Park brake assist
00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 3.80 m / rear overhang 2.05 m; Side member 260/7.0 mm, front reinforcement; Side member height 260 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis.

Optional

- 02601** Side member height 310 mm
16157 Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

- 02729** Application connector Plug & Play
09421 Additional spare wiring
02950 Application connector for hydraulic platform
09240 Application connector for refuse coll. (EN1501-1)

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

Optional

- 04330** Driveline related max GCM 27000 kg class 2
00710 Driveline related max GCM 28000 kg class 3
00209 Driveline related max GCM 40000 kg class 3
03673 Driveline related max GCM 44000 kg class 2
03675 Driveline related max GCM 50000 kg class 3
00939 Driveline related max GCM 56000 kg class 2
00818 Driveline related max GCM 60000 kg class 3

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

- 08400** Silent mode
02260 Extra cab insulation
03648 Cyclonic air intake high

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY



Optional

- 02008** No toolkit
02019 Standard toolkit
06492 Toolkit Türkiye
06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

XD 300

FAN 6X2 Rigid

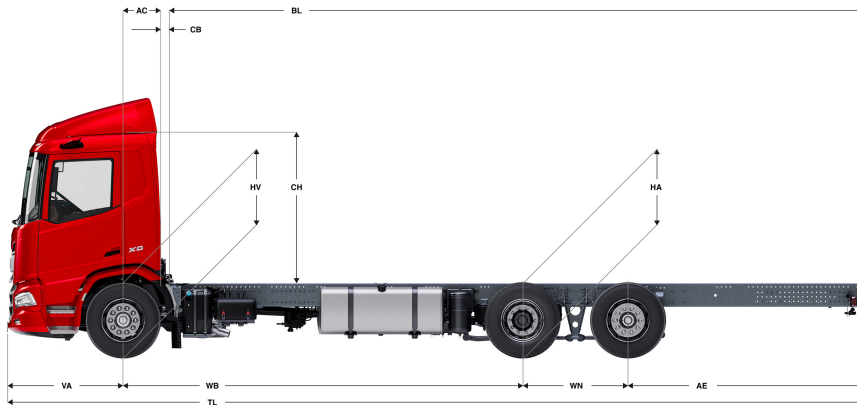

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
DAY CAB	3,80	2,05	4838	3007	7845	3162	15993	18155	0,50	0,07	2,82	6,10	6,10	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	4881	3197	8078	3119	15803	17922	0,50	0,25	2,77	6,08	6,08	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4833	3101	7933	3167	15899	18067	0,50	0,07	2,82	6,75	6,75	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4827	3138	7964	3173	15862	18036	0,50	0,07	2,82	7,09	7,09	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	4884	3255	8139	3116	15745	17861	0,50	0,07	2,82	7,43	7,43	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	4864	3283	8147	3136	15717	17853	0,50	0,07	2,82	7,75	7,75	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4856	3329	8184	3144	15671	17816	0,50	0,07	2,82	8,16	8,16	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4832	3345	8177	3168	15655	17823	0,50	0,07	2,82	8,56	8,56	11,38	0,97	0,94	17,40	18,84
	5,60	3,15	4810	3303	8113	3190	15697	17887	0,50	0,07	2,77	9,05	9,05	11,68	1,02	0,99	18,18	19,64
	6,10	2,90	4925	3490	8414	3075	15510	17586	0,50	0,07	2,77	9,92	9,92	11,93	1,02	1,00	19,49	20,96
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SLEEPER CAB	3,80	2,05	4974	3002	7976	3026	15998	18024	0,83	0,07	2,82	5,49	5,49	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	5023	3192	8215	2977	15808	17785	0,83	0,25	2,77	5,48	5,48	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4969	3096	8065	3031	15904	17935	0,83	0,07	2,82	6,15	6,15	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4962	3134	8096	3038	15866	17904	0,83	0,07	2,82	6,49	6,49	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	5020	3251	8270	2980	15749	17730	0,83	0,07	2,82	6,83	6,83	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	5000	3279	8279	3000	15721	17721	0,83	0,07	2,82	7,16	7,16	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4991	3325	8316	3009	15675	17684	0,83	0,07	2,82	7,56	7,56	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4967	3341	8309	3033	15659	17691	0,83	0,07	2,82	7,97	7,97	11,38	0,97	0,94	17,40	18,84
	5,60	3,15	4945	3300	8245	3055	15700	17755	0,83	0,07	2,77	8,46	8,46	11,68	1,02	0,99	18,18	19,64
	6,10	2,90	5059	3487	8546	2941	15513	17454	0,83	0,07	2,77	9,34	9,34	11,93	1,02	0,99	19,49	20,96
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SLEEPER HIGH CAB	3,80	2,05	4945	2998	7943	3055	16002	18057	0,83	0,07	2,68	5,48	5,48	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	4993	3188	8182	3007	15812	17818	0,83	0,25	2,63	5,46	5,46	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4939	3092	8031	3061	15908	17969	0,83	0,07	2,68	6,14	6,14	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4933	3129	8062	3067	15871	17938	0,83	0,07	2,68	6,47	6,47	9,88	0,97	0,94	15,05	16,46
	4,60	2,55	4990	3246	8237	3010	15754	17763	0,83	0,07	2,68	6,82	6,82	10,08	0,97	0,94	15,57	16,99
	4,80	2,70	4971	3274	8245	3029	15726	17755	0,83	0,07	2,68	7,14	7,14	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4962	3321	8282	3038	15679	17718	0,83	0,07	2,68	7,54	7,54	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4938	3337	8275	3062	15663	17725	0,83	0,07	2,68	7,96	7,96	11,38	0,97	0,94	17,40	18,84
	5,60	3,15	4916	3295	8211	3084	15705	17789	0,83	0,07	2,63	8,44	8,44	11,68	1,02	0,99	18,18	19,64
	6,10	2,90	5030	3482	8512	2970	15518	17488	0,83	0,07	2,63	9,32	9,32	11,93	1,02	0,99	19,49	20,96

OTHER DIMENSIONS	VA: 1,53	WN: 1,40	HV ¹²⁾ : 0,97	HV ¹³⁾ : 0,93	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle (trailing axle down).
9) Laden height at centre of driven axle(s).
10) TK = turning circle between kerbs.
11) TW = turning circle between walls.
12) Unladen height at centre of front axle(s).
13) Laden height at centre of front axle(s).
14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.