


Specification sheet

XD 370

FAN 6X2 Rigid, Low Deck

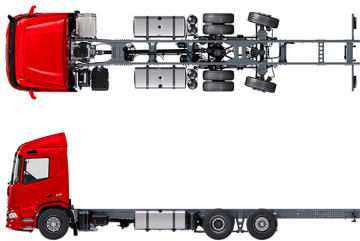

ENGINES

- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 26000 kg
-
- Max. front 7500 kg
- Max. rear 19000 kg

GCM²⁾

- 38000 kg
-
-
-

016F0121RAAA - 202545A - 15-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02952 Chassis front execution: bottom plate aero	06629 Two hazard beacon lights
03353 Chassis front execution: protruding	07201 Skylights
07586 Chassis front execution: robust	03232 Front windscreen with solar control foil
01226 Cab suspension air	03317 Rear window: double glass
04355 Air horns, prepared	07343 Kerb view window co-driver door
00847 Air horns, single set	01886 Laminated glass with solar control foil
09006 Air horns, double set	01355 Main mirrors
00330 LED head and fog lights	01358 No DAF Digital Vision System
00346 LED head and cornering lights	01912 No DAF Corner View
00354 LED head, cornering and fog lights	06497 No rear view camera
02591 High Beam Assist	03151 Rear view camera with prep for 2nd camera

AERODYNAMICS

Adj. roof air deflector for Day Cab; Adj. roof air deflector for Day Cab; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	04898 No roof air deflector
07340 Adj. roof air deflector for Sleeper Cab	04906 Side collars, one side hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	03074 Side collars, both sides hinged
01818 Adj. roof air deflector long low Sleeper High Cab	16154 Roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	07746 Co-driver seat: Super Air
02355 Steering wheel, leather	03862 Co-driver seat: cinema + table; leather cover
02353 Cab interior decoration: Argenta	07748 Co-driver seat: Xtra Leather Air
02350 Cab interior decoration: Natura	02117 Third seat
07733 Driver seat: Luxury Air	02837 Dashboard table
07736 Driver seat: Super Air	03948 Single drawer
07737 Driver seat: Xtra Leather Air	03954 Refrigerator
03461 Co-driver seat: cinema + table; fabric cover	02838 Foam mattress for lower bunk
07741 Co-driver seat: Comfort Air	02854 Xtra Comfort mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	01775 Xtra Comfort mattress with topper for lower bunk
07743 Co-driver seat: Luxury Air	04840 Disposable roof hatch prepared for parking cooler
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control
03848 Co-driver seat: cinema with leather cover	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02567 No Traffic Sign Assist	16156 EC-ADR packages
02569 No Driver State Monitoring	01929 No Drive-off Assist
03628 DAF drowsiness & distraction detection	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, air suspension, 161N; Front springs air; Rear axle SR1344; Rear springs air; Rear axle load 11.50 t; Rear: 19.50 t, air suspension, SR1344; Trailing axle load 8.0t; No lifting device.

Optional

08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/60R22.5; Driven rear axle(s): 315/60R22.5; Second driven rear or trailing axle: 315/60R22.5; Goodyear; Tyre pressure monitoring.

Optional

08101 No tyre pressure monitoring

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1950 Nm at 900-1125 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated direct drive gearbox TraXon 12TX2010, ratio 16.69-1.00, 12 speeds.; Rear axle ratio 2.21; No differential lock.

Optional

02843 Mechanical differential lock

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with disc brakes.

Optional

02366 MX Engine Brake	01572 Park brake control electro-pneumatic
02281 ZF Intarder	
02304 MX Engine Brake and ZF Intarder	01497 Park brake control pneumatic with spoken warning
02715 ZF Intarder	04375 Park brake electro-pneumatic
	03969 Park brake assist

CHASSIS

Wheelbase 4.60 m / rear overhang 2.75 m; Side member 260/7.0 mm, front/rear reinforcement; Side member height 260 mm; 450 l alu fuel tank LH, height 505 mm; Tank for AdBlue® 45 l, left-hand side chassis.

Optional

16157 Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

09421 Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

Optional

00209 Driveline related max GCM 40000 kg class 3	03675 Driveline related max GCM 50000 kg class 3
03673 Driveline related max GCM 44000 kg class 2	

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

08400 Silent mode

03648 Cyclonic air intake high

02260 Extra cab insulation

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended

VEHICLE DELIVERY

Optional

02008 No toolkit



06492 Toolkit Türkiye

02019 Standard toolkit

06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

FAN 6X2 Rigid, Low Deck

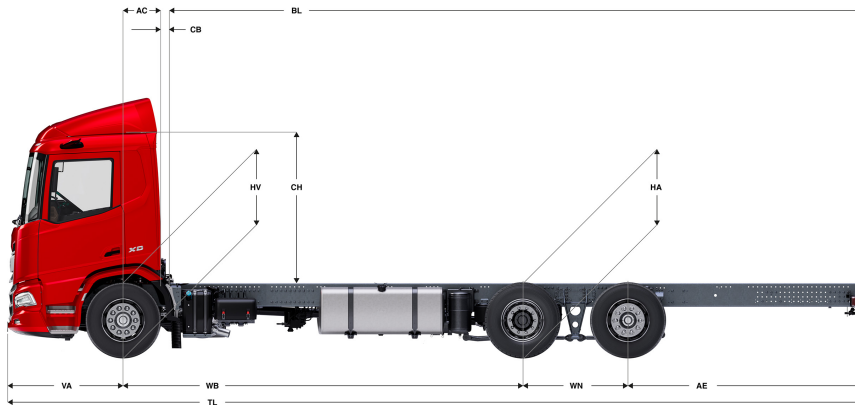

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,60	2,75	5229	3307	8536	2271	15693	17464	0,50	0,07	2,82	7,75	7,75	10,28	0,89	0,89	15,56	16,99
	4,80	2,90	5237	3379	8616	2263	15621	17384	0,50	0,07	2,82	8,09	8,09	10,63	0,89	0,89	16,08	17,51
	5,05	3,10	5228	3425	8652	2272	15575	17348	0,50	0,07	2,82	8,50	8,50	11,08	0,89	0,89	16,73	18,17
	5,30	3,15	5231	3449	8680	2269	15551	17320	0,50	0,07	2,82	8,94	8,94	11,38	0,89	0,89	17,39	18,84
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,60	2,75	5367	3302	8669	2133	15698	17331	0,83	0,07	2,82	7,17	7,17	10,28	0,89	0,89	15,56	16,99
	4,80	2,90	5375	3374	8749	2125	15626	17251	0,83	0,07	2,82	7,50	7,50	10,63	0,89	0,89	16,08	17,51
	5,05	3,10	5366	3420	8786	2134	15580	17214	0,83	0,07	2,82	7,93	7,93	11,08	0,89	0,89	16,73	18,17
	5,30	3,15	5369	3444	8813	2131	15556	17187	0,83	0,07	2,82	8,37	8,37	11,38	0,89	0,89	17,39	18,84
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,60	2,75	5338	3298	8636	2162	15702	17364	0,83	0,07	2,68	7,15	7,15	10,28	0,89	0,89	15,56	16,99
	4,80	2,90	5345	3370	8716	2155	15630	17284	0,83	0,07	2,68	7,49	7,49	10,63	0,89	0,89	16,08	17,51
	5,05	3,10	5336	3416	8752	2164	15584	17248	0,83	0,07	2,68	7,91	7,91	11,08	0,89	0,89	16,73	18,17
	5,30	3,15	5340	3440	8780	2160	15560	17220	0,83	0,07	2,68	8,35	8,35	11,38	0,89	0,89	17,39	18,84

OTHER DIMENSIONS	VA: 1,53	WN: 1,40	HV ⁽¹²⁾ : 0,89	HV ⁽¹³⁾ : 0,88	RB: 0,79	SB: 1,82	TB ⁽¹⁴⁾ : 2,48
------------------	----------	----------	---------------------------	---------------------------	----------	----------	---------------------------

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 450 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

- 8) Unladen height at centre of driven axle (trailing axle down).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.