


Specification sheet

XD 300

FAT 6X4 Rigid



ENGINES

- XD NewGen 300 MX-11 (220 kW / 299 hp)
- XD NewGen 340 MX-11 (251 kW / 341 hp)
- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 26000 kg
-
- Max. front 8000 kg
- Max. rear 19000 kg

GCM²⁾

32000 kg

016F0141AAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	
02889 Chassis front execution: no bottom plate	01891 Hazard beacons on cab front, prepared
02952 Chassis front execution: bottom plate aero	06629 Two hazard beacon lights
03353 Chassis front execution: protruding	07201 Skylights
07586 Chassis front execution: robust	03232 Front windscreen with solar control foil
01226 Cab suspension air	03317 Rear window: double glass
04355 Air horns, prepared	07343 Kerb view window co-driver door
00847 Air horns, single set	01886 Laminated glass with solar control foil
09006 Air horns, double set	01354 No main mirrors
00330 LED head and fog lights	01362 DAF Digital Vision System
00346 LED head and cornering lights	01912 No DAF Corner View
00354 LED head, cornering and fog lights	06497 No rear view camera
02591 High Beam Assist	03151 Rear view camera with prep for 2nd camera

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01818 Adj. roof air deflector long low Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16154 Roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; No Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	06991 Predictive Cruise Control

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02567 No Traffic Sign Assist	16156 EC-ADR packages
02569 No Driver State Monitoring	01929 No Drive-off Assist
03628 DAF drowsiness & distraction detection	01952 No DAF Side/Turn Assist
06410 Safe Load Pass preparation	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1132T; Rear springs trapezium; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

Optional

04818 Front: 7.50 t, parabolic, 163N	07494 Rear axle HR1670T
04812 Front: 7.50 t, parabolic, 165N	02788 Rear axle SR1360T
04813 Front: 8.00 t, parabolic, 165N	01372 Rear springs air
02509 Front: 8.00 t, parabolic, 167N	04549 Rear axle load 10.50+ 10.50 t
02426 Front: 9.00 t, parabolic, 183N	04563 Rear axle load 13.00+ 13.00 t
00300 Front: 9.00 t, parabolic, 187N	08191 Axle load monitoring
07114 Front: 10.00 t, parabolic, 203L	

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

08101 No tyre pressure monitoring	16152 Tyre makes and types
--	-----------------------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated gearbox type TraXon 12TX1810, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.73; Mechanical differential lock.

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with drum brakes.

Optional

02366 MX Engine Brake	01497 Park brake control pneumatic with spoken warning
02281 ZF Intarder	
02304 MX Engine Brake and ZF Intarder	06032 Spring brake cylinder on rear tandem axle 1 and 2
02715 ZF Intarder	04375 Park brake electro-pneumatic
01572 Park brake control electro-pneumatic	03969 Park brake assist
	06127 Driven rear axle with disc brakes

CHASSIS

Wheelbase 4.55 m / rear overhang 1.65 m; Side member 310/6.0 mm, front reinforcement; Side member height 310 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis.

Optional

16157 Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

02729 Application connector Plug & Play	09240 Application connector for refuse coll. (EN1501-1)
09421 Additional spare wiring	

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 26000 kg; Driveline related max GCM 32000 kg class 2.

Optional

03027 Driveline related max GCM 32000 kg class 3	03675 Driveline related max GCM 50000 kg class 3
01207 Driveline related max GCM 35500 kg class 2	00778 Driveline related max GCM 58000 kg class 2
01208 Driveline related max GCM 35500 kg class 3	07279 Driveline related max GCM 60000 kg class 2
00200 Driveline related max GCM 38000 kg class 2	00818 Driveline related max GCM 60000 kg class 3
00209 Driveline related max GCM 40000 kg class 3	00157 Driveline related max GCM 61000 kg class 2
03673 Driveline related max GCM 44000 kg class 2	

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

02260 Extra cab insulation	03648 Cyclonic air intake high
-----------------------------------	---------------------------------------

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended
--



VEHICLE DELIVERY

Optional

02008 No toolkit	06492 Toolkit Türkiye
02019 Standard toolkit	06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

FAT 6X4 Rigid

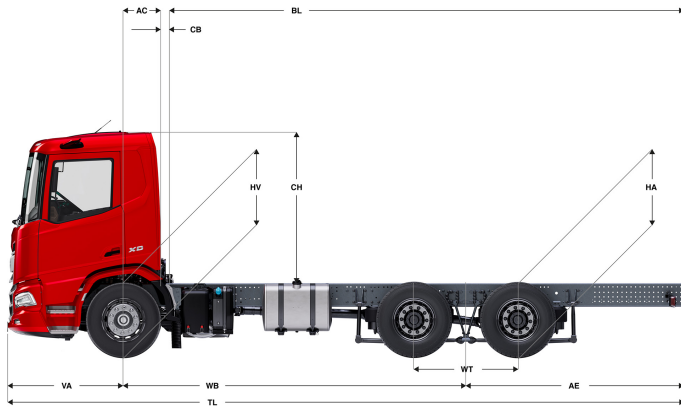

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,65	4932	3996	8928	3068	15004	17072	0,50	0,07	2,01	5,56	5,56	7,23	1,13	1,09	14,14	15,54
	4,55	1,65	4852	3620	8472	3148	15380	17528	0,50	0,07	2,01	6,33	6,42	7,73	1,15	1,10	15,44	16,86
	5,00	1,65	4984	4104	9088	3016	14896	16912	0,50	0,07	2,01	7,15	7,15	8,18	1,13	1,09	16,61	18,05
	5,55	3,20	5014	4552	9566	2986	14448	16434	0,50	0,07	2,01	8,02	8,02	10,28	1,13	1,08	18,05	19,50
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,65	5047	3989	9036	2953	15011	16964	0,83	0,07	2,01	4,94	4,94	7,23	1,13	1,08	14,14	15,54
	4,55	1,65	4967	3613	8580	3033	15387	17420	0,83	0,07	2,01	5,72	5,81	7,73	1,15	1,09	15,44	16,86
	5,00	1,65	5097	4099	9196	2903	14901	16804	0,83	0,07	2,01	6,54	6,54	8,18	1,13	1,09	16,61	18,05
	5,55	3,20	5127	4547	9674	2873	14453	16326	0,83	0,07	2,01	7,42	7,42	10,28	1,13	1,08	18,05	19,50
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,65	5078	3987	9066	2922	15013	16934	0,83	0,07	2,49	4,96	4,96	7,23	1,13	1,08	14,14	15,54
	4,55	1,65	4998	3612	8610	3002	15388	17390	0,83	0,07	2,49	5,73	5,83	7,73	1,15	1,09	15,44	16,86
	5,00	1,65	5128	4098	9226	2872	14902	16774	0,83	0,07	2,49	6,55	6,55	8,18	1,13	1,09	16,61	18,05
	5,55	3,20	5158	4546	9704	2842	14454	16296	0,83	0,07	2,49	7,43	7,43	10,28	1,13	1,08	18,05	19,50

OTHER DIMENSIONS VA: 1,53 WT: 1,40 HV⁽¹²⁾: 1,01 HV⁽¹³⁾: 0,92 RB: 0,79 SB: 1,82 TB⁽¹⁴⁾: 2,48

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.