


Specification sheet

XD 370

FAD 8X4 Rigid



ENGINES

- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 32000 kg
-
- Max. front 16000 kg
- Max. rear 19000 kg

GCM²⁾

- 35500 kg
-
-
-

016F0171AAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01891 Hazard beacons on cab front, prepared
06244 Sleeper High Cab	06629 Two hazard beacon lights
03353 Chassis front execution: protruding	07201 Skylights
07586 Chassis front execution: robust	03232 Front windscreen with solar control foil
01226 Cab suspension air	03317 Rear window: double glass
04355 Air horns, prepared	07343 Kerb view window co-driver door
00847 Air horns, single set	01886 Laminated glass with solar control foil
09006 Air horns, double set	01354 No main mirrors
00330 LED head and fog lights	01362 DAF Digital Vision System
00346 LED head and cornering lights	01912 No DAF Corner View
00354 LED head, cornering and fog lights	06497 No rear view camera
02591 High Beam Assist	03151 Rear view camera with prep for 2nd camera
01925 Two LED work lamps for cab rear wall	

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16154 Roof air deflectors, types and settings
01818 Adj. roof air deflector long low Sleeper High Cab	

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16153 Cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control (ACC) with FCW; No Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	01219 Speakers: Exclusive
07021 PACCAR Connect with navigation and tablet software	09908 Cruise control
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	08023 Adaptive Cruise Control with FCW and AEBS-3
03684 Infotainment including DAF Truck Navigation	06991 Predictive Cruise Control

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09491 Vehicle Stability Control (VSC)
02567 No Traffic Sign Assist	00795 Safety regulations EC ADR
02569 No Driver State Monitoring	16156 EC-ADR packages
03628 DAF drowsiness & distraction detection	01929 No Drive-off Assist
09991 No Lane Departure Warning System	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 2x 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1132T; Rear springs trapezium; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

Optional

04312 Front: 2x 7.10 t, parabolic, 163N	02788 Rear axle SR1360T
04959 Front: 2x 7.50 t, parabolic, 163N	01372 Rear springs air
02345 Front: 2x 8.00 t, parabolic, 165N	04549 Rear axle load 10.50+ 10.50 t
04155 Front: 2x 9.00 t, parabolic, 183N	04563 Rear axle load 13.00+ 13.00 t
07494 Rear axle HR1670T	08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

08101 No tyre pressure monitoring	16152 Tyre makes and types
--	-----------------------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1950 Nm at 900-1125 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated overdrive gearbox TraXon 12TX2610, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.73; Mechanical differential lock.

BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with drum brakes.

Optional

02287 Exhaust brake	01497 Park brake control pneumatic with spoken warning
02281 ZF Intarder	06032 Spring brake cylinder on rear tandem axle 1 and 2
02304 MX Engine Brake and ZF Intarder	04375 Park brake electro-pneumatic
02715 ZF Intarder	03969 Park brake assist
01572 Park brake control electro-pneumatic	06127 Driven rear axle with disc brakes

CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member 310/6.0 mm, full length reinforcement; Side member height 310 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box.

Optional

16157 Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

02729 Application connector Plug & Play	09421 Additional spare wiring
--	--------------------------------------

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

Optional

01208 Driveline related max GCM 35500 kg class 3	00778 Driveline related max GCM 58000 kg class 2
00200 Driveline related max GCM 38000 kg class 2	07279 Driveline related max GCM 60000 kg class 2
00209 Driveline related max GCM 40000 kg class 3	00818 Driveline related max GCM 60000 kg class 3
03673 Driveline related max GCM 44000 kg class 2	00157 Driveline related max GCM 61000 kg class 2
03675 Driveline related max GCM 50000 kg class 3	

APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

Optional

02260 Extra cab insulation	03648 Cyclonic air intake high
-----------------------------------	---------------------------------------

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended
--

VEHICLE DELIVERY


Optional

02008 No toolkit	06492 Toolkit Türkiye
02019 Standard toolkit	06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

XD 370

FAD 8X4 Rigid

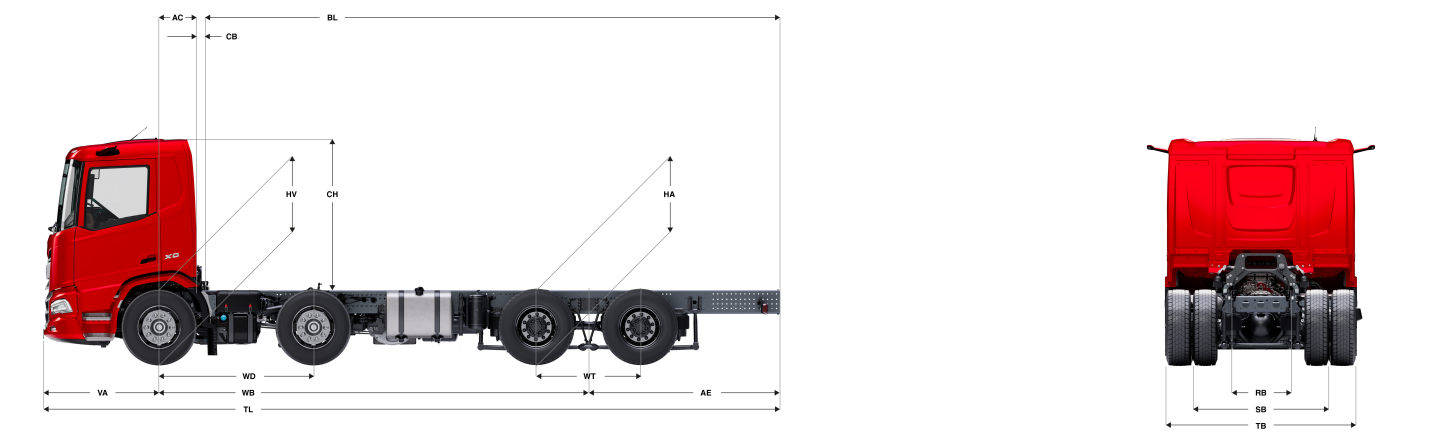

Wheelbase - AE			Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,05	1,65	6811	3064	9876	9189	15936	22124	0,50	0,07	2,01	6,03	6,65	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	6858	3227	10086	9142	15773	21914	0,50	0,07	2,01	6,34	7,00	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6783	2964	9747	9217	16036	22253	0,50	0,07	2,01	6,39	7,64	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6671	3195	9866	9329	15805	22134	0,50	0,07	2,01	7,14	8,58	10,08	1,16	1,09	22,32	23,65
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,05	1,65	6960	3030	9991	9040	15970	22009	0,83	0,07	2,01	5,40	6,03	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	7005	3195	10201	8995	15805	21799	0,83	0,07	2,01	5,70	6,38	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6927	2935	9862	9073	16065	22138	0,83	0,07	2,01	5,77	7,02	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6812	3169	9981	9188	15831	22019	0,83	0,07	2,01	6,52	7,96	10,08	1,16	1,09	22,32	23,65
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	5,05	1,65	6999	3022	10021	9001	15978	21979	0,83	0,07	2,49	5,40	6,04	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	7044	3187	10231	8956	15813	21769	0,83	0,07	2,49	5,72	6,40	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6964	2927	9892	9036	16073	22108	0,83	0,07	2,49	5,78	7,04	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6848	3163	10011	9152	15837	21989	0,83	0,07	2,49	6,54	7,98	10,08	1,16	1,09	22,32	23,65

OTHER DIMENSIONS	VA: 1,53	WD: 2,05	WT: 1,40	HV ¹²⁾ : 1,06	HV ¹³⁾ : 0,97	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
8) Unladen height at centre of driven axle(s).
9) Laden height at centre of driven axle(s).
10) TK = turning circle between kerbs.
11) TW = turning circle between walls.
12) Unladen height at centre of front axle(s).
13) Laden height at centre of front axle(s).
14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.