


Specification sheet

XFC 410

FAT 6X4 Rigid



ENGINES

- XFC NewGen 370 MX-11 (270 kW / 367 hp)
- XFC NewGen 410 MX-11 (300 kW / 408 hp)
- XFC NewGen 450 MX-11 (330 kW / 449 hp)
- XFC NewGen 430 MX-13 (315 kW / 428 hp)
- XFC NewGen 480 MX-13 (355 kW / 483 hp)
- XFC NewGen 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

- 26000 kg
-
- Max. front 8000 kg
- Max. rear 19000 kg

GCM²⁾

- 35500 kg
-
-
-



CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head and fog lights; Front view mirror.

Optional

07018 Sleeper Cab	01891 Hazard beacons on cab front, prepared
06244 Sleeper High Cab	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
04291 Cab step flexible	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01550 No front view mirror
00949 LED Skylights; aux. LED lights on cab rf, prepared	01362 DAF Digital Vision System
01925 Two LED work lamps for cab rear wall	01913 DAF Corner View

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	01538 Adj. roof air defl. long high >4m(!) Sleeper High
01902 Adj. rf air defl. long low >4m(!) XF Sl. High Cab	00082 Adj. roof air deflector for Day Cab
00124 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: grey.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; No arm rest driver seat; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	04070 Two drawers
02355 Steering wheel, leather	03954 Refrigerator
02146 Dashboard finish: Plateau	04050 Refrigerator and drawer
02353 Cab interior decoration: Argenta	04069 Two refrigerators
02350 Cab interior decoration: Natura	02838 Foam mattress for lower bunk
07733 Driver seat: Luxury Air	02854 Xtra Comfort mattress for lower bunk
07736 Driver seat: Super Air	01775 Xtra Comfort mattress with topper for lower bunk
07737 Driver seat: Xtra Leather Air	06970 Automatic Cab Climate Control
02117 Third seat	01967 Park air conditioning, integrated
03948 Single drawer	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	01915 DAF Infotainment System: Luxury Plus
06211 DAF Infotainment System with FM/DAB/DAB+ radio	09908 Cruise control
03470 DAF Infotainment System: Exclusive, prepared	06991 Predictive Cruise Control

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist
06410 Safe Load Pass preparation	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 167N; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

Optional

01769 Front axle load 7.50 t	04549 Rear axle load 10.50+ 10.50 t
06257 Front axle load 9.00 t	04563 Rear axle load 13.00+ 13.00 t
07494 Rear axle HR1670T	

WHEELS AND TYRES

Driven rear axle(s): 315/80R22.5; F1,315/80R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/80R22.5GO FMXDE 156/150 L Traction BBA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

Optional

07110 Eco performance	09638 Off-road applications
09636 Heavy haulage	01498 Off-road applications with Rock-free function
09637 Liquid transport	

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes at front, rear tandem axle with drum brakes. Dual circuit air system with electronic control (EBS)..

Optional

02715 ZF Intarder	01497 Park brake control pneumatic with spoken warning
01572 Park brake control electro-pneumatic	06127 Driven rear axle with disc brakes

CHASSIS

Wheelbase 4.55 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 505 mm; Tank for AdBlue® 45 l, left-hand side chassis; No front underrun protection; Spray suppression.

Optional

- 16157** Fuel tanks, material and sizes
07070 Spare wheel carrier left-hand side
- 03323** Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; No pneumatic trailer connection;
Electric connection 24 V / 2x7 pins.

Optional

- 07033** Trailer coupling Ringfeder D=13.7
07034 Trailer coupling Ringfeder D=20.0
08026 Trailer coupling Rockinger D=13.0
- 08027** Trailer coupling Rockinger D=20.0
04659 Trailer cable EBS

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

- 09421** Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

Optional

- 04492** Alternator 130 A
08775 Alternator 150 A
01257 Batteries 2x140Ah
- 07671** Batteries 2x210Ah AGM C-type
06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 26000 kg; Driveline related max GCM 35500 kg class 2.

Optional

- 01208** Driveline related max GCM 35500 kg class 3
03673 Driveline related max GCM 44000 kg class 2
03675 Driveline related max GCM 50000 kg class 3
00778 Driveline related max GCM 58000 kg class 2
- 00818** Driveline related max GCM 60000 kg class 3
02135 Driveline related max GCM 71000 kg class 2
02143 Driveline related max GCM 78000 kg class 2

APPLICATION CONDITIONS

Air intake front.

Optional

- 02260** Extra cab insulation
03648 Cyclonic air intake high
- 06614** Anti-dust blow-up shield
06620 Anti-dust blow-up shield + bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

- 07569** Lifting jack

OPTION PACKAGES


Optional

- 17448** Safety pack
17595 Executive Pack XD/XF
- 17625** Climate Pack

Go to **DAF.com** to configure your own perfect DAF.

XFC 410

FAT 6X4 Rigid

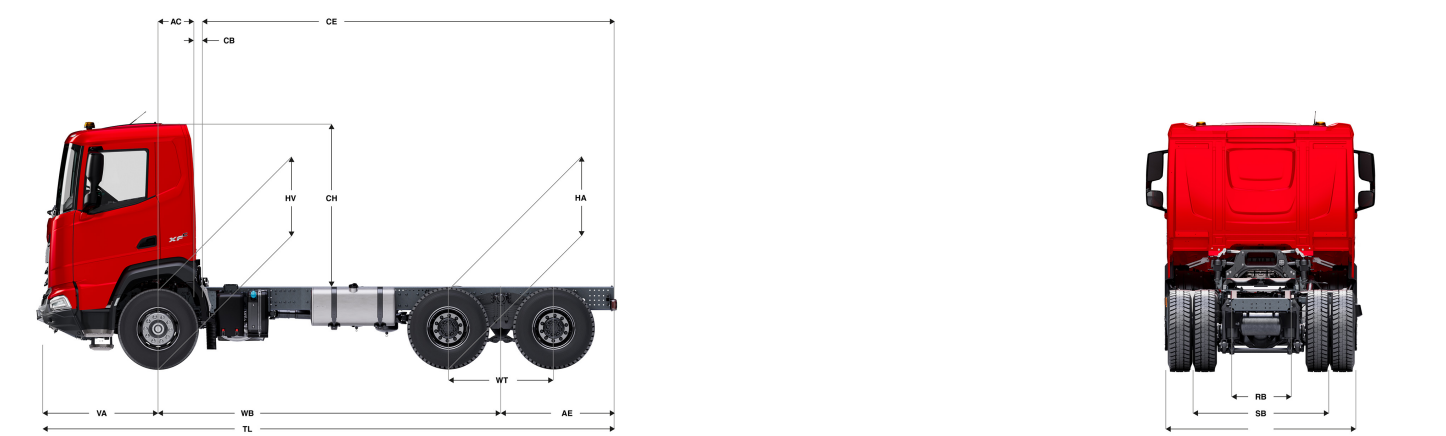

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	5054	3992	9047	2446	15008	16953	0,50	0,07	2,18	5,72	5,72	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	5038	3709	8747	2962	15291	17253	0,50	0,07	2,18	6,40	6,49	7,81	1,19	1,13	15,45	16,90
	5,00	1,65	5153	4174	9327	2847	14826	16673	0,50	0,07	2,18	7,22	7,22	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	5198	4651	9850	2802	14349	16150	0,50	0,07	2,18	8,11	8,11	10,36	1,16	1,11	18,05	19,54
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	5152	3997	9150	2348	15003	16850	0,83	0,07	2,18	5,10	5,10	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	5137	3714	8850	2863	15286	17150	0,83	0,07	2,18	5,78	5,88	7,81	1,19	1,13	15,45	16,90
	5,00	1,65	5252	4178	9430	2748	14822	16570	0,83	0,07	2,18	6,61	6,61	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	5297	4655	9952	2703	14345	16048	0,83	0,07	2,18	7,51	7,51	10,36	1,16	1,11	18,05	19,54
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	5186	3996	9182	2314	15004	16818	0,83	0,07	2,66	5,11	5,11	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	5170	3713	8883	2830	15287	17117	0,83	0,07	2,66	5,80	5,90	7,81	1,19	1,13	15,45	16,90
	5,00	1,65	5285	4178	9463	2715	14822	16537	0,83	0,07	2,66	6,62	6,62	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	5331	4654	9985	2669	14346	16015	0,83	0,07	2,66	7,53	7,53	10,36	1,16	1,11	18,05	19,54

OTHER DIMENSIONS	VA: 1,61	WT: 1,40	HV ¹²⁾ : 1,19	HV ¹³⁾ : 1,08	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).

9) Laden height at centre of driven axle(s).

10) TK = turning circle between kerbs.

11) TW = turning circle between walls.

12) Unladen height at centre of front axle(s).

13) Laden height at centre of front axle(s).

14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.