

Specification sheet

# XG 450

FTN 6X2 Tractor



ENGINES

- XG NewGen 450 MX-11 (330 kW / 449 hp)
- XG NewGen 430 MX-13 (315 kW / 428 hp)
- XG NewGen 480 MX-13 (355 kW / 483 hp)
- XG NewGen 530 MX-13 (390 kW / 530 hp)

GVM<sup>1)</sup>

- 26000 kg
- 
- Max. front 8000 kg
- Max. rear 19000 kg

GCM<sup>2)</sup>

- 44000 kg
- 
- 
- 

016G0329NAAA - 202513C - 06-12-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

### Optional

<b>02889</b> Chassis front execution: no bottom plate	<b>01925</b> Two LED work lamps for cab rear wall
<b>02952</b> Chassis front execution: bottom plate aero	<b>01891</b> Hazard beacons on cab front, prepared
<b>03358</b> External sun visor	<b>06629</b> Two hazard beacon lights
<b>06790</b> Aluminium ladder 1-piece	<b>03232</b> Front windscreen with solar control foil
<b>06791</b> Aluminium ladder 2-piece	
<b>03922</b> Fog lights front	<b>01550</b> No front view mirror
<b>00949</b> LED Skylights; aux. LED lights on cab rf, prepared	<b>01362</b> DAF Digital Vision System
	<b>01913</b> DAF Corner View

## AERODYNAMICS

### Optional

<b>03793</b> No roof air deflector	<b>04906</b> Side collars, one side hinged
<b>01567</b> Adj. roof air deflector; over 4 m (!) for XG cab	<b>03074</b> Side collars, both sides hinged

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

## CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water); No roof hatch.

### Optional

<b>02355</b> Steering wheel, leather	<b>04069</b> Two refrigerators
<b>02043</b> Dashboard finish: Vision	<b>02854</b> Xtra Comfort mattress for lower bunk
<b>02353</b> Cab interior decoration: Argenta	<b>02841</b> Foam mattress for adjustable lower bunk
<b>02350</b> Cab interior decoration: Natura	<b>01775</b> Xtra Comfort mattress with topper for lower bunk
<b>07733</b> Driver seat: Luxury Air	<b>02858</b> Xtra Comfort mattress for adjustable lower bunk
<b>07736</b> Driver seat: Super Air	<b>02860</b> Xtra Comfort mattress + topper for adj. lower bunk
<b>07737</b> Driver seat: Xtra Leather Air	<b>02380</b> Mattress for DAF Relax Bed
<b>02241</b> Driver seat, swivel base	<b>04150</b> Mattress with topper for DAF Relax Bed
<b>06469</b> Storage compartment with drawer in centre	<b>01066</b> Upper bunk
<b>04070</b> Two drawers	<b>06970</b> Automatic Cab Climate Control
<b>04050</b> Refrigerator and drawer	<b>01967</b> Park air conditioning, integrated

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

### Optional

<b>09681</b> Preparation for Maut	<b>03470</b> DAF Infotainment System: Exclusive, prepared
<b>06211</b> DAF Infotainment System with FM/DAB/DAB+ radio	<b>01915</b> DAF Infotainment System: Luxury Plus

## SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>00795</b> Safety regulations EC ADP
<b>02178</b> Main switch with second control in the cab	<b>01952</b> No DAF Side/Turn Assist
<b>02569</b> No Driver State Monitoring	

## SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

### Optional

<b>06257</b> Front axle load 9.00 t	<b>04057</b> Rear axle HR1356
<b>06095</b> Front axle load 10.00 t	<b>04588</b> Rear axle SR1347
<b>04647</b> Front springs air	<b>08191</b> Axle load monitoring

## WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P; R2,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P.

### Optional

**16152** Tyre makes and types

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

### Optional

<b>07110</b> Eco performance	<b>08371</b> Long Combination Vehicle (LCV)
<b>02314</b> Gearbox overdrive	<b>09638</b> Off-road applications
<b>07101</b> Standard transport, Lite version	<b>01498</b> Off-road applications with Rock-free function
<b>09636</b> Heavy haulage	<b>02843</b> Mechanical differential lock
<b>09637</b> Liquid transport	

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

#### Optional

02287	Exhaust brake	01572	Park brake control electro-pneumatic
02281	ZF Intarder	01497	Park brake control pneumatic with spoken warning
02304	MX Engine Brake and ZF Intarder	04901	Spring brake cylinders on the first front axle
02715	ZF Intarder		

#### CHASSIS

Wheelbase 3.40 m / rear overhang 0.84 m; Side member height 260 mm; 510 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

#### Optional

02601	Side member height 310 mm	03323	Rear light with LEDs
16157	Fuel tanks, material and sizes		

#### DRAWBAR AND TRAILER EQUIPMENT

JOST JSK36DV pressed steel 205+40mm; No lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

#### Optional

03178	Towing hook D= 4.3	16151	5th wheel makes and heights
07033	Trailer coupling Ringfeder D=13.7		

#### BODIES AND PREPARATIONS FOR BODYING

#### Optional

02811	Tail lift connection Anderson	02812	Tail lift connection REMA
-------	-------------------------------	-------	---------------------------

#### POWER TAKE-OFF (PTO)

#### Optional

16148	PTO types and positions
-------	-------------------------

#### 24V POWER SUPPLY

Alternator 130 A, batteries 2x 230 Ah..

#### Optional

08775	Alternator 150 A	07671	Batteries 2x210Ah AGM C-type
-------	------------------	-------	------------------------------

#### GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 44000 kg class 2.

#### APPLICATION CONDITIONS

Air intake front.

#### Optional

02260	Extra cab insulation	06620	Anti-dust blow-up shield + bugscreen
06614	Anti-dust blow-up shield		

#### SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

#### Optional

08311	Service interval extended
-------	---------------------------

#### VEHICLE DELIVERY

Minimum toolkit.

#### Optional

07569	Lifting jack
-------	--------------


#### OPTION PACKAGES

#### Optional

17448	Safety pack	17625	Climate Pack
17596	Executive Pack XG/XG+		

# XG 450

## FTN 6X2 Tractor

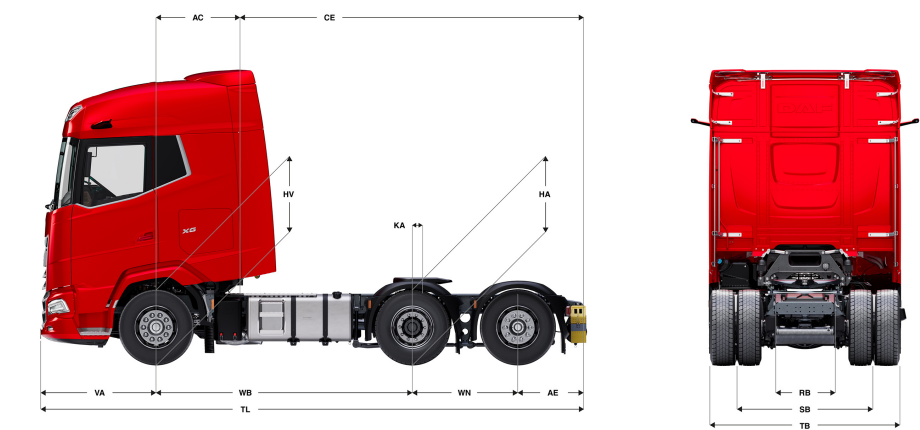

XG CAB	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions								
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA <sup>8)</sup>	TL	HA <sup>7)</sup>	HA <sup>8)</sup>	TK <sup>9)</sup>	TW <sup>10)</sup>
	3,40	0,84	5370	3387	8757	2630	15613	17243	1,16	4,48	2,96	-0,03	7,17	0,97	0,94	12,47	13,82
	3,70	1,10	5251	3268	8519	2749	15732	17481	1,16	5,04	2,91	0,00	7,73	1,02	0,99	13,24	14,62
OTHER DIMENSIONS			VA: 1,53	WN: 1,40	HV <sup>11)</sup> : 0,96	HV <sup>12)</sup> : 0,90	RB: 0,79	SB: 1,82	TB <sup>13)</sup> : 2,48								

1) GVM in conformity with registration documents.  
2) GCM in conformity with registration documents.  
3) Axle load with standard tyre size.  
4) Chassis and cab weight calculated with: Standard specification items only with 510 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.  
5) Other AE dimensions may be available for shown WB.  
6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).  
8) Laden height at centre of driven axle(s).  
9) TK = turning circle between kerbs.  
10) TW = turning circle between walls.  
11) Unladen height at centre of front axle(s).  
12) Laden height at centre of front axle(s).  
13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.