

Specification sheet

XG 450

FTP 6X2 Tractor



ENGINES

- XG NewGen 450 MX-11 (330 kW / 449 hp)
- XG NewGen 430 MX-13 (315 kW / 428 hp)
- XG NewGen 480 MX-13 (355 kW / 483 hp)
- XG NewGen 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

- 23900 kg
- Max. front 8000 kg
- Max. rear 15900 kg

GCM²⁾

- 44000 kg

016G0369PAAA - 202513C - 06-12-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

02889	Chassis front execution: no bottom plate	01925	Two LED work lamps for cab rear wall
02952	Chassis front execution: bottom plate aero	01891	Hazard beacons on cab front, prepared
03358	External sun visor	06629	Two hazard beacon lights
06790	Aluminium ladder 1-piece	03232	Front windscreen with solar control foil
06791	Aluminium ladder 2-piece	01550	No front view mirror
03922	Fog lights front	01362	DAF Digital Vision System
00949	LED Skylights; aux. LED lights on cab rf, prepared	01913	DAF Corner View

AERODYNAMICS

Optional

03793	No roof air deflector	04906	Side collars, one side hinged
01567	Adj. roof air deflector; over 4 m (!) for XG cab	03074	Side collars, both sides hinged

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water); No roof hatch.

Optional

02355	Steering wheel, leather	04069	Two refrigerators
02043	Dashboard finish: Vision	02854	Xtra Comfort mattress for lower bunk
02353	Cab interior decoration: Argenta	02841	Foam mattress for adjustable lower bunk
02350	Cab interior decoration: Natura	01775	Xtra Comfort mattress with topper for lower bunk
07733	Driver seat: Luxury Air	02858	Xtra Comfort mattress for adjustable lower bunk
07736	Driver seat: Super Air	02860	Xtra Comfort mattress + topper for adj. lower bunk
07737	Driver seat: Xtra Leather Air	02380	Mattress for DAF Relax Bed
02241	Driver seat, swivel base	04150	Mattress with topper for DAF Relax Bed
06469	Storage compartment with drawer in centre	01066	Upper bunk
04070	Two drawers	06970	Automatic Cab Climate Control
04050	Refrigerator and drawer	01967	Park air conditioning, integrated

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681	Preparation for Maut	03470	DAF Infotainment System: Exclusive, prepared
06211	DAF Infotainment System with FM/DAB/DAB+ radio	01915	DAF Infotainment System: Luxury Plus

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	00795	Safety regulations EC ADR
02178	Main switch with second control in the cab	01952	No DAF Side/Turn Assist
02569	No Driver State Monitoring		

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Non-steered leading axle.; Rear axle load 12.00 t; Rear: 16.60 t, air suspension, SR1344; Lifting device.

Optional

01769	Front axle load 7.50 t	04588	Rear axle SR1347
06257	Front axle load 9.00 t	08191	Axle load monitoring
04647	Front springs air		

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

Optional

07110	Eco performance	08371	Long Combination Vehicle (LCV)
07101	Standard transport, Lite version	09638	Off-road applications
09636	Heavy haulage	01498	Off-road applications with Rock-free function
09637	Liquid transport	02843	Mechanical differential lock

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02287	Exhaust brake	01572	Park brake control electro-pneumatic
02281	ZF Intarder	01497	Park brake control pneumatic with spoken warning
02304	MX Engine Brake and ZF Intarder	04901	Spring brake cylinders on the first front axle
02715	ZF Intarder		

CHASSIS

Wheelbase 4.05 m / rear overhang 0.99 m; Side member height 260 mm; Standard component location; 510 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

Optional

16157	Fuel tanks, material and sizes	03323	Rear light with LEDs
-------	--------------------------------	-------	----------------------

DRAWBAR AND TRAILER EQUIPMENT

JOST JSK36DV pressed steel 205+40mm; Lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

16151	5th wheel makes and heights
-------	-----------------------------

BODIES AND PREPARATIONS FOR BODYING

Optional

02811	Tail lift connection Anderson	02812	Tail lift connection REMA
-------	-------------------------------	-------	---------------------------

POWER TAKE-OFF (PTO)

Optional

16148	PTO types and positions
-------	-------------------------

24V POWER SUPPLY

Alternator 110 A, batteries 2x 230 Ah..

Optional

04492	Alternator 130 A	07671	Batteries 2x210Ah AGM C-type
08775	Alternator 150 A		

GVM AND GCM

Chassis weight related technical GVM max 23900 kg; Driveline related max GCM 44000 kg class 2.

APPLICATION CONDITIONS

Air intake front.

Optional

08400	Silent mode	06614	Anti-dust blow-up shield
02260	Extra cab insulation	06620	Anti-dust blow-up shield + bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311	Service interval extended
-------	---------------------------

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569	Lifting jack
-------	--------------

OPTION PACKAGES


Optional

17448	Safety pack	17625	Climate Pack
17596	Executive Pack XG/XG+		

Go to **DAF.com** to configure your own perfect DAF.

XG 450

FTP 6X2 Tractor

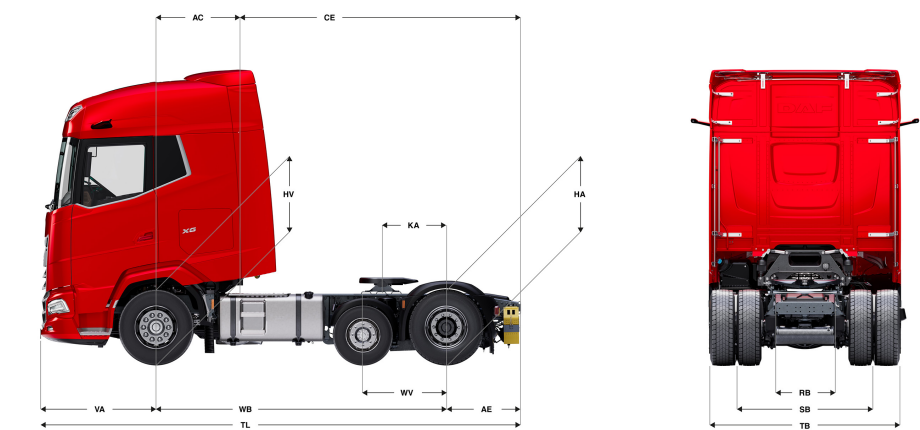

XG CAB	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions								
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA ⁸⁾	TL	HA ⁷⁾	HA ⁸⁾	TK ⁹⁾	TW ¹⁰⁾
	4,05	0,99	5119	3047	8166	2881	12853	15734	1,16	3,88	2,96	0,67	6,57	0,97	0,94	13,36	14,74
OTHER DIMENSIONS			VA: 1,53	WV: 1,10	HV ¹¹⁾ : 0,97	HV ¹²⁾ : 0,90	RB: 0,79	SB: 1,82	TB ¹³⁾ : 2,48								

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 510 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB.

6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).

8) Laden height at centre of driven axle(s).

9) TK = turning circle between kerbs.

10) TW = turning circle between walls.

11) Unladen height at centre of front axle(s).

12) Laden height at centre of front axle(s).

13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.