

Specification sheet

# XG 430

FTM 8X4 Tractor



ENGINES
XG NewGen 430 MX-13 (315 kW / 428 hp)
XG NewGen 480 MX-13 (355 kW / 483 hp)
XG NewGen 530 MX-13 (390 kW / 530 hp)

GVM <sup>1)</sup>	GCM <sup>2)</sup>
31000 kg	44000 kg
Max. front 8000 kg	
Max. rear 23000 kg	

016G0389AAAA - 202513C - 06-12-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

### Optional

<b>02889</b> Chassis front execution: no bottom plate	<b>01891</b> Hazard beacons on cab front, prepared
<b>02952</b> Chassis front execution: bottom plate aero	<b>06629</b> Two hazard beacon lights
<b>03358</b> External sun visor	<b>03232</b> Front windscreen with solar control foil
<b>03922</b> Fog lights front	<b>01550</b> No front view mirror
<b>00949</b> LED Skylights; aux. LED lights on cab rf, prepared	<b>01362</b> DAF Digital Vision System
<b>01925</b> Two LED work lamps for cab rear wall	<b>01913</b> DAF Corner View

## AERODYNAMICS

### Optional

<b>01567</b> Adj. roof air deflector; over 4 m (!) for XG cab	<b>04906</b> Side collars, one side hinged
<b>00069</b> Adjustable roof air deflector for XG cab	<b>03074</b> Side collars, both sides hinged

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

## CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Luggage carrier; Automatic Temperature Control and aircoc; Auxiliary cab heater (water); No roof hatch.

### Optional

<b>02355</b> Steering wheel, leather	<b>04069</b> Two refrigerators
<b>02043</b> Dashboard finish: Vision	<b>02854</b> Xtra Comfort mattress for lower bunk
<b>02353</b> Cab interior decoration: Argenta	<b>02841</b> Foam mattress for adjustable lower bunk
<b>02350</b> Cab interior decoration: Natura	<b>01775</b> Xtra Comfort mattress with topper for lower bunk
<b>07733</b> Driver seat: Luxury Air	<b>02858</b> Xtra Comfort mattress for adjustable lower bunk
<b>07736</b> Driver seat: Super Air	<b>02860</b> Xtra Comfort mattress + topper for adj. lower bunk
<b>07737</b> Driver seat: Xtra Leather Air	<b>02380</b> Mattress for DAF Relax Bed
<b>02241</b> Driver seat, swivel base	<b>04150</b> Mattress with topper for DAF Relax Bed
<b>06469</b> Storage compartment with drawer in centre	<b>01066</b> Upper bunk
<b>04070</b> Two drawers	<b>06970</b> Automatic Cab Climate Control
<b>04050</b> Refrigerator and drawer	<b>01967</b> Park air conditioning, integrated

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

### Optional

<b>09681</b> Preparation for Maut	<b>09908</b> Cruise control
<b>06211</b> DAF Infotainment System with FM/DAB/DAB+ radio	<b>09909</b> Adaptive Cruise Control (ACC) with FCW
<b>03470</b> DAF Infotainment System: Exclusive, prepared	<b>06991</b> Predictive Cruise Control
<b>01915</b> DAF Infotainment System: Luxury Plus	

## SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>02569</b> No Driver State Monitoring
<b>02178</b> Main switch with second control in the cab	<b>01952</b> No DAF Side/Turn Assist

## SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00+13.00 t; Rear: 34.00 t, air suspension, HR1670T; Lifting device.

### Optional

<b>06257</b> Front axle load 9.00 t	<b>08191</b> Axle load monitoring
<b>01601</b> Rear springs trapezium	

## WHEELS AND TYRES

Driven rear axle(s): 315/80R22.5; F1,315/80R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/80R22.5GO FMXDE 156/150 L Traction BBA 3P.

### Optional

<b>16152</b> Tyre makes and types
-----------------------------------

## DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 315 kW (428 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.46; ASR.

### Optional

<b>07110</b> Eco performance	<b>09638</b> Off-road applications
<b>09636</b> Heavy haulage	<b>01498</b> Off-road applications with Rock-free function
<b>09637</b> Liquid transport	

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes at front, rear tandem axle with drum brakes. Dual circuit air system with electronic control (EBS)..

### Optional

<b>02287</b> Exhaust brake	<b>02715</b> ZF Intarder
<b>02281</b> ZF Intarder	<b>01572</b> Park brake control electro-pneumatic
<b>02304</b> MX Engine Brake and ZF Intarder	<b>01497</b> Park brake control pneumatic with spoken warning

## CHASSIS

Wheelbase 4.65 m / rear overhang 1.65 m; Side member height 310 mm; 400 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; No rear mudguards; Spray suppression; Work lamp LED.

### Optional

**16157** Fuel tanks, material and sizes      **03323** Rear light with LEDs

## DRAWBAR AND TRAILER EQUIPMENT

JOST JSK36DV pressed steel 205+40mm; No lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

### Optional

**16151** 5th wheel makes and heights

## POWER TAKE-OFF (PTO)

### Optional

**16148** PTO types and positions

## 24V POWER SUPPLY

Alternator 130 A, batteries 2x 230 Ah..

### Optional

**08775** Alternator 150 A      **07671** Batteries 2x210Ah AGM C-type

## GVM AND GCM

Chassis weight related technical GVM max 41000 kg; Driveline related max GCM 58000 kg class 2.

## APPLICATION CONDITIONS

Air intake front.

### Optional

**02260** Extra cab insulation      **06614** Anti-dust blow-up shield  
**03648** Cyclonic air intake high      **06620** Anti-dust blow-up shield + bugscreen

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

**08311** Service interval extended

## VEHICLE DELIVERY

Minimum toolkit.

### Optional

**07569** Lifting jack

## OPTION PACKAGES


### Optional

**17448** Safety pack      **17625** Climate Pack  
**17596** Executive Pack XG/XG+

Go to **DAF.com** to configure your own perfect DAF.

# XG 430

## FTM 8X4 Tractor

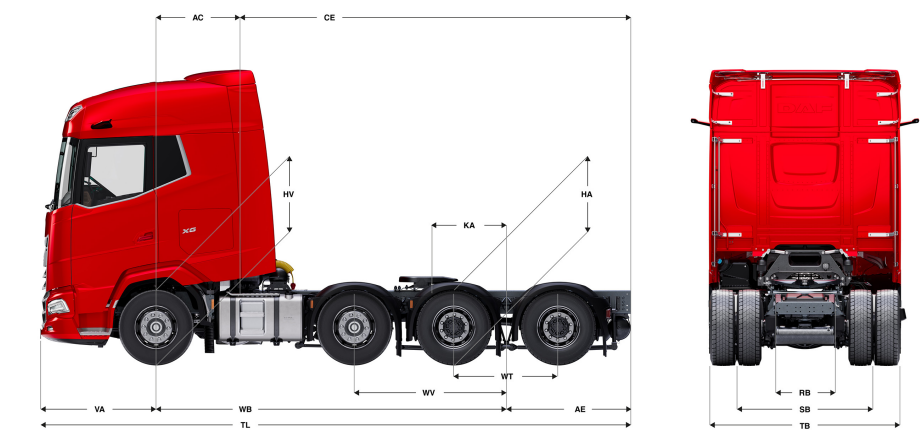

XG CAB	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions								
	WB	AE <sup>2)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA <sup>8)</sup>	TL	HA <sup>7)</sup>	HA <sup>8)</sup>	TK <sup>9)</sup>	TW <sup>10)</sup>
	4,65	1,65	5881	5350	11231	2119	17650	19768	1,16	5,14	2,78	0,37	7,83	1,07	1,04	15,71	17,13
OTHER DIMENSIONS			VA: 1,53	WV: 2,02	WT: 1,40	HV <sup>11)</sup> : 1,02	HV <sup>12)</sup> : 1,02	RB: 0,79	SB: 1,82	TB <sup>13)</sup> : 2,48							

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 400 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB.

6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).

8) Laden height at centre of driven axle(s).

9) TK = turning circle between kerbs.

10) TW = turning circle between walls.

11) Unladen height at centre of front axle(s).

12) Laden height at centre of front axle(s).

13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.