


Specification sheet

LF 180

FA 4X2 Rigid, 10t



ENGINES
LF 180 PX-5 (135 kW / 184 hp)
LF 210 PX-5 (157 kW / 213 hp)
LF 230 PX-7 (172 kW / 234 hp)
LF 260 PX-7 (194 kW / 264 hp)

GVM ¹⁾	GCM ²⁾
10000 kg	10000 kg
Max. front 4000 kg	
Max. rear 7600 kg	

016F3602BAAA - 202217B - 14-01-2022

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Green tinted glass; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

02576	Extended Day Cab	07343	Kerb view window co-driver door
02106	Sleeper Cab		
01173	Cab suspension mechanical	00915	Side no glass / rear single glass
01605	Cab suspension mechanical reinforced	09101	Green tinted glass, heated
09983	Fog lights	03605	Mirror brackets, body 2.10-2.29 m
09984	Fog lights and cornering lights	09282	Mirror brackets, body 2.30-2.40 m
		09283	Mirror brackets, body 2.40-2.50 m

AERODYNAMICS

Optional

09287	Side collars prepared	07112	Side collars long (set)
04906	Side collars	07093	Side collars short (set)

COLOURS

; Head lamp panel and bumper: Stone Grey; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	16153	Cab and chassis colours
-------	--	-------	-------------------------

CAB INTERIOR

Right-hand drive (RHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

01846	Left-hand drive (LHD)	04346	Lower bunk, normal level
09271	Steering wheel, leather, colour black	02213	Air conditioning
03516	Pneumatically adjustable steering column	03703	Auxiliary cab heater Air Top 2000
00967	Seat belts red	04246	Roof hatch, manual control
16158	Seat types	04258	Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C; Adaptive Cruise Control with FCW and AEBS-3.

Optional

16155	Audio equipment, makes and types	07261	TruckPhone
-------	----------------------------------	-------	------------

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	06634	Immobiliser 5 minutes and alarm (SCM BV03-B2)
01725	Reverse warning	06635	Immobiliser 15 minutes and alarm (SCM BV03-B3)
07414	Reverse warning with self-adjusting volume		
06633	Immobiliser 5 minutes (SCM BV03-B1)	16156	EC-ADR packages

SUSPENSION AND AXLES

Front: 4.00 t, parabolic, F48; Rear: 7.20 t, parabolic, SR8.22.

Optional

01372	Rear springs air	00369	Rear springs parabolic, asymmetric
-------	------------------	-------	------------------------------------

WHEELS AND TYRES

Front axle(s): 235/75R17.5; Driven rear axle(s): 235/75R17.5; Wheel protection rings silvergrey.

Optional

06764	Wheel protection rings black	16152	Tyre makes and types
-------	------------------------------	-------	----------------------

DRIVELINE

Engine PX-5, 4 cylinder diesel engine, 4.5 litres. Output 135 kW (184 hp) at 2300 rpm. Max. torque 750 Nm at 1100-1600 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Manual gearbox, 6 speeds; Gearbox ratio 6.58-0.78; Rear axle ratio 3.31.

Optional

08834	AS Tronic gearbox, 6 speeds
-------	-----------------------------

BRAKE SYSTEM

Exhaust brake.

CHASSIS

Wheelbase 4.30 m / rear overhang 2.32 m; Side member height 210 mm; EAS unit right, discharge right rearward; Plastic fuel tank 110 l; Tank for AdBlue® 25 l, right-hand side chassis; Spray suppression.

Optional

02011	Spare wheel carrier in rear overhang	03323	Rear light with LEDs
07071	Spare wheel carrier right-hand side		

DRAWBAR AND TRAILER EQUIPMENT

Closing member.

Optional

04661	D-value cross member D= 8.5
-------	-----------------------------

BODIES AND PREPARATIONS FOR BODYING

No BodyBuilder Module (BBM); Application connector chassis; Standard body attachment hole pattern.

Optional

09952	BodyBuilder Module (BBM) full	01503	Side marker lights
02597	Application connector for tail lift control	07487	Body attachment BAM 1, loose consoles supply
02950	Application connector for hydraulic platform	07488	Body attachment BAM 3, loose consoles supply
09240	Application connector for refuse collector		

POWER TAKE-OFF (PTO)

Optional

06624	Indirect front engine PTO	16148	PTO types and positions
06785	Front engine PTO, generator preparation 22.5 kW		

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional

01897 Alternator 100 A

08797 Batteries 2x175Ah

GVM AND GCM

Chassis weight related technical GVM max 10000 kg; Driveline related technical GCM equal to GVM.

Optional

00728 Driveline related max
GCM 20000 kg

03700 Driveline related
technical GCM = GVM+
3500 kg

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

02270 Cold climate

09960 Air intake on the cab roof

04767 Moisture separator,
heated

04987 Radiator flyscreen

04482 Air intake high behind
cab

SERVICE AND MAINTENANCE

Warranty Plus - 1 Year Vehicle & 3 Year Driveline - takes care of all warrantable repairs on the vehicle for one year and on the driveline for second and third years together with associated breakdown coverage.; DAF 2 year Preventive Maintenance Package - 320k.

VEHICLE DELIVERY


Standard toolkit.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

LF 180

FA 4X2 Rigid, 10t

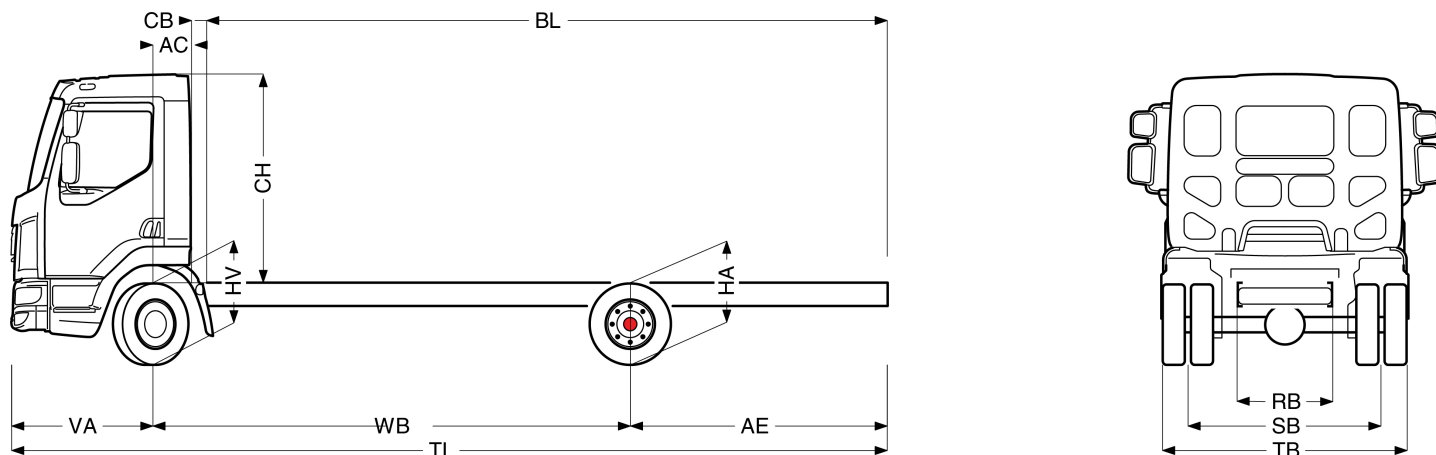

Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
3,05	1,80	2572	1072	3644	1428	6528	6356	0,33	0,12	1,84	3,83	5,36	6,13	1,05	0,91	10,58	11,89
3,15	1,62	2610	1094	3704	1390	6506	6296	0,33	0,12	1,84	4,01	5,60	6,05	1,05	0,92	10,82	12,14
3,55	1,87	2596	1088	3685	1404	6512	6315	0,33	0,12	1,84	4,63	6,42	6,70	1,05	0,92	11,79	13,13
3,90	2,12	2601	1104	3706	1399	6496	6294	0,33	0,12	1,84	5,17	7,15	7,30	1,05	0,92	12,64	14,00
4,30	2,32	2609	1119	3728	1391	6481	6272	0,33	0,12	1,84	5,79	7,98	7,90	1,05	0,92	13,62	14,99
4,65	2,65	2615	1146	3761	1385	6454	6239	0,33	0,12	1,84	6,34	8,71	8,58	1,05	0,92	14,48	15,87
5,00	2,72	2633	1160	3793	1367	6440	6207	0,33	0,12	1,84	6,90	9,46	9,00	1,05	0,92	15,34	16,74
5,40	2,32	2656	1140	3796	1344	6460	6204	0,33	0,12	1,84	7,57	10,33	9,00	1,05	0,92	16,32	17,73
5,70	2,30	2675	1154	3829	1325	6446	6171	0,33	0,12	1,84	8,06	11,00	9,28	1,05	0,93	17,06	18,48
6,10	2,55	2683	1173	3856	1317	6427	6144	0,33	0,12	1,84	8,68	11,85	9,93	1,05	0,92	18,05	19,48
6,40	2,70	2687	1184	3871	1313	6416	6129	0,33	0,12	1,84	9,16	12,49	10,38	1,05	0,92	18,79	20,23
6,70	2,90	2699	1210	3909	1301	6390	6091	0,33	0,12	1,84	9,65	13,15	10,88	1,05	0,92	19,54	20,98
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
3,55	1,87	2702	1105	3808	1298	6495	6192	0,73	0,07	1,87	4,01	5,85	6,70	1,05	0,91	11,79	13,13
3,90	2,12	2709	1120	3829	1291	6480	6171	0,73	0,07	1,87	4,58	6,58	7,30	1,05	0,91	12,64	14,00
4,30	2,32	2718	1133	3851	1282	6467	6149	0,73	0,07	1,87	5,21	7,43	7,90	1,05	0,91	13,62	14,99
4,65	2,65	2725	1160	3884	1275	6440	6116	0,73	0,07	1,87	5,76	8,19	8,58	1,05	0,91	14,48	15,87
5,00	2,72	2743	1172	3916	1257	6428	6084	0,73	0,07	1,87	6,35	8,96	9,00	1,05	0,92	15,34	16,74
5,40	2,32	2768	1151	3919	1232	6449	6081	0,73	0,07	1,87	7,02	9,85	9,00	1,05	0,92	16,32	17,73
5,70	2,30	2787	1165	3952	1213	6435	6048	0,73	0,07	1,87	7,52	10,52	9,28	1,05	0,92	17,06	18,48
6,10	2,55	2795	1184	3979	1205	6416	6021	0,73	0,07	1,87	8,17	11,39	9,93	1,05	0,92	18,05	19,48
6,40	2,70	2800	1194	3995	1200	6406	6005	0,73	0,07	1,87	8,66	12,05	10,38	1,05	0,92	18,79	20,23
6,70	2,90	2812	1220	4032	1188	6380	5968	0,73	0,07	1,87	9,14	12,72	10,88	1,05	0,92	19,54	20,98

OTHER DIMENSIONS		VA: 1,28	HV ¹³⁾ : 0,94	HV ¹⁴⁾ : 0,87	RB: 0,86	SB: 1,74	TB ¹⁵⁾ : 2,32
------------------	--	----------	--------------------------	--------------------------	----------	----------	--------------------------

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 110 litres of fuel, 25 litres of AdBlue® and driver of 90 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.