


# Specification sheet

# LF 230

FA 4X2 Rigid, 19t Chassis/Body



## ENGINES

- LF 230 PX-7 (172 kW / 234 hp)
- LF 260 PX-7 (194 kW / 264 hp)
- LF 290 PX-7 (217 kW / 295 hp)
- LF 320 PX-7 (239 kW / 325 hp)

## GVM<sup>1)</sup>

- 18000 kg
- Max. front 7500 kg
- Max. rear 11500 kg

## GCM<sup>2)</sup>

- 19000 kg

016F5603BAAA - 202217B - 14-01-2022

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Green tinted glass; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

02576	Extended Day Cab	09984	Fog lights and cornering lights
02106	Sleeper Cab	07343	Kerb view window co-driver door
01605	Cab suspension mechanical reinforced	00915	Side no glass / rear single glass
09983	Fog lights	09101	Green tinted glass, heated

## AERODYNAMICS

Optional

09287	Side collars prepared	07112	Side collars long (set)
04906	Side collars		

## COLOURS

; Head lamp panel and bumper: Stone Grey; Chassis colour grey.; No body panels.

Optional

06485	Head lamp panel and bumper: cab colour	16153	Cab and chassis colours
-------	--	-------	-------------------------

## CAB INTERIOR

Right-hand drive (RHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

09271	Steering wheel, leather, colour black	02213	Air conditioning
03516	Pneumatically adjustable steering column	03703	Auxiliary cab heater Air Top 2000
00967	Seat belts red	04246	Roof hatch, manual control
16158	Seat types	04258	Roof hatch, electric control
04346	Lower bunk, normal level		

## COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C; Adaptive Cruise Control with FCW and AEBS-3.

Optional

16155	Audio equipment, makes and types	07261	TruckPhone
-------	----------------------------------	-------	------------

## SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	06634	Immobiliser 5 minutes and alarm (SCM BV03-B2)
01725	Reverse warning		
07414	Reverse warning with self-adjusting volume	06635	Immobiliser 15 minutes and alarm (SCM BV03-B3)
06633	Immobiliser 5 minutes (SCM BV03-B1)	16156	EC-ADR packages

## SUSPENSION AND AXLES

Front axle type 152N, 100 mm vertical offset. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 7.5 tonnes.; Single reduction driven rear axle type SR1132 with parabolic leaf suspension, including shock absorbers and stabiliser. Max. load 11.5 tonnes..

Optional

01800	Rear axle SR1344	01778	Rear axle load 13.00 t
01372	Rear springs air		

## WHEELS AND TYRES

Front axle(s): 295/80R22.5; Driven rear axle(s): 295/80R22.5; Wheel protection rings silvergrey.

Optional

06764	Wheel protection rings black	16152	Tyre makes and types
06766	Wheel protection rings chromium DAF		

## DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 172 kW (234 hp) at 2300 rpm. Max. torque 900 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Manual gearbox, 6 speeds; Gearbox ratio 6.75-0.78; Rear axle ratio 5.13.

Optional

04393	Manual gearbox, 9 speeds	04500	AS Tronic gearbox, 12 speeds
08834	AS Tronic gearbox, 6 speeds	02313	Gearbox direct drive

## BRAKE SYSTEM

Exhaust brake.

## CHASSIS

Wheelbase 5.30 m / rear overhang 2.40 m; Side member height 270 mm; EAS unit right, discharge right rearward; Plastic fuel tank 200 l; Tank for AdBlue® 25 l, right-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

03323	Rear light with LEDs
-------	----------------------

## DRAWBAR AND TRAILER EQUIPMENT

Closing member.

Optional

04638	Trailer coupling D= 8.5	01948	D-value cross member D=10
04661	D-value cross member D= 8.5		

## BODIES AND PREPARATIONS FOR BODYING

No BodyBuilder Module (BBM); Application connector on the cab front; Standard body attachment hole pattern.

#### Optional

09952	BodyBuilder Module (BBM) full	02717	Aluminium kick strips, front and sides 228 mm
00126	Body attachment BAM 1, consoles type B	02712	Aluminium kick strips, front 228 mm
02357	Box body	02727	Galvanised kick strips, front and sides 200 mm
01890	Curtain sider body	02728	Plywood kick strips, front and sides 300 mm
01027	External body length 7300 mm	02738	Plywood kick strips, front 1200 mm, sides 300 mm
01028	External body length 7930 mm	04650	Rear wide lath shutter door
01048	External body length 8540 mm	04662	Rear double doors
04621	External body width 2540 mm	02726	Single, hinged side door at front left-hand side
01403	GRP faced plywood panels	02718	Side roller shutter door
00067	Contour markings	00312	Column tail lift 1.5 tonnes
02702	Standard body floor	00313	Tuck-under tail lift 1.5 tonnes
02698	Body floor with 3 mm aluminium tread plate		

### POWER TAKE-OFF (PTO)

#### Optional

16148 PTO types and positions

### ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

#### Optional

01897 Alternator 100 A                      08797 Batteries 2x175Ah

### GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related technical GCM equal to GVM.

#### Optional

00064	Driveline related max GCM 22500 kg	00620	Driveline related max GCM 28000 kg
02658	Driveline related max GCM 26000 kg	03027	Driveline related max GCM 32000 kg class 3

### APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

#### Optional

02270	Cold climate	09960	Air intake on the cab roof
04767	Moisture separator, heated	04987	Radiator flyscreen

### SERVICE AND MAINTENANCE

Warranty Plus - 1 Year Vehicle & 3 Year Driveline - takes care of all warrantable repairs on the vehicle for one year and on the driveline for second and third years together with associated breakdown coverage.; DAF 2 year Preventive Maintenance Package - 320k.

### VEHICLE DELIVERY



Standard toolkit.



Go to [DAF.com](http://DAF.com) to configure your own perfect DAF.

# LF 230

FA 4X2 Rigid, 19t Chassis/Body

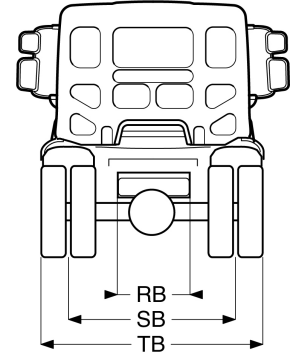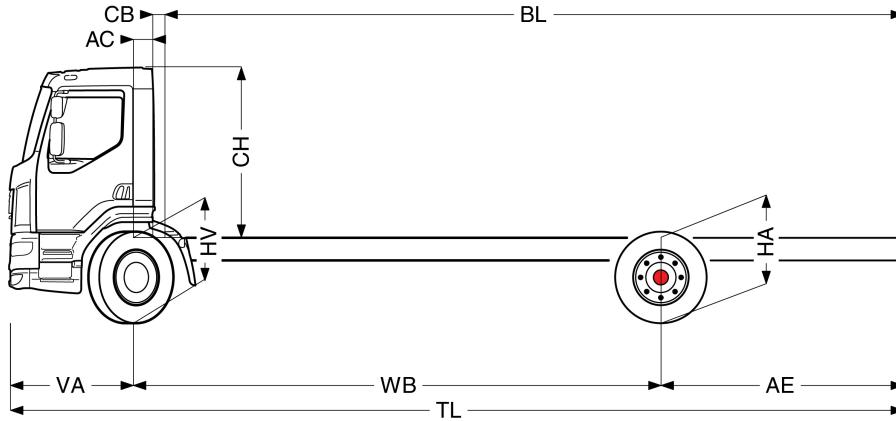

	Wheelbase - AE		Unladen weight <sup>4)</sup>			Gross Carrying Capacity			Variable dimensions									
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CB <sup>6)</sup>	CH <sup>7)</sup>	BL <sup>8)</sup>	BL	TL	HA <sup>9)</sup>	HA <sup>10)</sup>	TK <sup>11)</sup>	TW <sup>12)</sup>
DAY CAB	5,30	2,40	3367	1872	5238	4133	9628	12762	0,23	0,26	1,88	6,19	7,02	9,08	1,14	0,96	18,02	19,20
	5,85	2,68	3411	1945	5355	4089	9555	12645	0,23	0,26	1,88	6,95	7,85	9,90	1,14	0,96	19,53	20,73
	6,25	2,88	3423	1968	5391	4077	9532	12609	0,23	0,26	1,88	7,49	8,45	10,50	1,14	0,96	20,63	21,84
SLEEPER CAB	5,30	2,40	3501	1860	5361	3999	9640	12639	0,63	0,20	1,88	5,60	6,42	9,08	1,14	0,95	18,02	19,20
	5,85	2,68	3544	1934	5478	3956	9566	12522	0,63	0,20	1,88	6,35	7,27	9,90	1,14	0,95	19,53	20,73
	6,25	2,88	3555	1958	5514	3945	9542	12486	0,63	0,20	1,88	6,89	7,89	10,50	1,14	0,95	20,63	21,84

OTHER DIMENSIONS	VA: 1,38	HV <sup>13)</sup> : 1,03	HV <sup>14)</sup> : 0,94	RB: 0,79	SB: 1,82	TB <sup>15)</sup> : 2,45
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 200 litres of fuel, 25 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.