


Specification sheet

XDC 300

FAT 6X4 Rigid



ENGINES

- XDC NewGen 300 MX-11 (220 kW / 299 hp)
- XDC NewGen 340 MX-11 (251 kW / 341 hp)
- XDC NewGen 370 MX-11 (270 kW / 367 hp)
- XDC NewGen 410 MX-11 (300 kW / 408 hp)
- XDC NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

- 26000 kg
-
- Max. front 8000 kg
- Max. rear 19000 kg

GCM²⁾

- 38000 kg
-
-
-

016F0141CAAA - 202545A - 15-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO₂ emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head and fog lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	07201 Skylights
06244 Sleeper High Cab	03232 Front windscreen with solar control foil
01226 Cab suspension air	03317 Rear window: double glass
04291 Cab step flexible	07343 Kerb view window co-driver door
04355 Air horns, prepared	01886 Laminated glass with solar control foil
00847 Air horns, single set	01354 No main mirrors
09006 Air horns, double set	01362 DAF Digital Vision System
02591 High Beam Assist	01912 No DAF Corner View
01925 Two LED work lamps for cab rear wall	06497 No rear view camera
01891 Hazard beacons on cab front, prepared	03151 Rear view camera with prep for 2nd camera
06629 Two hazard beacon lights	

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

01698 Adj. rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16154 Roof air deflectors, types and settings
01818 Adj. roof air deflector long low Sleeper High Cab	

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: grey.

Optional

16153 Cab and chassis colours	02989 Colour of bumper: Brilliant White
04984 Colour of bumper: Crystal White	02990 Colour of bumper: cab colour

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; No Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	01219 Speakers: Exclusive
07021 PACCAR Connect with navigation and tablet software	09908 Cruise control
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	06991 Predictive Cruise Control
03684 Infotainment including DAF Truck Navigation	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	06410 Safe Load Pass preparation
02567 No Traffic Sign Assist	00795 Safety regulations EC ADR
02569 No Driver State Monitoring	16156 EC-ADR packages
03628 DAF drowsiness & distraction detection	01929 No Drive-off Assist
09991 No Lane Departure Warning System	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 167N; Front springs parabolic; Rear axle HR1670T; Rear springs trapezium; Rear axle load 10.50+10.50 t; Rear: 21.00 t, trapezium, HR1670T; No lifting device.

Optional

03860 Front: 7.50 t, parabolic, 167N	04545 Rear axle load 9.50+9.50 t
00300 Front: 9.00 t, parabolic, 187N	04563 Rear axle load 13.00+13.00 t
08730 Rear axle SR1132T	

Front axle(s): 315/80R22.5; Driven rear axle(s): 315/80R22.5;
Goodyear; Tyre pressure monitoring.

08101 No tyre pressure monitoring	16152 Tyre makes and types
--	-----------------------------------

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres.
Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Automated gearbox, TraXon, 12 speeds.; Automated gearbox type TraXon 12TX1810, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.76; Mechanical differential lock.

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with drum brakes.

02366	MX Engine Brake	01497	Park brake control
02281	ZF Intarder		pneumatic with spoken
02304	MX Engine Brake and ZF		warning
	Intarder	06032	Spring brake cylinder on
02715	ZF Intarder		rear tandem axle 1 and 2
01572	Park brake control electro	04375	Park brake electro-
	-pneumatic		pneumatic
		03969	Park brake assist
		06127	Driven rear axle with disc
			brakes

Wheelbase 4.55 m / rear overhang 1.65 m; Side member 310/7.0 mm, front/rear reinforcement; Side member height 310 mm; 340 l alu fuel tank LH, height 505 mm; Tank for AdBlue® 45 l, left-hand side chassis.

16157 Fuel tanks, material and sizes

Closing member D-value = 0kN.

02729	Application connector Plug & Play	09240	Application connector for refuse coll. (EN1501-1)
09421	Additional spare wiring		

16148 PTO types and positions

Alternator 110 A, batteries 2x 140 Ah..

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

00515	Driveline related max GCM 32000 kg class 2
03027	Driveline related max GCM 32000 kg class 3
01207	Driveline related max GCM 35500 kg class 2
01208	Driveline related max GCM 35500 kg class 3
00209	Driveline related max GCM 40000 kg class 3

03673	Driveline related max GCM 44000 kg class 2
03675	Driveline related max GCM 50000 kg class 3
00778	Driveline related max GCM 58000 kg class 2
00818	Driveline related max GCM 60000 kg class 3

Regular cab insulation; Air intake front.

02260 Extra cab insulation **03648** Cyclonic air intake high



Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

08311 Service interval extended

02008 No toolkit	06492 Toolkit Türkiye
02019 Standard toolkit	06491 Toolkit Eastern Europe

XDC 300

FAT 6X4 Rigid

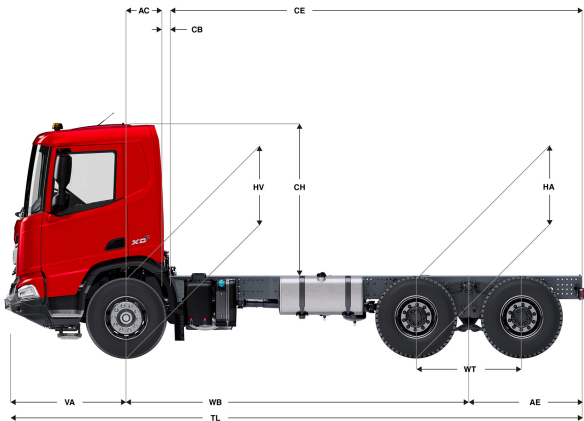

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	4820	3945	8766	2680	15055	17234	0,50	0,07	2,01	5,62	5,62	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	4863	4049	8912	3137	14951	17088	0,50	0,07	2,01	6,35	6,35	7,81	1,17	1,12	15,45	16,90
	5,00	1,65	4914	4123	9036	3086	14877	16964	0,50	0,07	2,01	7,11	7,11	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	4967	4594	9561	3033	14406	16439	0,50	0,07	2,01	7,99	7,99	10,36	1,16	1,11	18,05	19,54
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	4935	3939	8874	2565	15061	17126	0,83	0,07	2,01	5,01	5,01	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	4976	4043	9020	3024	14957	16980	0,83	0,07	2,01	5,74	5,74	7,81	1,17	1,12	15,45	16,90
	5,00	1,65	5027	4118	9145	2973	14882	16855	0,83	0,07	2,01	6,50	6,50	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	5079	4590	9669	2921	14410	16331	0,83	0,07	2,01	7,39	7,39	10,36	1,16	1,11	18,05	19,54
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	1,50	4965	3938	8903	2535	15062	17097	0,83	0,07	2,49	5,03	5,03	7,16	1,17	1,12	14,15	15,58
	4,55	1,65	5006	4043	9049	2994	14957	16951	0,83	0,07	2,49	5,75	5,75	7,81	1,17	1,12	15,45	16,90
	5,00	1,65	5057	4117	9174	2943	14883	16826	0,83	0,07	2,49	6,52	6,52	8,26	1,16	1,12	16,62	18,09
	5,55	3,20	5109	4589	9699	2891	14411	16301	0,83	0,07	2,49	7,40	7,40	10,36	1,16	1,11	18,05	19,54

OTHER DIMENSIONS	VA: 1,61	WT: 1,40	HV ¹²⁾ : 1,19	HV ¹³⁾ : 1,08	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).

9) Laden height at centre of driven axle(s).

10) TK = turning circle between kerbs.

11) TW = turning circle between walls.

12) Unladen height at centre of front axle(s).

13) Laden height at centre of front axle(s).

14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.