


Specification sheet

# XDC 370

FAD 8X4 Rigid, Mixer



ENGINES

- XDC NewGen 370 MX-11 (270 kW / 367 hp)
- XDC NewGen 410 MX-11 (300 kW / 408 hp)
- XDC NewGen 450 MX-11 (330 kW / 449 hp)

GVM<sup>1)</sup>

- 32000 kg
- Max. front 14200 kg
- Max. rear 19000 kg

GCM<sup>2)</sup>

- 35500 kg

016F0171CBAA - 2025/45A - 15-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head and fog lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

### Optional

|                                                    |                                                        |
|----------------------------------------------------|--------------------------------------------------------|
| <b>07018</b> Sleeper Cab                           | <b>07201</b> Skylights                                 |
| <b>06244</b> Sleeper High Cab                      | <b>03232</b> Front windscreen with solar control foil  |
| <b>01226</b> Cab suspension air                    | <b>03317</b> Rear window: double glass                 |
| <b>04291</b> Cab step flexible                     | <b>07343</b> Kerb view window co-driver door           |
| <b>04355</b> Air horns, prepared                   | <b>01886</b> Laminated glass with solar control foil   |
| <b>00847</b> Air horns, single set                 | <b>01354</b> No main mirrors                           |
| <b>09006</b> Air horns, double set                 | <b>01362</b> DAF Digital Vision System                 |
| <b>02591</b> High Beam Assist                      | <b>01912</b> No DAF Corner View                        |
| <b>01925</b> Two LED work lamps for cab rear wall  | <b>06497</b> No rear view camera                       |
| <b>01891</b> Hazard beacons on cab front, prepared | <b>03151</b> Rear view camera with prep for 2nd camera |
| <b>06629</b> Two hazard beacon lights              |                                                        |

## AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

### Optional

|                                                                  |                                                             |
|------------------------------------------------------------------|-------------------------------------------------------------|
| <b>01698</b> Adj. rf air defl. long high >4m(!) Sleeper High Cab | <b>01805</b> Adj. roof air defl. short for Sleeper High Cab |
| <b>07332</b> Adj. roof air deflector for Day Cab                 | <b>04906</b> Side collars, one side hinged                  |
| <b>07340</b> Adj. roof air deflector for Sleeper Cab             | <b>03074</b> Side collars, both sides hinged                |
| <b>07347</b> Adj. rf air defl. long mid >4m(!) Sleeper High Cab  | <b>16150</b> No roof air deflectors, types and settings     |

## COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: grey.

### Optional

|                                              |                                                |
|----------------------------------------------|------------------------------------------------|
| <b>16159</b> No cab and chassis colours      | <b>02989</b> Colour of bumper: Brilliant White |
| <b>04984</b> Colour of bumper: Crystal White | <b>02990</b> Colour of bumper: cab colour      |

## CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; No park air conditioning.

### Optional

|                                                              |                                                               |
|--------------------------------------------------------------|---------------------------------------------------------------|
| <b>02354</b> Steering wheel with silver accents              | <b>03848</b> Co-driver seat: cinema with leather cover        |
| <b>02355</b> Steering wheel, leather                         | <b>07746</b> Co-driver seat: Super Air                        |
| <b>02353</b> Cab interior decoration: Argenta                | <b>03862</b> Co-driver seat: cinema + table; leather cover    |
| <b>02350</b> Cab interior decoration: Natura                 | <b>07748</b> Co-driver seat: Xtra Leather Air                 |
| <b>07733</b> Driver seat: Luxury Air                         | <b>02117</b> Third seat                                       |
| <b>07736</b> Driver seat: Super Air                          | <b>02837</b> Dashboard table                                  |
| <b>07737</b> Driver seat: Xtra Leather Air                   | <b>03948</b> Single drawer                                    |
| <b>03461</b> Co-driver seat: cinema + table; fabric cover    | <b>03954</b> Refrigerator                                     |
| <b>07741</b> Co-driver seat: Comfort Air                     | <b>02838</b> Foam mattress for lower bunk                     |
| <b>03781</b> Co-driver seat: cinema with alcantara cover     | <b>02854</b> Xtra Comfort mattress for lower bunk             |
| <b>07743</b> Co-driver seat: Luxury Air                      | <b>01775</b> Xtra Comfort mattress with topper for lower bunk |
| <b>03849</b> Co-driver seat: cinema + table; alcantara cover | <b>04258</b> Roof hatch, electric control                     |

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control (ACC) with FCW; No Predictive Cruise Control.

### Optional

|                                                                 |                                                          |
|-----------------------------------------------------------------|----------------------------------------------------------|
| <b>07020</b> PACCAR Connect with navigation                     | <b>01219</b> Speakers: Exclusive                         |
| <b>07021</b> PACCAR Connect with navigation and tablet software | <b>09908</b> Cruise control                              |
| <b>03470</b> Infotainment incl. DAF Truck Nav. and tablet prep. | <b>08023</b> Adaptive Cruise Control with FCW and AEBS-3 |
| <b>03684</b> Infotainment including DAF Truck Navigation        | <b>06991</b> Predictive Cruise Control                   |

## SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

### Optional

|                                                          |                                              |
|----------------------------------------------------------|----------------------------------------------|
| <b>08631</b> Air bag (driver) and 2 seat belt tensioners | <b>09491</b> Vehicle Stability Control (VSC) |
| <b>02567</b> No Traffic Sign Assist                      | <b>00795</b> Safety regulations EC ADP       |
| <b>02569</b> No Driver State Monitoring                  | <b>16156</b> EC-ADR packages                 |
| <b>03628</b> DAF drowsiness & distraction detection      | <b>01929</b> No Drive-off Assist             |
| <b>09991</b> No Lane Departure Warning System            | <b>01952</b> No DAF Side/Turn Assist         |

## SUSPENSION AND AXLES

Front: 2x 7.10 t, parabolic, 167N; Front springs parabolic; Rear axle SR1132T; Rear springs trapezium; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

## WHEELS AND TYRES

Front axle(s): 315/80R22.5; Driven rear axle(s): 315/80R22.5; Goodyear; Tyre pressure monitoring.

### Optional

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>08101</b> No tyre pressure monitoring | <b>16152</b> Tyre makes and types |
|------------------------------------------|-----------------------------------|

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres.  
Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1950 Nm at 900-1125 rpm.; Automated gearbox, TraXon, 12 speeds.;  
Automated overdrive gearbox TraXon 12TX2610, ratio 12.92-0.77, 12 speeds.; Rear axle ratio 3.73; Mechanical differential lock.

## BRAKE SYSTEM

Park brake control pneumatic; Park brake pneumatic; Driven rear axle with disc brakes.

### Optional

|                                                   |                                                               |
|---------------------------------------------------|---------------------------------------------------------------|
| <b>02287</b> Exhaust brake                        | <b>01497</b> Park brake control pneumatic with spoken warning |
| <b>02281</b> ZF Intarder                          | <b>04375</b> Park brake electro-pneumatic                     |
| <b>02304</b> MX Engine Brake and ZF Intarder      | <b>03969</b> Park brake assist                                |
| <b>02715</b> ZF Intarder                          | <b>00929</b> Driven rear axle with drum brakes                |
| <b>01572</b> Park brake control electro-pneumatic |                                                               |

## CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member 310/6.0 mm, full length reinforcement; Side member height 310 mm; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box.

### Optional

|                                             |
|---------------------------------------------|
| <b>16157</b> Fuel tanks, material and sizes |
|---------------------------------------------|

## DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

## BODIES AND PREPARATIONS FOR BODYING

### Optional

|                                                |                                      |
|------------------------------------------------|--------------------------------------|
| <b>02729</b> Application connector Plug & Play | <b>09421</b> Additional spare wiring |
|------------------------------------------------|--------------------------------------|

## POWER TAKE-OFF (PTO)

### Optional

|                                      |
|--------------------------------------|
| <b>16148</b> PTO types and positions |
|--------------------------------------|

## 24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

## GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

### Optional

|                                                         |
|---------------------------------------------------------|
| <b>01208</b> Driveline related max GCM 35500 kg class 3 |
|---------------------------------------------------------|

## APPLICATION CONDITIONS

Regular cab insulation; Air intake front.

### Optional

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| <b>02260</b> Extra cab insulation | <b>03648</b> Cyclonic air intake high |
|-----------------------------------|---------------------------------------|

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

|                                        |
|----------------------------------------|
| <b>08311</b> Service interval extended |
|----------------------------------------|


## VEHICLE DELIVERY

### Optional

|                               |                                     |
|-------------------------------|-------------------------------------|
| <b>02008</b> No toolkit       | <b>06492</b> Toolkit Türkiye        |
| <b>02019</b> Standard toolkit | <b>06491</b> Toolkit Eastern Europe |

# XDC 370

## FAD 8X4 Rigid, Mixer

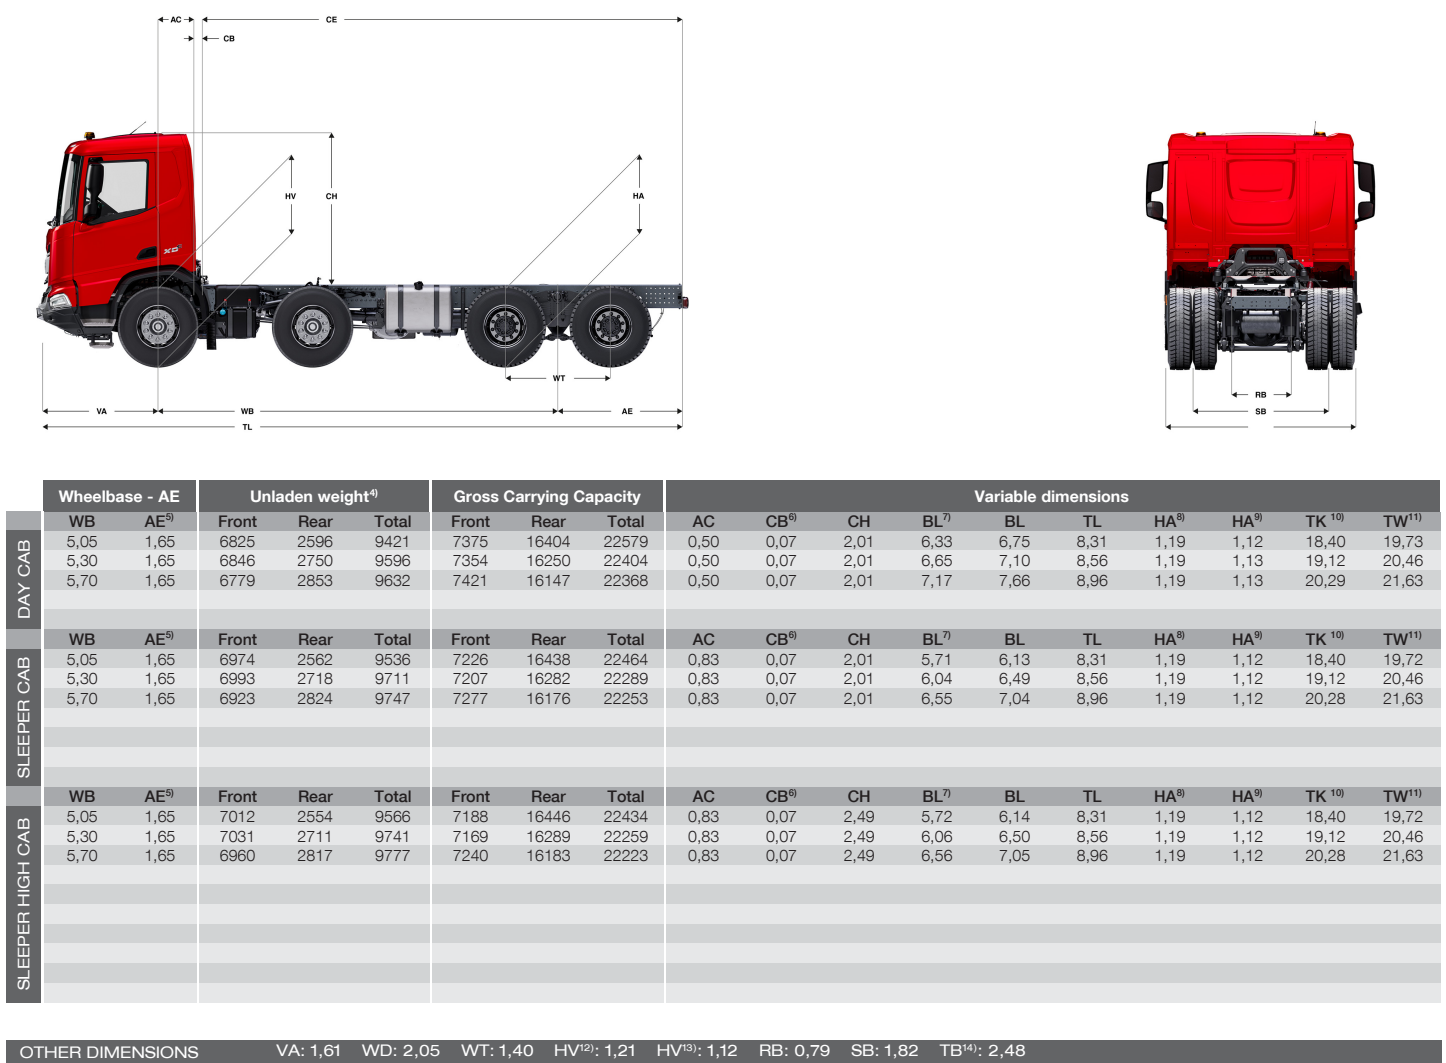

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).

9) Laden height at centre of driven axle(s).

10) TK = turning circle between kerbs.

11) TW = turning circle between walls.

12) Unladen height at centre of front axle(s).

13) Laden height at centre of front axle(s).

14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.