


Specification sheet

XF 410

FA 4X2 Rigid

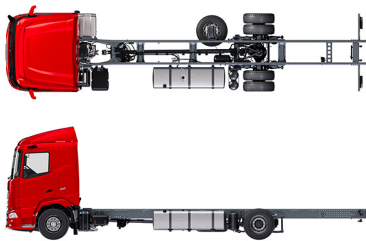

ENGINES

- XF NewGen 410 MX-11 (300 kW / 408 hp)
- XF NewGen 450 MX-11 (330 kW / 449 hp)
- XF NewGen 430 MX-13 (315 kW / 428 hp)
- XF NewGen 480 MX-13 (355 kW / 483 hp)
- XF NewGen 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

- 18000 kg
-
- Max. front 8000 kg
- Max. rear 11500 kg

GCM²⁾

- 44000 kg
-
-
-

016F0209AAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Sleeper Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2360 mm; cab width: 2500 mm. Number of cab steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

07017 Day Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
03358 External sun visor	07343 Kerb view window co-driver door
03922 Fog lights front	01550 No front view mirror
00936 Auxiliary LED lights on cab roof, prepared	01358 No DAF Digital Vision System
01836 LED Skylights	01913 DAF Corner View
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

03846 No roof air deflector	00082 Adj. roof air deflector for Day Cab
00008 Adj. roof air deflector short Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab
01902 Adj. rf air defl. long low >4m(!) XF Sl. High Cab	04906 Side collars, one side hinged
00124 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	03074 Side collars, both sides hinged
01538 Adj. roof air defl. long high >4m(!) Sleeper High	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; Auxiliary cab heater (water).

Optional

07310 Steering wheel, black	04070 Two drawers
02355 Steering wheel, leather	03954 Refrigerator
02146 Dashboard finish: Plateau	04050 Refrigerator and drawer
02353 Cab interior decoration: Argenta	04069 Two refrigerators
02350 Cab interior decoration: Natura	31364 Without feature: Lower bunk mattress
07733 Driver seat: Luxury Air	02854 Xtra Comfort mattress for lower bunk
07736 Driver seat: Super Air	01775 Xtra Comfort mattress with topper for lower bunk
07737 Driver seat: Xtra Leather Air	06970 Automatic Cab Climate Control
02117 Third seat	01967 Park air conditioning, integrated
03948 Single drawer	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	03684 Infotainment including DAF Truck Navigation
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADP
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist
03628 DAF drowsiness & distraction detection	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344.

Optional

06257 Front axle load 9.00 t	04588 Rear axle SR1347
04647 Front springs air	01603 Rear springs parabolic
04057 Rear axle HR1356	08191 Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2010 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

07110 Eco performance	08371 Long Combination Vehicle (LCV)
02314 Gearbox overdrive	09638 Off-road applications
07101 Standard transport, Lite version	01498 Off-road applications with Rock-free function
09636 Heavy haulage	02843 Mechanical differential lock
09637 Liquid transport	

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02715 ZF Intarder	04901 Spring brake cylinders on the first front axle
01572 Park brake control electro-pneumatic	00929 Driven rear axle with drum brakes
01497 Park brake control pneumatic with spoken warning	

CHASSIS

Wheelbase 4.70 m / rear overhang 2.05 m; Side member height 260 mm; Standard component location; 620 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

- | | | | |
|--------------|--------------------------------|--------------|-------------------------------------|
| 02601 | Side member height 310 mm | 07071 | Spare wheel carrier right-hand side |
| 16157 | Fuel tanks, material and sizes | 03323 | Rear light with LEDs |

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

- | | | | |
|--------------|-------------------------------------|--------------|-------------------------------------|
| 07033 | Trailer coupling Ringfeder D=13.7 B | 08027 | Trailer coupling Rockinger D=20.0 B |
| 07034 | Trailer coupling Ringfeder D=20.0 B | 04659 | Trailer cable EBS |
| 08026 | Trailer coupling Rockinger D=13.0 B | | |

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

- | | | | |
|--------------|-----------------------------------|--------------|-----------------------|
| 02729 | Application connector Plug & Play | 08121 | Tail lift application |
| 09421 | Additional spare wiring | | |

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

Optional

- | | | | |
|--------------|------------------|--------------|------------------------------|
| 04492 | Alternator 130 A | 07671 | Batteries 2x210Ah AGM C-type |
| 08775 | Alternator 150 A | 06440 | Batteries 2x230Ah |

GVM AND GCM

Chassis weight related technical GVM max 20500 kg; Driveline related max GCM 44000 kg class 2.

Optional

- | | | | |
|--------------|--|--------------|--|
| 03675 | Driveline related max GCM 50000 kg class 3 | 00818 | Driveline related max GCM 60000 kg class 3 |
| 00939 | Driveline related max GCM 56000 kg class 2 | 02893 | Driveline related max GCM 64000 kg class 2 |

APPLICATION CONDITIONS

Air intake front.

Optional

- | | | | |
|--------------|--------------------------|--------------|--------------------------------------|
| 08400 | Silent mode | 06614 | Anti-dust blow-up shield |
| 02260 | Extra cab insulation | 06620 | Anti-dust blow-up shield + bugscreen |
| 03648 | Cyclonic air intake high | | |

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

- 07569** Lifting jack


OPTION PACKAGES

Optional

- | | | | |
|--------------|----------------------|--------------|--------------|
| 17448 | Safety pack | 17625 | Climate Pack |
| 17595 | Executive Pack XD/XF | | |

XF 410

FA 4X2 Rigid

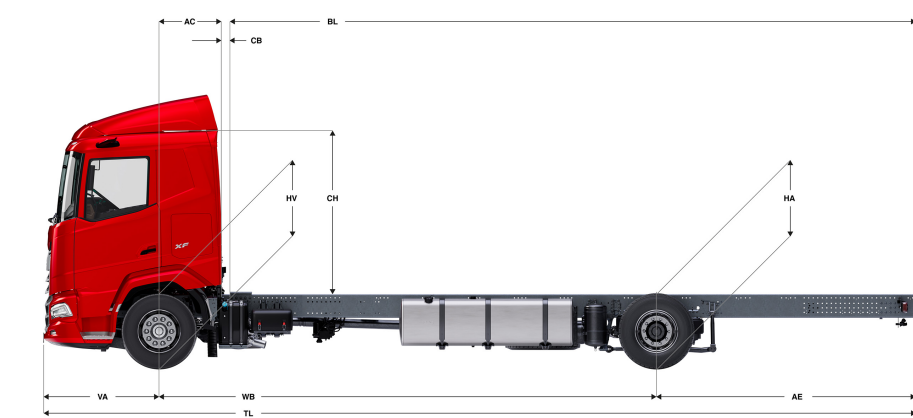																		
Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions										
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾	
DAY CAB	3,80	1,30	4905	1850	6756	3095	9650	11244	0,50	0,07	2,99	4,75	5,02	6,63	0,97	0,94	13,50	14,88
	4,00	1,70	4860	1946	6806	3140	9554	11194	0,50	0,07	2,99	5,03	5,31	7,23	0,97	0,94	14,01	15,41
	4,20	1,80	4863	1973	6836	3137	9527	11164	0,50	0,07	2,99	5,34	5,63	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	4870	2019	6889	3130	9481	11111	0,50	0,07	2,99	5,79	6,11	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	4961	2190	7151	3039	9310	10849	0,50	0,07	2,99	6,12	6,47	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	4947	2229	7176	3053	9271	10824	0,50	0,07	2,99	6,42	6,78	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	4993	2379	7371	3007	9121	10629	0,50	0,07	2,99	6,73	7,10	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	5002	2389	7391	2998	9111	10609	0,50	0,07	2,99	7,20	7,59	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	5008	2411	7418	2992	9089	10582	0,50	0,07	2,99	7,66	8,08	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	5022	2472	7494	2978	9028	10506	0,50	0,07	2,99	8,27	8,72	10,43	0,97	0,94	19,49	20,96
SLEEPER CAB	6,60	3,45	4962	2481	7443	3038	9019	10557	0,50	0,07	2,94	9,00	9,49	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	4966	2499	7465	3034	9001	10535	0,50	0,07	2,94	9,47	9,96	11,93	1,02	0,99	21,59	23,07
	3,80	1,30	5036	1845	6881	2964	9655	11119	0,83	0,07	2,99	4,15	4,42	6,63	0,97	0,94	13,50	14,88
	4,00	1,70	4990	1941	6931	3010	9559	11069	0,83	0,07	2,99	4,43	4,72	7,23	0,97	0,94	14,01	15,41
	4,20	1,80	4993	1968	6961	3007	9532	11039	0,83	0,07	2,99	4,74	5,04	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	5000	2015	7014	3000	9485	10986	0,83	0,07	2,99	5,20	5,52	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	5090	2186	7276	2910	9314	10724	0,83	0,07	2,99	5,54	5,88	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	5076	2225	7302	2924	9275	10698	0,83	0,07	2,99	5,84	6,19	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	5122	2375	7497	2878	9125	10503	0,83	0,07	2,99	6,15	6,53	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	5131	2386	7517	2869	9114	10483	0,83	0,07	2,99	6,63	7,03	9,58	0,97	0,94	17,66	19,11
SLEEPER HIGH CAB	5,70	2,65	5136	2408	7544	2864	9092	10456	0,83	0,07	2,99	7,08	7,52	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	5150	2469	7619	2850	9031	10381	0,83	0,07	2,99	7,70	8,17	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	5092	2479	7570	2908	9021	10430	0,83	0,07	2,94	8,44	8,94	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	5096	2497	7593	2904	9003	10407	0,83	0,07	2,94	8,90	9,41	11,93	1,02	0,99	21,59	23,07
	3,80	1,30	5008	1841	6848	2992	9659	11152	0,83	0,07	2,85	4,14	4,41	6,63	0,97	0,94	13,50	14,88
	4,00	1,70	4962	1936	6898	3038	9564	11102	0,83	0,07	2,85	4,42	4,70	7,23	0,97	0,94	14,01	15,41
	4,20	1,80	4965	1963	6928	3035	9537	11072	0,83	0,07	2,85	4,73	5,02	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	4971	2010	6981	3029	9490	11019	0,83	0,07	2,85	5,19	5,51	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	5062	2181	7243	2938	9319	10757	0,83	0,07	2,85	5,53	5,87	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	5048	2221	7269	2952	9279	10731	0,83	0,07	2,85	5,82	6,18	8,78	0,97	0,94	16,35	17,79
SLEEPER HIGH CAB	5,10	2,75	5093	2370	7464	2907	9130	10536	0,83	0,07	2,85	6,14	6,51	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	5102	2381	7484	2898	9119	10516	0,83	0,07	2,85	6,60	7,00	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	5108	2403	7511	2892	9097	10489	0,83	0,07	2,85	7,07	7,49	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	5122	2464	7586	2878	9036	10414	0,83	0,07	2,85	7,69	8,15	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	5064	2474	7537	2936	9026	10463	0,83	0,07	2,80	8,43	8,90	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	5068	2492	7560	2932	9008	10440	0,83	0,07	2,80	8,88	9,40	11,93	1,02	0,99	21,59	23,07

OTHER DIMENSIONS	VA: 1,53	HV ¹³⁾ : 0,97	HV ¹⁴⁾ : 0,91	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,48
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 620 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

A PACCAR COMPANY

DRIVEN BY QUALITY

DAF

016F0209AAAA - 202545A - 10-07-2025