


Specification sheet

XF 410

FAN 6X2 Rigid

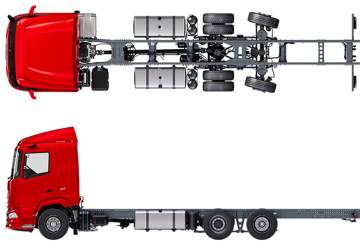

016F0229NAAA - 202545A - 10-07-2025

ENGINES
XF NewGen 370 MX-11 (270 kW / 367 hp)
XF NewGen 410 MX-11 (300 kW / 408 hp)
XF NewGen 450 MX-11 (330 kW / 449 hp)
XF NewGen 430 MX-13 (315 kW / 428 hp)
XF NewGen 480 MX-13 (355 kW / 483 hp)
XF NewGen 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
26000 kg	44000 kg
Max. front 8000 kg	
Max. rear 19000 kg	

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Sleeper Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2360 mm; cab width: 2500 mm. Number of cab steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

07017 Day Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
03358 External sun visor	07343 Kerb view window co-driver door
03922 Fog lights front	01550 No front view mirror
00936 Auxiliary LED lights on cab roof, prepared	01358 No DAF Digital Vision System
01836 LED Skylights	01913 DAF Corner View
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

03846 No roof air deflector	00082 Adj. roof air deflector for Day Cab
00008 Adj. roof air deflector short Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab
01902 Adj. rf air defl. long low >4m(!) XF Sl. High Cab	04906 Side collars, one side hinged
00124 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	03074 Side collars, both sides hinged
01538 Adj. roof air defl. long high >4m(!) Sleeper High	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; Auxiliary cab heater (water).

Optional

07310 Steering wheel, black	04070 Two drawers
02355 Steering wheel, leather	03954 Refrigerator
02146 Dashboard finish: Plateau	04050 Refrigerator and drawer
02353 Cab interior decoration: Argenta	04069 Two refrigerators
02350 Cab interior decoration: Natura	31364 Without feature: Lower bunk mattress
07733 Driver seat: Luxury Air	02854 Xtra Comfort mattress for lower bunk
07736 Driver seat: Super Air	01775 Xtra Comfort mattress with topper for lower bunk
07737 Driver seat: Xtra Leather Air	06970 Automatic Cab Climate Control
02117 Third seat	01967 Park air conditioning, integrated
03948 Single drawer	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	03684 Infotainment including DAF Truck Navigation
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	06410 Safe Load Pass preparation
02569 No Driver State Monitoring	00795 Safety regulations EC ADR
03628 DAF drowsiness & distraction detection	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

Optional

06257 Front axle load 9.00 t	04057 Rear axle HR1356
06095 Front axle load 10.00 t	04588 Rear axle SR1347
04647 Front springs air	08191 Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P; R2,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2010 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

07110 Eco performance	08371 Long Combination Vehicle (LCV)
02314 Gearbox overdrive	09638 Off-road applications
07101 Standard transport, Lite version	01498 Off-road applications with Rock-free function
09636 Heavy haulage	02843 Mechanical differential lock
09637 Liquid transport	

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02715 ZF Intarder	04901 Spring brake cylinders on the first front axle
01572 Park brake control electro-pneumatic	00929 Driven rear axle with drum brakes
01497 Park brake control pneumatic with spoken warning	

CHASSIS

Wheelbase 4.40 m / rear overhang 2.55 m; Side member height 260 mm; Standard component location; 430 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
08641 Air tanks aluminium	03323 Rear light with LEDs
16157 Fuel tanks, material and sizes	

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

07033 Trailer coupling Ringfeder D=13.7 B	08027 Trailer coupling Rockinger D=20.0 B
07034 Trailer coupling Ringfeder D=20.0 B	04659 Trailer cable EBS
08026 Trailer coupling Rockinger D=13.0 B	

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

02729 Application connector Plug & Play	09208 Chassis preparation for BDF Multi system
09421 Additional spare wiring	08121 Tail lift application
09201 Chassis preparation for BDF	

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 175 Ah..

Optional

08775 Alternator 150 A	06440 Batteries 2x230Ah
07671 Batteries 2x210Ah AGM C-type	

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 44000 kg class 2.

Optional

00200 Driveline related max GCM 38000 kg class 2	00939 Driveline related max GCM 56000 kg class 2
00209 Driveline related max GCM 40000 kg class 3	00818 Driveline related max GCM 60000 kg class 3
03675 Driveline related max GCM 50000 kg class 3	02893 Driveline related max GCM 64000 kg class 2

APPLICATION CONDITIONS

Air intake front.

Optional

08400 Silent mode	03425 Cyclonic air intake high behind the cab (HD)
02260 Extra cab insulation	06614 Anti-dust blow-up shield
03648 Cyclonic air intake high	06620 Anti-dust blow-up shield + bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended
--

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES


Optional

17448 Safety pack	17625 Climate Pack
17595 Executive Pack XD/XF	

Go to **DAF.com** to configure your own perfect DAF.

XF 410

FAN 6X2 Rigid

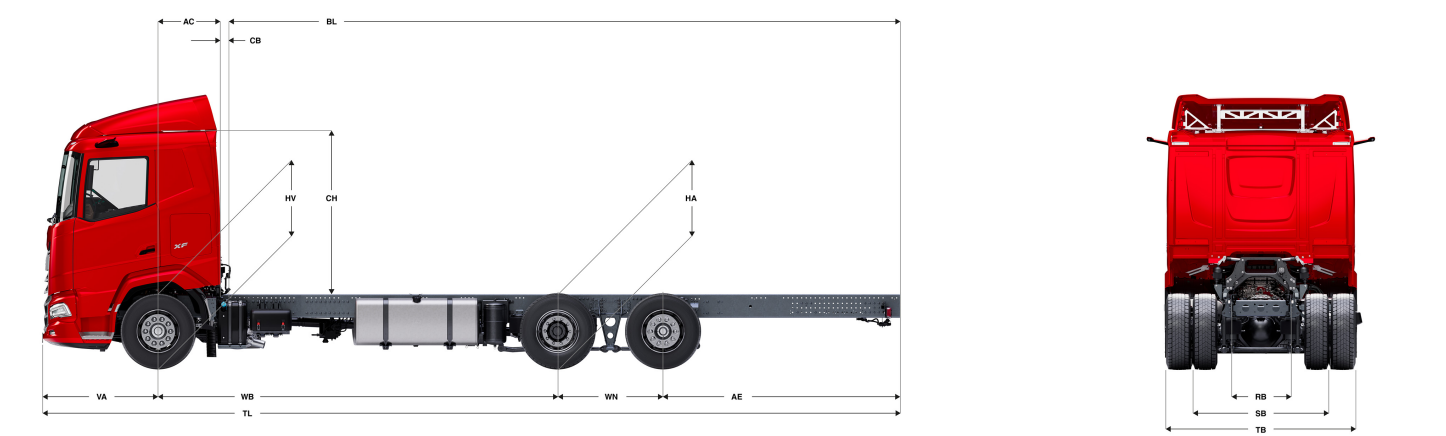

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ²⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	3,80	2,05	4769	3263	8032	3231	15737	17968	0,50	0,07	2,99	6,06	6,06	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	4849	3495	8344	3151	15505	17656	0,50	0,25	2,94	6,04	6,04	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4800	3390	8190	3200	15610	17810	0,50	0,07	2,99	6,72	6,72	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4802	3431	8233	3198	15569	17767	0,50	0,07	2,99	7,04	7,04	9,88	0,97	0,94	15,05	16,46
	4,60	2,75	4834	3569	8403	3166	15431	17597	0,50	0,07	2,99	7,37	7,37	10,28	0,97	0,94	15,57	16,99
	4,80	2,70	4842	3575	8417	3158	15425	17583	0,50	0,07	2,99	7,70	7,70	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4835	3622	8457	3165	15378	17543	0,50	0,07	2,99	8,12	8,12	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4811	3638	8450	3189	15362	17550	0,50	0,07	2,99	8,51	8,51	11,38	0,97	0,94	17,40	18,84
5,60	3,15	4791	3594	8384	3209	15406	17616	0,50	0,07	2,94	9,00	9,00	11,68	1,02	0,99	18,18	19,64	
6,10	2,90	4910	3777	8687	3090	15223	17313	0,50	0,07	2,94	9,88	9,88	11,93	1,02	0,99	19,49	20,96	
SLEEPER CAB	WB	AE ³⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	3,80	2,05	4899	3258	8157	3101	15742	17843	0,83	0,07	2,99	5,44	5,44	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	4985	3491	8476	3015	15509	17524	0,83	0,25	2,94	5,44	5,44	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4929	3386	8315	3071	15614	17685	0,83	0,07	2,99	6,11	6,11	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4931	3427	8358	3069	15573	17642	0,83	0,07	2,99	6,44	6,44	9,88	0,97	0,94	15,05	16,46
	4,60	2,75	4963	3565	8528	3037	15435	17472	0,83	0,07	2,99	6,77	6,77	10,28	0,97	0,94	15,57	16,99
	4,80	2,70	4971	3572	8542	3029	15428	17458	0,83	0,07	2,99	7,11	7,11	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4964	3619	8582	3036	15381	17418	0,83	0,07	2,99	7,53	7,53	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4940	3635	8575	3060	15365	17425	0,83	0,07	2,99	7,92	7,92	11,38	0,97	0,94	17,40	18,84
5,60	3,15	4919	3591	8510	3081	15409	17490	0,83	0,07	2,94	8,41	8,41	11,68	1,02	0,99	18,18	19,64	
6,10	2,90	5038	3775	8813	2962	15225	17187	0,83	0,07	2,94	9,30	9,30	11,93	1,02	0,99	19,49	20,96	
SLEEPER HIGH CAB	WB	AE ³⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	3,80	2,05	4870	3254	8124	3130	15746	17876	0,83	0,07	2,85	5,43	5,43	8,78	0,97	0,94	13,50	14,88
	4,00	2,40	4956	3487	8443	3044	15513	17557	0,83	0,25	2,80	5,42	5,42	9,33	1,02	0,99	14,01	15,41
	4,20	2,40	4900	3382	8282	3100	15618	17718	0,83	0,07	2,85	6,10	6,10	9,53	0,97	0,94	14,53	15,94
	4,40	2,55	4902	3423	8325	3098	15577	17675	0,83	0,07	2,85	6,43	6,43	9,88	0,97	0,94	15,05	16,46
	4,60	2,75	4934	3561	8495	3066	15439	17505	0,83	0,07	2,85	6,76	6,76	10,28	0,97	0,94	15,57	16,99
	4,80	2,70	4942	3567	8509	3058	15433	17491	0,83	0,07	2,85	7,10	7,10	10,43	0,97	0,94	16,09	17,52
	5,05	2,90	4935	3615	8549	3065	15385	17451	0,83	0,07	2,85	7,51	7,51	10,88	0,97	0,94	16,74	18,18
	5,30	3,15	4911	3631	8542	3089	15369	17458	0,83	0,07	2,85	7,90	7,90	11,38	0,97	0,94	17,40	18,84
5,60	3,15	4890	3587	8477	3110	15413	17523	0,83	0,07	2,80	8,41	8,41	11,68	1,02	0,99	18,18	19,64	
6,10	2,90	5009	3770	8780	2991	15230	17220	0,83	0,07	2,80	9,28	9,28	11,93	1,02	0,99	19,49	20,96	

OTHER DIMENSIONS	VA: 1,53	WN: 1,40	HV ¹²⁾ : 0,97	HV ¹³⁾ : 0,94	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 430 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
8) Unladen height at centre of driven axle (trailing axle down).
9) Laden height at centre of driven axle(s).
10) TK = turning circle between kerbs.
11) TW = turning circle between walls.
12) Unladen height at centre of front axle(s).
13) Laden height at centre of front axle(s).
14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.