


Specification sheet

XF 410

FAD 8X4 Rigid



016F0279AAAA - 202545A - 10-07-2025

ENGINES
XF NewGen 370 MX-11 (270 kW / 367 hp)
XF NewGen 410 MX-11 (300 kW / 408 hp)
XF NewGen 450 MX-11 (330 kW / 449 hp)
XF NewGen 430 MX-13 (315 kW / 428 hp)
XF NewGen 480 MX-13 (355 kW / 483 hp)
XF NewGen 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
32000 kg	35500 kg
Max. front 16000 kg	
Max. rear 19000 kg	

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

07018 Sleeper Cab	01891 Hazard beacons on cab front, prepared
06244 Sleeper High Cab	06629 Two hazard beacon lights
07586 Chassis front execution: robust	03232 Front windscreen with solar control foil
03358 External sun visor	03317 Rear window: double glass
03922 Fog lights front	07343 Kerb view window co-driver door
00936 Auxiliary LED lights on cab roof, prepared	01550 No front view mirror
01836 LED Skylights	01362 DAF Digital Vision System
00949 LED Skylights; aux. LED lights on cab rf, prepared	01913 DAF Corner View
01925 Two LED work lamps for cab rear wall	

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00082 Adj. roof air deflector for Day Cab
01902 Adj. rf air defl. long low >4m(!) XF Sl. High Cab	00097 Adj. roof air deflector for Sleeper Cab
00124 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	04906 Side collars, one side hinged
01538 Adj. roof air defl. long high >4m(!) Sleeper High	03074 Side collars, both sides hinged

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; No arm rest driver seat; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	04070 Two drawers
02355 Steering wheel, leather	03954 Refrigerator
02146 Dashboard finish: Plateau	04050 Refrigerator and drawer
02353 Cab interior decoration: Argenta	04069 Two refrigerators
02350 Cab interior decoration: Natura	02838 Foam mattress for lower bunk
07733 Driver seat: Luxury Air	02854 Xtra Comfort mattress for lower bunk
07736 Driver seat: Super Air	01775 Xtra Comfort mattress with topper for lower bunk
07737 Driver seat: Xtra Leather Air	06970 Automatic Cab Climate Control
02117 Third seat	01967 Park air conditioning, integrated
03948 Single drawer	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control (ACC) with FCW; Driver Performance Assistant.

Optional

09681 Preparation for Maut	09908 Cruise control
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	08023 Adaptive Cruise Control with FCW and AEBS-3
03684 Infotainment including DAF Truck Navigation	06991 Predictive Cruise Control

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist
03628 DAF drowsiness & distraction detection	

SUSPENSION AND AXLES

Front: 2x 8.00 t, parabolic, 163N; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

Optional

03299 Front axles load 7.10 + 7.10 t	01372 Rear springs air
03280 Front axles load 7.50 + 7.50 t	04549 Rear axle load 10.50+ 10.50 t
06264 Front axles load 9.00 + 9.00 t	04563 Rear axle load 13.00+ 13.00 t
07494 Rear axle HR1670T	08191 Axle load monitoring
02788 Rear axle SR1360T	

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO EQMS 158/150 L Steering BBA 3P; R1,315/70R22.5GO EQMD 154/150 L Traction BBB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

Optional

07110 Eco performance	08371 Long Combination Vehicle (LCV)
02313 Gearbox direct drive	09638 Off-road applications
09636 Heavy haulage	01498 Off-road applications with Rock-free function
09637 Liquid transport	03720 No ASR

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02715 ZF Intarder	01497 Park brake control pneumatic with spoken warning
01572 Park brake control electro-pneumatic	00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box; Front underrun protection (FUP); Spray suppression.

Optional

- 16157** Fuel tanks, material and sizes
07070 Spare wheel carrier left-hand side
03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; No pneumatic trailer connection; Electric connection 24 V / 2x7 pins.

Optional

- 07033** Trailer coupling Ringfeder D=13.7 B
07034 Trailer coupling Ringfeder D=20.0 B
08026 Trailer coupling Rockinger D=13.0 B
08027 Trailer coupling Rockinger D=20.0 B
04659 Trailer cable EBS

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

- 02729** Application connector Plug & Play
09421 Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

Optional

- 04492** Alternator 130 A
08775 Alternator 150 A
01257 Batteries 2x140Ah
07671 Batteries 2x210Ah AGM C-type
06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

Optional

- 01208** Driveline related max GCM 35500 kg class 3
00200 Driveline related max GCM 38000 kg class 2
00209 Driveline related max GCM 40000 kg class 3
03673 Driveline related max GCM 44000 kg class 2
03675 Driveline related max GCM 50000 kg class 3
00778 Driveline related max GCM 58000 kg class 2
07279 Driveline related max GCM 60000 kg class 2
00818 Driveline related max GCM 60000 kg class 3
00157 Driveline related max GCM 61000 kg class 2
06280 Driveline related max GCM 63000 kg class 2
01313 Driveline related max GCM 70000 kg class 2
02135 Driveline related max GCM 71000 kg class 2
02143 Driveline related max GCM 78000 kg class 2

APPLICATION CONDITIONS

Air intake front.

Optional

- 02260** Extra cab insulation
03648 Cyclonic air intake high
03425 Cyclonic air intake high behind the cab (HD)
06614 Anti-dust blow-up shield
06620 Anti-dust blow-up shield + bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

- 07569** Lifting jack


OPTION PACKAGES

Optional

- 17448** Safety pack
17595 Executive Pack XD/XF
17625 Climate Pack

Go to **DAF.com** to configure your own perfect DAF.

FAD 8X4 Rigid

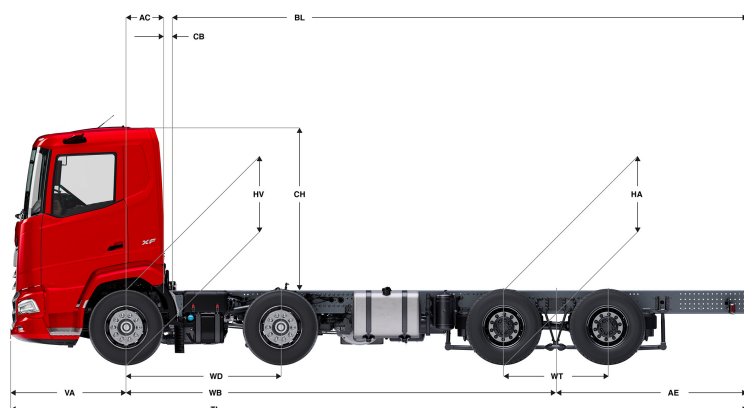

	Wheelbase - AE		Unladen weight ⁽⁴⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁽⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁽⁶⁾	CH	BL ⁽⁷⁾	BL	TL	HA ⁽⁸⁾	HA ⁽⁹⁾	TK ⁽¹⁰⁾	TW ⁽¹¹⁾
	5,05	1,65	6842	3106	9948	9158	15894	22052	0,50	0,07	2,18	6,03	6,65	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	6889	3268	10157	9111	15732	21843	0,50	0,07	2,18	6,34	7,01	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6812	2835	9648	9188	16165	22352	0,50	0,07	2,18	6,42	7,67	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6699	3069	9767	9301	15931	22233	0,50	0,07	2,18	7,17	8,61	10,08	1,16	1,09	22,32	23,65
SLEEPER CAB	WB	AE ⁽⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁽⁶⁾	CH	BL ⁽⁷⁾	BL	TL	HA ⁽⁸⁾	HA ⁽⁹⁾	TK ⁽¹⁰⁾	TW ⁽¹¹⁾
	5,05	1,65	6987	3072	10059	9013	15928	21941	0,83	0,07	2,18	5,40	6,03	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	7032	3236	10268	8968	15764	21732	0,83	0,07	2,18	5,70	6,38	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6953	2806	9759	9047	16194	22241	0,83	0,07	2,18	5,80	7,05	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6835	3043	9879	9165	15957	22121	0,83	0,07	2,18	6,55	7,99	10,08	1,16	1,09	22,32	23,65
SLEEPER HIGH CAB	WB	AE ⁽⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁽⁶⁾	CH	BL ⁽⁷⁾	BL	TL	HA ⁽⁸⁾	HA ⁽⁹⁾	TK ⁽¹⁰⁾	TW ⁽¹¹⁾
	5,05	1,65	7028	3062	10090	8972	15938	21910	0,83	0,07	2,66	5,41	6,04	8,23	1,14	1,08	18,39	19,70
	5,30	1,65	7072	3228	10300	8928	15772	21700	0,83	0,07	2,66	5,72	6,40	8,48	1,14	1,08	19,12	20,43
	5,70	1,65	6992	2798	9790	9008	16202	22210	0,83	0,07	2,66	5,81	7,06	8,88	1,16	1,09	20,28	21,60
	6,40	2,15	6873	3036	9909	9127	15964	22091	0,83	0,07	2,66	6,57	8,01	10,08	1,16	1,09	22,32	23,65

OTHER DIMENSIONS	VA: 1,53	WD: 2,05	WT: 1,40	HV ¹²⁾ : 1,06	HV ¹³⁾ : 0,97	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.