Specification sheet

XF 410

FTT 6X4 Tractor







ENGINES
XF NewGen 370 MX-11 (270 kW / 367 hp)
XF NewGen 410 MX-11 (300 kW / 408 hp)
XF NewGen 450 MX-11 (330 kW / 449 hp)
XF NewGen 430 MX-13 (315 kW / 428 hp)
XF NewGen 480 MX-13 (355 kW / 483 hp)
XF NewGen 530 MX-13 (390 kW / 530 hp)

GVM[1)]	GCM[2)]
26000 kg	44000 kg
Max. front 8000 kg	
Max. rear 19000 kg	

016G0249AAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Sleeper Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2360 mm; cab width: 2500 mm. Number of cab steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

07017 Day Cab
06244 Sleeper High Cab
02889 Chassis front execution: no bottom plate
02952 Chassis front execution: bottom plate aero
07586 Chassis front execution: robust
03358 External sun visor
06790 Aluminium ladder 1-piece
06791 Aluminium ladder 2-piece
03922 Fog lights front
00936 Auxiliary LED lights on cab roof, prepared
01836 LED Skylights
00949 LED Skylights; aux. LED lights on cab rf, prepared
01925 Two LED work lamps for cab rear wall
01891 Hazard beacons on cab front, prepared
06629 Two hazard beacon lights
03232 Front windscreen with solar control foil
03317 Rear window: double glass
07343 Kerb view window co-driver door
01550 No front view mirror
01362 DAF Digital Vision System
01913 DAF Corner View

AERODYNAMICS

Optional

00010 Adj. roof air deflector short Sleeper High Cab
01904 Adj. rf air defl. long low >4m(!) XF Sl. High Cab
00138 Adj. rf air defl.long mid >4m(!) Sleeper High Cab
01552 Adj. roof air defl. long high >4m(!) Sleeper High
00094 Adj. roof air deflector for Day Cab
00118 Adj. roof air deflector for Sleeper Cab
00021 Adj. roof air deflector long low Sleeper High Cab
04906 Side collars, one side hinged
03074 Side collars, both sides hinged

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; Auxiliary cab heater (water).

Optional

07310 Steering wheel, black
02355 Steering wheel, leather
02146 Dashboard finish: Plateau
02353 Cab interior decoration: Argenta
02350 Cab interior decoration: Natura
07733 Driver seat: Luxury Air
07736 Driver seat: Super Air
07737 Driver seat: Xtra Leather Air
02117 Third seat
03948 Single drawer
04070 Two drawers
03954 Refrigerator
04050 Refrigerator and drawer
04069 Two refrigerators
31364 Without feature: Lower bunk mattress
02854 Xtra Comfort mattress for lower bunk
01775 Xtra Comfort mattress with topper for lower bunk
01177 Luggage carrier
01066 Upper bunk
06970 Automatic Cab Climate Control
01967 Park air conditioning, integrated

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut
03470 Infotainment incl. DAF Truck Nav. and tablet prep.
03684 Infotainment including DAF Truck Navigation
16161 No audio equipment, makes and types
06991 Predictive Cruise Control

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners
02178 Main switch with second control in the cab
02569 No Driver State Monitoring
03628 DAF drowsiness & distraction detection
00795 Safety regulations EC ADR
01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 10.50+10.50 t; Rear: 21.00 t, air suspension, SR1360T; No lifting device.

Optional

06257 Front axle load 9.00 t
06095 Front axle load 10.00 t
07494 Rear axle HR1670T
01601 Rear springs trapezium
04563 Rear axle load 13.00+ 13.00 t
08191 Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO EQMS 158/150 L Steering BBA 3P; R1,315/70R22.5GO EQMD 154/150 L Traction BBB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2010 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.83; ASR.

Optional

07110 Eco performance
02314 Gearbox overdrive
09636 Heavy haulage
09637 Liquid transport
08371 Long Combination Vehicle (LCV)
09638 Off-road applications
01498 Off-road applications with Rock-free function

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air h eated dryer..

Optional

02715 ZF Intarder
01572 Park brake control electro -pneumatic
01497 Park brake control pneumatic with spoken warning

016G0249AAAA - 202545A - 10-07-2025

CHASSIS

Wheelbase 3.90 m / rear overhang 1.65 m; Side member height 310 mm; 510 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 80 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

Optional

16157 Fuel tanks, material and sizes

03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

JOST JSK37C cast iron 150+40mm; No lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

03178 Towing hook D= 4.3

16151 5th wheel makes and heights

BODIES AND PREPARATIONS FOR BODYING

Optional

02811 Tail lift connection Anderson

02812 Tail lift connection REMA

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

Optional

04492 Alternator 130 A

08775 Alternator 150 A

01257 Batteries 2x140Ah

07671 Batteries 2x210Ah AGM C-type

06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 60000 kg class 2.

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation

03648 Cyclonic air intake high

06614 Anti-dust blow-up shield

06620 Anti-dust blow-up shield + bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES

Optional

17448 Safety pack

17595 Executive Pack XD/XF


17625 Climate Pack


Go to DAF.com to configure your own perfect DAF.

016G0249AAAA - 202545A - 10-07-2025

XF 410

FTT 6X4 Tractor

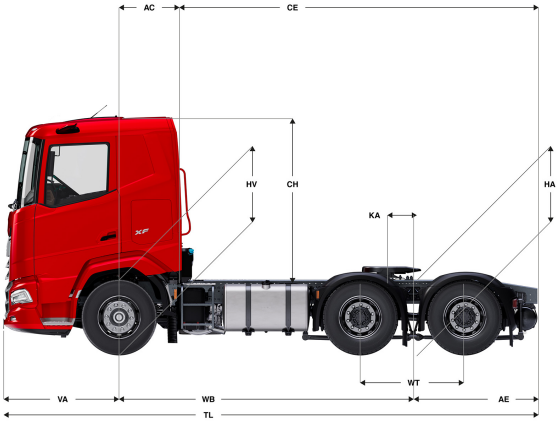



	Wheelbase - AE		Unladen weight[4]			Gross Carrying Capacity			Variable dimensions								
	WB	AE[5]	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA[6]	TL	HA[7]	HA[8]	TK[9]	TW[10]
DAY CAB	3,90	1,65	5020	4164	9184	2980	14836	16816	0,50	5,05	2,18	0,37	7,08	1,03	1,00	13,76	15,14
	WB	AE[5]	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA[6]	TL	HA[7]	HA[8]	TK[9]	TW[10]
SLEEPER CAB	3,90	1,65	5154	4160	9314	2846	14840	16686	0,83	4,72	2,18	0,37	7,08	1,03	1,00	13,76	15,14
	4,55	1,65	5118	4181	9300	2882	14819	16700	0,83	5,37	2,18	0,37	7,73	1,03	1,01	15,44	16,86
	WB	AE[5]	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA[6]	TL	HA[7]	HA[8]	TK[9]	TW[10]
SLEEPER HIGH CAB	3,90	1,65	5184	4160	9344	2816	14840	16656	0,83	4,72	2,66	0,37	7,08	1,03	1,00	13,76	15,14
	4,55	1,65	5149	4181	9330	2851	14819	16670	0,83	5,37	2,66	0,37	7,73	1,03	1,01	15,44	16,86

OTHER DIMENSIONS	VA: 1,53	WT: 1,40	HV[11]: 1,02	HV[12]: 0,97	RB: 0,79	SB: 1,82	TB[13]: 2,48

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 510 litres of fuel, 80 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB.
6) Calculate customer specific KA with TOPEC.
7) Unladen height at centre of driven axle(s).
8) Laden height at centre of driven axle(s).
9) TK = turning circle between kerbs.
10) TW = turning circle between walls.
11) Unladen height at centre of front axle(s).
12) Laden height at centre of front axle(s).
13) TB is overall width at rear. (At centre of front axle 255).

016G0249AAAA - 202545A - 10-07-2025

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.