

Specification sheet

XG⁺ 450

FT 4X2 Tractor



ENGINES

- XG+ NewGen 450 MX-11 (330 kW / 449 hp)
- XG+ NewGen 430 MX-13 (315 kW / 428 hp)
- XG+ NewGen 480 MX-13 (355 kW / 483 hp)
- XG+ NewGen 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

- 18000 kg
-
- Max. front 8000 kg
- Max. rear 11500 kg

GCM²⁾

44000 kg

016G0309ABAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious cab for XG+ series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides, and the large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension air; LED head, cornering and fog lights; Front view mirror.

Optional

02941	Chassis front execution: bottom plate	01891	Hazard beacons on cab front, prepared
02889	Chassis front execution: no bottom plate	06629	Two hazard beacon lights
03358	External sun visor	03232	Front windscreen with solar control foil
06790	Aluminium ladder 1-piece	01550	No front view mirror
06791	Aluminium ladder 2-piece	01358	No DAF Digital Vision System
01015	LED Skylights; aux. LED lights on cab rf, prepared	01913	DAF Corner View
01925	Two LED work lamps for cab rear wall		

AERODYNAMICS

Optional

01583	Adj. roof air deflector; over 4 m (!) for XG+ cab	04140	No side skirts
04905	No side collars	01110	No side skirts
04906	Side collars, one side hinged	01126	Side skirts with bottom extensions
03074	Side collars, both sides hinged	01127	Side skirts with top extensions
03076	Side collars, extended. Both sides hinged	01135	Side skirts with extensions at top and bottom

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Argenta; Driver seat: Luxury Air; Arm rest at both sides of the driver seat; Co-driver seat: cinema + table; fabric cover; Dashboard table; Storage compartment with drawer in centre; Upper bunk; Automatic Cab Climate Control; Auxiliary cab heater (water); Roof hatch, electric control.

Optional

02043	Dashboard finish: Vision	02854	Xtra Comfort mattress for lower bunk
02350	Cab interior decoration: Natura	02858	Xtra Comfort mattress for adjustable lower bunk
07736	Driver seat: Super Air	01775	Xtra Comfort mattress with topper for lower bunk
07737	Driver seat: Xtra Leather Air	02380	Mattress for DAF Relax Bed
02241	Driver seat, swivel base	04150	Mattress with topper for DAF Relax Bed
04050	Refrigerator and drawer	01967	Park air conditioning, integrated
04069	Two refrigerators		

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control with FCW and AEB-3; Driver Performance Assistant.

Optional

09681	Preparation for Maut	03684	Infotainment including DAF Truck Navigation
03470	Infotainment incl. DAF Truck Nav. and tablet prep.		

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	03628	DAF drowsiness & distraction detection
02178	Main switch with second control in the cab	00795	Safety regulations EC ADR
02569	No Driver State Monitoring	01952	No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344.

Optional

01769	Front axle load 7.50 t	04057	Rear axle HR1356
06257	Front axle load 9.00 t	04588	Rear axle SR1347
04647	Front springs air	08191	Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P.

Optional

16152	Tyre makes and types
--------------	----------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

Optional

07110	Eco performance	08371	Long Combination Vehicle (LCV)
02314	Gearbox overdrive	09638	Off-road applications
07101	Standard transport, Lite version	01498	Off-road applications with Rock-free function
09636	Heavy haulage	02843	Mechanical differential lock
09637	Liquid transport		

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02287	Exhaust brake	01572	Park brake control electro-pneumatic
02281	ZF Intarder	01497	Park brake control pneumatic with spoken warning
02304	MX Engine Brake and ZF Intarder	04901	Spring brake cylinders on the first front axle
02715	ZF Intarder		

CHASSIS

Wheelbase 4.00 m / rear overhang 0.99 m; Side member height 260 mm; Standard component location; 765 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

Optional

- | | |
|--|--|
| 02883 Component-free right-hand side, 1900 mm | 07071 Spare wheel carrier right-hand side |
| 16157 Fuel tanks, material and sizes | 03322 Rear light with bulbs |

DRAWBAR AND TRAILER EQUIPMENT

JOST JSK36DV pressed steel 205+40mm; Lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

- | | |
|---------------------------------|--|
| 03178 Towing hook D= 4.3 | 16151 5th wheel makes and heights |
|---------------------------------|--|

BODIES AND PREPARATIONS FOR BODYING

Optional

- | | |
|--|--|
| 02811 Tail lift connection Anderson | 02812 Tail lift connection REMA |
|--|--|

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 210 Ah AGM..

Optional

- | | |
|-------------------------------|--------------------------------|
| 04873 Alternator 110 A | 06440 Batteries 2x230Ah |
| 08775 Alternator 150 A | |

GVM AND GCM

Chassis weight related technical GVM max 20500 kg; Driveline related max GCM 44000 kg class 2.

APPLICATION CONDITIONS

Air intake front.

Optional

- | | |
|---------------------------------------|---|
| 08400 Silent mode | 06620 Anti-dust blow-up shield + bugscreen |
| 06614 Anti-dust blow-up shield | |

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

- 07569** Lifting jack

OPTION PACKAGES


Optional

- | | |
|------------------------------------|---------------------------|
| 17448 Safety pack | 17625 Climate Pack |
| 17596 Executive Pack XG/XG+ | |

Go to **DAF.com** to configure your own perfect DAF.

XG⁺ 450

FT 4X2 Tractor

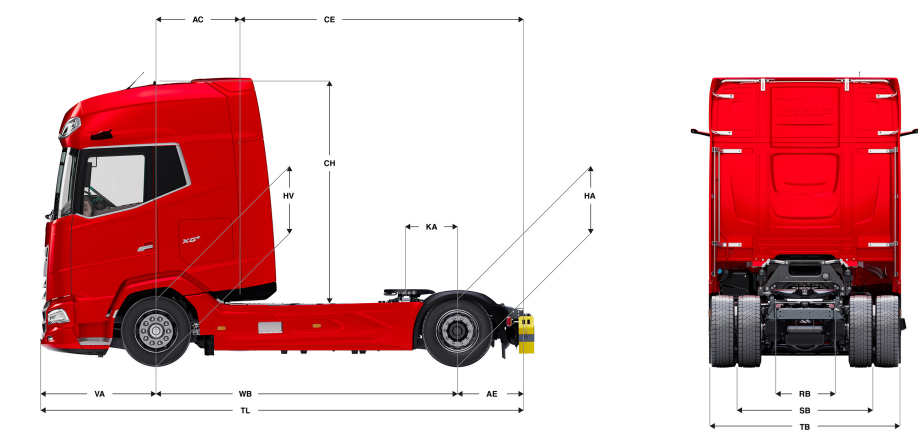

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions								
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA ⁶⁾	TL	HA ⁷⁾	HA ⁸⁾	TK ⁹⁾	TW ¹⁰⁾
XG+ CAB	4,00	0,99	5422	2443	7865	2578	9057	10135	1,16	3,83	3,00	0,62	6,52	0,97	0,94	14,01	15,41

OTHER DIMENSIONS	VA: 1,53	HV ¹¹⁾ : 0,95	HV ¹²⁾ : 0,90	RB: 0,79	SB: 1,82	TB ¹³⁾ : 2,48
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 765 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB.

6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).

8) Laden height at centre of driven axle(s).

9) TK = turning circle between kerbs.

10) TW = turning circle between walls.

11) Unladen height at centre of front axle(s).

12) Laden height at centre of front axle(s).

13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.