

Specification sheet

XG<sup>+</sup> 450

FTN 6X2 Tractor



ENGINES

- XG+ NewGen 450 MX-11 (330 kW / 449 hp)
- XG+ NewGen 430 MX-13 (315 kW / 428 hp)
- XG+ NewGen 480 MX-13 (355 kW / 483 hp)
- XG+ NewGen 530 MX-13 (390 kW / 530 hp)

GVM<sup>1)</sup>

- 26000 kg
- 
- Max. front 8000 kg
- Max. rear 19000 kg

GCM<sup>2)</sup>

44000 kg

016G0329NBAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Luxurious cab for XG+ series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides, and the large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension air; LED head, cornering and fog lights; Front view mirror.

### Optional

|                                                                 |                                                       |
|-----------------------------------------------------------------|-------------------------------------------------------|
| <b>02941</b> Chassis front execution: bottom plate              | <b>01891</b> Hazard beacons on cab front, prepared    |
| <b>02889</b> Chassis front execution: no bottom plate           | <b>06629</b> Two hazard beacon lights                 |
| <b>03358</b> External sun visor                                 | <b>03232</b> Front windscreen with solar control foil |
| <b>06790</b> Aluminium ladder 1-piece                           | <b>01550</b> No front view mirror                     |
| <b>06791</b> Aluminium ladder 2-piece                           | <b>01358</b> No DAF Digital Vision System             |
| <b>01015</b> LED Skylights; aux. LED lights on cab rf, prepared | <b>01913</b> DAF Corner View                          |
| <b>01925</b> Two LED work lamps for cab rear wall               |                                                       |

## AERODYNAMICS

### Optional

|                                                                |                                            |
|----------------------------------------------------------------|--------------------------------------------|
| <b>01583</b> Adj. roof air deflector; over 4 m (!) for XG+ cab | <b>04906</b> Side collars, one side hinged |
| <b>04905</b> No side collars                                   |                                            |

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

## CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Argenta; Driver seat: Luxury Air; Arm rest at both sides of the driver seat; Co-driver seat: cinema + table; fabric cover; Dashboard table; Storage compartment with drawer in centre; Upper bunk; Automatic Cab Climate Control; Auxiliary cab heater (water); Roof hatch, electric control.

### Optional

|                                              |                                                               |
|----------------------------------------------|---------------------------------------------------------------|
| <b>02043</b> Dashboard finish: Vision        | <b>02854</b> Xtra Comfort mattress for lower bunk             |
| <b>02350</b> Cab interior decoration: Natura | <b>02858</b> Xtra Comfort mattress for adjustable lower bunk  |
| <b>07736</b> Driver seat: Super Air          | <b>01775</b> Xtra Comfort mattress with topper for lower bunk |
| <b>07737</b> Driver seat: Xtra Leather Air   | <b>02380</b> Mattress for DAF Relax Bed                       |
| <b>02241</b> Driver seat, swivel base        | <b>04150</b> Mattress with topper for DAF Relax Bed           |
| <b>04050</b> Refrigerator and drawer         | <b>01967</b> Park air conditioning, integrated                |
| <b>04069</b> Two refrigerators               |                                                               |

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

### Optional

|                                                                 |                                                          |
|-----------------------------------------------------------------|----------------------------------------------------------|
| <b>09681</b> Preparation for Maut                               | <b>03684</b> Infotainment including DAF Truck Navigation |
| <b>03470</b> Infotainment incl. DAF Truck Nav. and tablet prep. |                                                          |

## SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

|                                                          |                                                     |
|----------------------------------------------------------|-----------------------------------------------------|
| <b>08631</b> Air bag (driver) and 2 seat belt tensioners | <b>03628</b> DAF drowsiness & distraction detection |
| <b>02178</b> Main switch with second control in the cab  | <b>00795</b> Safety regulations EC ADR              |
| <b>02569</b> No Driver State Monitoring                  | <b>01952</b> No DAF Side/Turn Assist                |

## SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 8.0t; Lifting device.

### Optional

|                                      |                                   |
|--------------------------------------|-----------------------------------|
| <b>06257</b> Front axle load 9.00 t  | <b>04057</b> Rear axle HR1356     |
| <b>06095</b> Front axle load 10.00 t | <b>04588</b> Rear axle SR1347     |
| <b>04647</b> Front springs air       | <b>08191</b> Axle load monitoring |

## WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P; R2,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P.

### Optional

|                                   |
|-----------------------------------|
| <b>16152</b> Tyre makes and types |
|-----------------------------------|

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

### Optional

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| <b>07110</b> Eco performance                  | <b>08371</b> Long Combination Vehicle (LCV)                |
| <b>02314</b> Gearbox overdrive                | <b>09638</b> Off-road applications                         |
| <b>07101</b> Standard transport, Lite version | <b>01498</b> Off-road applications with Rock-free function |
| <b>09636</b> Heavy haulage                    | <b>02843</b> Mechanical differential lock                  |
| <b>09637</b> Liquid transport                 |                                                            |

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

### Optional

|                                              |                                                               |
|----------------------------------------------|---------------------------------------------------------------|
| <b>02287</b> Exhaust brake                   | <b>01572</b> Park brake control electro-pneumatic             |
| <b>02281</b> ZF Intarder                     | <b>01497</b> Park brake control pneumatic with spoken warning |
| <b>02304</b> MX Engine Brake and ZF Intarder | <b>04901</b> Spring brake cylinders on the first front axle   |
| <b>02715</b> ZF Intarder                     |                                                               |

## CHASSIS

Wheelbase 3.40 m / rear overhang 0.84 m; Side member height 260 mm; 510 l alu fuel tank with step LH, height 620 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

#### Optional

- 02601** Side member height 310 mm  
**03322** Rear light with bulbs
- 16157** Fuel tanks, material and sizes

### DRAWBAR AND TRAILER EQUIPMENT

JOST JSK36DV pressed steel 205+40mm; No lead-up ramps;  
Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

#### Optional

- 03178** Towing hook D= 4.3  
**07033** Trailer coupling Ringfeder D=13.7 B
- 16151** 5th wheel makes and heights

### BODIES AND PREPARATIONS FOR BODYING

#### Optional

- 02811** Tail lift connection Anderson  
**02812** Tail lift connection REMA

### POWER TAKE-OFF (PTO)

#### Optional

- 16148** PTO types and positions

### 24V POWER SUPPLY

Alternator 130 A, batteries 2x 210 Ah AGM..

#### Optional

- 08775** Alternator 150 A  
**06440** Batteries 2x230Ah

### GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 44000 kg class 2.

### APPLICATION CONDITIONS

Air intake front.

#### Optional

- 06614** Anti-dust blow-up shield  
**06620** Anti-dust blow-up shield + bugscreen

### SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

#### Optional

- 08311** Service interval extended

### VEHICLE DELIVERY

Minimum toolkit.

#### Optional

- 07569** Lifting jack

### OPTION PACKAGES


#### Optional

- 17448** Safety pack  
**17596** Executive Pack XG/XG+
- 17625** Climate Pack

Go to **DAF.com** to configure your own perfect DAF.

# XG<sup>+</sup> 450

## FTN 6X2 Tractor

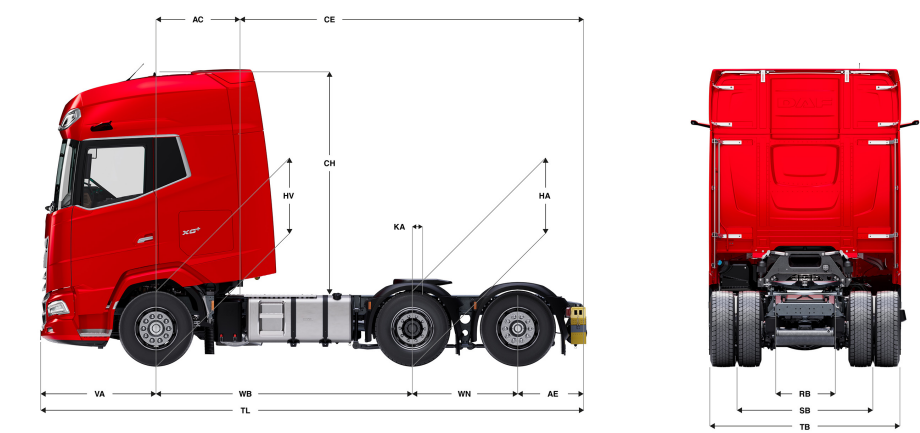

| XG+ CAB | Wheelbase - AE |                  | Unladen weight <sup>1)</sup> |      |       | Gross Carrying Capacity |       |       | Variable dimensions |      |      |                  |      |                  |                  |                  |                   |
|---------|----------------|------------------|------------------------------|------|-------|-------------------------|-------|-------|---------------------|------|------|------------------|------|------------------|------------------|------------------|-------------------|
|         | WB             | AE <sup>5)</sup> | Front                        | Rear | Total | Front                   | Rear  | Total | AC                  | CE   | CH   | KA <sup>6)</sup> | TL   | HA <sup>7)</sup> | HA <sup>8)</sup> | TK <sup>9)</sup> | TW <sup>10)</sup> |
|         | 3,40           | 0,84             | 5443                         | 3395 | 8838  | 2557                    | 15605 | 17162 | 1,16                | 4,48 | 3,00 | -0,03            | 7,17 | 0,97             | 0,94             | 12,47            | 13,82             |
|         | 3,70           | 1,10             | 5328                         | 3278 | 8607  | 2672                    | 15722 | 17393 | 1,16                | 5,04 | 2,95 | 0,00             | 7,73 | 1,02             | 0,99             | 13,24            | 14,62             |

|                  |          |          |                          |                          |          |          |                          |
|------------------|----------|----------|--------------------------|--------------------------|----------|----------|--------------------------|
| OTHER DIMENSIONS | VA: 1,53 | WN: 1,40 | HV <sup>11)</sup> : 0,96 | HV <sup>12)</sup> : 0,92 | RB: 0,79 | SB: 1,82 | TB <sup>13)</sup> : 2,48 |
|------------------|----------|----------|--------------------------|--------------------------|----------|----------|--------------------------|

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 510 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB.

6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).

8) Laden height at centre of driven axle(s).

9) TK = turning circle between kerbs.

10) TW = turning circle between walls.

11) Unladen height at centre of front axle(s).

12) Laden height at centre of front axle(s).

13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.