

Specification sheet

XD 220

FA 4X2 Rigid, Electric



ENGINES

XD BEVNewGen rnal (mbusti / No hp listing)

XD BEVNewGen 170 rnal (mbusti / No hp listing)

XD BEVNewGen 220 rnal (mbusti / No hp listing)

XD BEVNewGen 270 rnal (mbusti / No hp listing)

XD BEVNewGen 310 rnal (mbusti / No hp listing)

GVM¹⁾

18000 kg

Max. front 8000 kg

Max. rear 11500 kg

GCM²⁾

21500 kg

016F0100AAAA - 202545A - 10-07-2025

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm.; Cab suspension mechanical; LED head lights; No DAF Digital Vision System; DAF Corner View; Rear view camera.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
02889 Chassis front execution: no bottom plate	06629 Two hazard beacon lights
02952 Chassis front execution: bottom plate aero	07201 Skylights
03353 Chassis front execution: protruding	03232 Front windscreen with solar control foil
07586 Chassis front execution: robust	03317 Rear window: double glass
01226 Cab suspension air	07343 Kerb view window co-driver door
04355 Air horns, prepared	01886 Laminated glass with solar control foil
00847 Air horns, single set	01354 No main mirrors
09006 Air horns, double set	01362 DAF Digital Vision System
00330 LED head and fog lights	01912 No DAF Corner View
00346 LED head and cornering lights	06497 No rear view camera
00354 LED head, cornering and fog lights	03151 Rear view camera with prep for 2nd camera
02591 High Beam Assist	

AERODYNAMICS

No roof air deflector; No roof air deflector; No side collars.

Optional

02482 Adj. rf air defl. long mid for XD Sleeper High Cab	01818 Adj. roof air deflector long low Sleeper High Cab
01698 Adj rf air defl. long high >4m(!) Sleeper High Cab	01805 Adj. roof air defl. short for Sleeper High Cab
07332 Adj. roof air deflector for Day Cab	04906 Side collars, one side hinged
07340 Adj. roof air deflector for Sleeper Cab	03074 Side collars, both sides hinged
07347 Adj. rf air defl. long mid >4m(!) Sleeper High Cab	16150 No roof air deflectors, types and settings

COLOURS

Cab colour E1980 Crystal White; Lower cab step Stone Grey; Chassis colour grey.; Colour of bumper: Crystal White.

Optional

07481 Lower cab step Brilliant White	03003 Colour of bumper: grey
04868 Lower cab step Crystal White	02989 Colour of bumper: Brilliant White
07480 Lower cab step in cab colour	02990 Colour of bumper: cab colour
16159 No cab and chassis colours	

CAB INTERIOR

Steering wheel, black; Cab interior trim colour: Luxury; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Automatic Temperature Control and airco; Park air conditioning, integrated.

Optional

02354 Steering wheel with silver accents	03848 Co-driver seat: cinema with leather cover
02355 Steering wheel, leather	07746 Co-driver seat: Super Air
02353 Cab interior decoration: Argenta	03862 Co-driver seat: cinema + table; leather cover
02350 Cab interior decoration: Natura	07748 Co-driver seat: Xtra Leather Air
07733 Driver seat: Luxury Air	02117 Third seat
07736 Driver seat: Super Air	02837 Dashboard table
07737 Driver seat: Xtra Leather Air	03948 Single drawer
03461 Co-driver seat: cinema + table; fabric cover	03954 Refrigerator
07741 Co-driver seat: Comfort Air	02838 Foam mattress for lower bunk
03781 Co-driver seat: cinema with alcantara cover	02854 Xtra Comfort mattress for lower bunk
07743 Co-driver seat: Luxury Air	01775 Xtra Comfort mattress with topper for lower bunk
03849 Co-driver seat: cinema + table; alcantara cover	04258 Roof hatch, electric control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85/90 km/h; Infotainment basic; Adaptive Cruise Control with FCW and AEBS-3; Predictive Cruise Control.

Optional

07020 PACCAR Connect with navigation	03684 Infotainment including DAF Truck Navigation
07021 PACCAR Connect with navigation and tablet software	01219 Speakers: Exclusive
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	03628 DAF drowsiness & distraction detection
02567 No Traffic Sign Assist	01929 No Drive-off Assist
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Front springs parabolic; Rear axle SR1344; Rear springs air; Rear axle load 13.00 t; Rear: air suspension, SR1344; No lifting device.

Optional

04813 Front: 8.00 t, parabolic, 165N	07114 Front: 10.00 t, parabolic, 203L
02509 Front: 8.00 t, parabolic, 167N	02460 Front: 8.00 t, air suspension, 161N
02426 Front: 9.00 t, parabolic, 183N	04647 Front springs air
00300 Front: 9.00 t, parabolic, 187N	08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Goodyear; Tyre pressure monitoring.

Optional

08101 No tyre pressure monitoring **16152** Tyre makes and types

DRIVELINE

; 220 kW; 150 kW DC charging; Rear axle ratio 2.05; No differential lock.

Optional

01656 Electric motor type EX-D2 **01749** Charging: 150 kW DC + 22 kW AC
01664 170 kW
01686 270 kW **01756** 325 kW DC charging
01691 310 kW **03677** Charging: 325 kW DC + 22 kW AC
01692 350 kW **02843** Mechanical differential lock

BRAKE SYSTEM

Park brake control electro-pneumatic; No brake resistor; Park brake electro-pneumatic; Driven rear axle with disc brakes.

Optional

04901 Spring brake cylinders on the first front axle **03969** Park brake assist
01857 Brake resistor

CHASSIS

Wheelbase 4.30 m / rear overhang 1.80 m; Side member 260/7.0 mm, full length reinforcement; Side member height 260 mm; No HV battery pack at position L1; HV battery pack at position L2; No HV battery pack at position L3; No HV battery pack at position R1; HV battery pack at position R2; No HV battery pack at position R3.

Optional

02601 Side member height 310 mm **01701** 5 HV battery packs
01696 2 HV battery packs **16157** Fuel tanks, material and sizes
01699 4 HV battery packs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

BODIES AND PREPARATIONS FOR BODYING

Optional

09421 Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

01809 E-PTO socket 650V DC < 25 kW **07853** ePTO control at ignition OFF
04320 E-PTO socket 650V DC < 90 kW **07852** ePTO control at ignition ON

24V POWER SUPPLY

Batteries 2x 175 Ah..

GVM AND GCM

Chassis weight related technical GVM max 20500 kg; Driveline related max GCM 21500 kg.

Optional

01933 Driveline related max GCM 42000 kg **02200** Driveline related max GCM 46000 kg class 2
01937 Driveline related max GCM 46000 kg **03675** Driveline related max GCM 50000 kg class 3

APPLICATION CONDITIONS

Regular cab insulation.

Optional

02260 Extra cab insulation

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

VEHICLE DELIVERY


Optional

02008 No toolkit **06491** Toolkit Eastern Europe
02019 Standard toolkit

Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XD 220

FA 4X2 Rigid, Electric

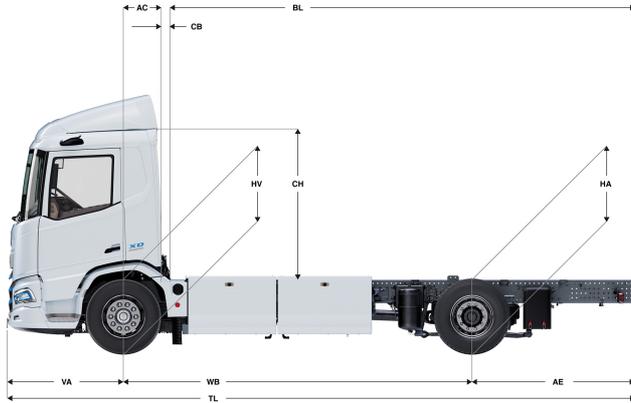

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	3,90	1,30	5472	3238	8709	2528	8262	9291	0,50	0,07	2,06	5,00	5,31	6,73	0,97	0,94	13,76	15,14
	4,30	1,80	5621	3200	8821	2379	8300	9179	0,50	0,07	2,06	5,71	6,07	7,63	0,97	0,94	14,79	16,20
	4,50	1,95	5709	3188	8896	2291	8312	9104	0,50	0,07	2,06	6,09	6,46	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	5766	3148	8915	2234	8352	9085	0,50	0,07	2,06	6,46	6,84	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	5821	3146	8966	2179	8354	9034	0,50	0,07	2,06	6,82	7,22	8,78	0,97	0,94	16,35	17,78
	5,10	2,75	5859	3154	9013	2141	8346	8987	0,50	0,07	2,06	7,17	7,59	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	5942	3090	9032	2058	8410	8968	0,50	0,07	2,06	7,73	8,19	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	6040	3081	9121	1960	8419	8879	0,50	0,07	2,06	8,30	8,78	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	6125	3053	9178	1875	8447	8822	0,50	0,07	2,06	9,06	9,57	10,43	0,97	0,94	19,49	20,96
SLEEPER CAB	3,90	1,30	5590	3231	8821	2410	8269	9179	0,83	0,07	2,06	4,40	4,72	6,73	0,97	0,94	13,76	15,14
	4,30	1,80	5739	3194	8933	2261	8306	9067	0,83	0,07	2,06	5,12	5,49	7,63	0,97	0,94	14,79	16,20
	4,50	1,95	5826	3182	9008	2174	8318	8992	0,83	0,07	2,06	5,50	5,89	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	5884	3143	9026	2116	8357	8974	0,83	0,07	2,06	5,87	6,27	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	5938	3140	9078	2062	8360	8922	0,83	0,07	2,06	6,24	6,65	8,78	0,97	0,94	16,35	17,78
	5,10	2,75	5976	3149	9124	2024	8351	8876	0,83	0,07	2,06	6,60	7,03	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	6059	3085	9144	1941	8415	8856	0,83	0,07	2,06	7,16	7,62	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	6156	3076	9233	1844	8424	8767	0,83	0,07	2,06	7,74	8,23	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	6241	3049	9289	1759	8451	8711	0,83	0,07	2,06	8,49	9,02	10,43	0,97	0,94	19,49	20,96
SLEEPER HIGH CAB	3,90	1,30	5620	3230	8851	2380	8270	9149	0,83	0,07	2,54	4,41	4,73	6,73	0,97	0,94	13,76	15,14
	4,30	1,80	5769	3194	8963	2231	8306	9037	0,83	0,07	2,54	5,14	5,51	7,63	0,97	0,94	14,79	16,20
	4,50	1,95	5857	3181	9038	2143	8319	8962	0,83	0,07	2,54	5,52	5,90	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	5914	3142	9056	2086	8358	8944	0,83	0,07	2,54	5,89	6,29	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	5968	3140	9108	2032	8360	8892	0,83	0,07	2,54	6,25	6,67	8,78	0,97	0,94	16,35	17,78
	5,10	2,75	6006	3148	9154	1994	8352	8846	0,83	0,07	2,54	6,61	7,05	9,38	0,97	0,94	16,87	18,31
	5,40	2,65	6089	3085	9173	1911	8415	8827	0,83	0,07	2,54	7,19	7,64	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	6186	3076	9262	1814	8424	8738	0,83	0,07	2,54	7,77	8,26	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	6271	3048	9319	1729	8452	8681	0,83	0,07	2,54	8,52	9,05	10,43	0,97	0,94	19,49	20,96

OTHER DIMENSIONS VA: 1,53 HV¹³⁾: 0,95 HV¹⁴⁾: 0,89 RB: 0,79 SB: 1,82 TB¹⁵⁾: 2,48

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with driver of [0] kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- Based on basic specification.
- Cab height is measured from frame member to closed cabin roof hatch.
- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.